


Specifications

Current Rate:1 AMP
 Insulation Resistance:1000M Ω Min
 Contact Resistance:35m Ω Max
 Dielectric voltage:500V AC for one minute
 Operation Temperature:-55°C to +85°C




Material


Insulator:P.B.T, UL94V-0
 Terminal:Copper Alloy

ORDER INFORMATION

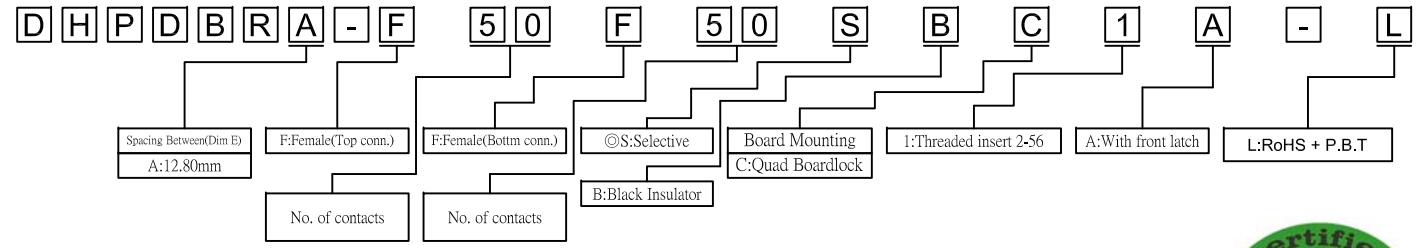

⊙:Standard Recommend

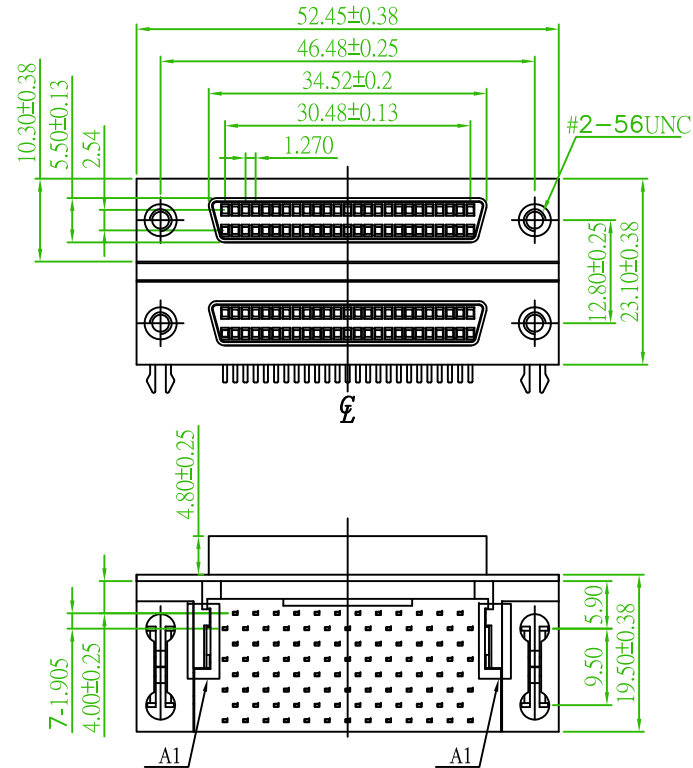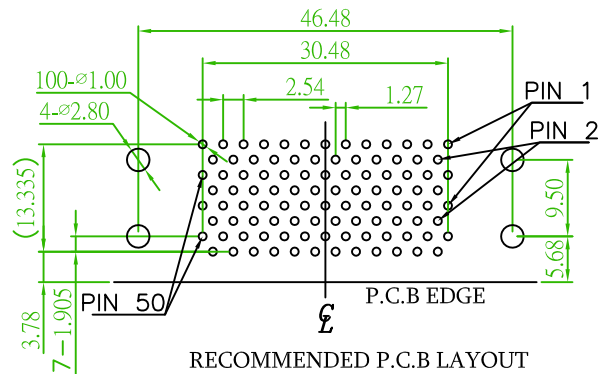

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL:886-2-2260-6878 FAX:886-2-2260-8030	品名 TITLE	SCSI D-SUB DUAL PORTS RIGHT ANGLE				
	品號 PART NO.	DHPDBRA-F50F50SBC1A-L			日期 DATE	2016/06/29
	圖號 DRAWING NO.	版本 REV.	A	繪圖 DRAWN	Roy	
	客戶品號 CUSTOMER P/N	比例 SCALE	FREE	核對 CHECKED	David	
	公差 TOLERANCE	.XX ±0.25 .XXX ±0.23	單位 UNIT	mm	核准 APPROVED	Boris

AREA	REV.	DESCRIPTION	DATE