


ITEM	DESC.	Q'TY	MATERIALS	TREATMENT	REMARK
1	COVER	1	STAINLESS STEEL	NONE	-
2	STEM	1	HIGH – TEMP THERMOPLASTIC NYLON UL 94V-0	→	-
3	CONTACT	1	PHOSPHOR BRONZE	WITH SILVER CLADDING	-
4	BASE	1	HIGH – TEMP THERMOPLASTIC NYLON UL 94V-0	MOLDED BROWN	-
5	TERMINAL	1	BRASS	WITH SILVER PLATING 0.5uM	-

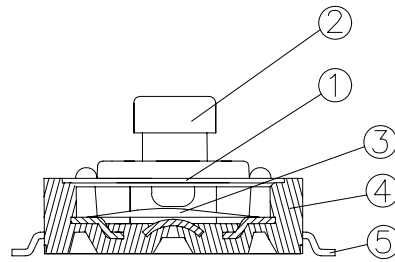

DTSM-2

Prod. No. : DTSM-2 □ □ -V- □

Surface – Mounting Type

Package Style:  
B = Tube  
T/R = Tape & Reel

Total Height

- 1 = 4.3 mm
- 3 = 7.4 mm
- 4 = 7.3 mm
- 5 = 8.5 mm

V=Lead Free

Color Of Stem For  
Operating Force :  
R/W=White,260g  
N = Brown ,160g  
R = Red ,260g  
S = Salmon,320g  
Y = Yellow,520g

A	DWG.REL.	
REV.	ECO. NO.	APPD.

TITLE: SMT TACT SWITCH 12X12	APPD. :
	CHKD. :
PRROD.NO. :DTSM-2□ □ -V-□	PR. : paggy
FILE NO. :E-V-CT09	REV :A SHEET :1 of 1