




B (Y 5P)

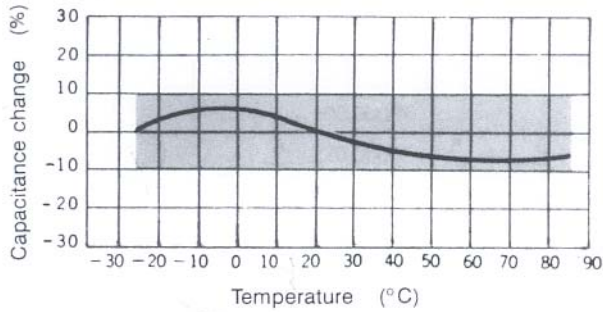

F (Y5V, Z5V)

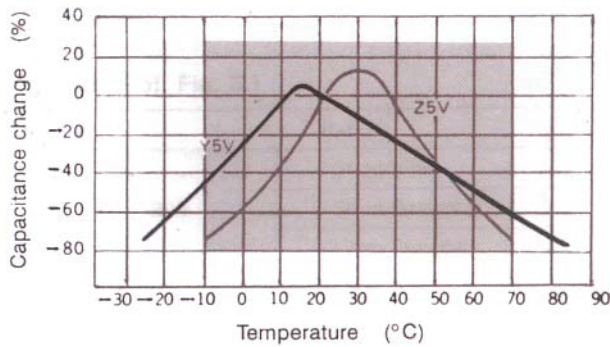

E (Y5U, Z5U)

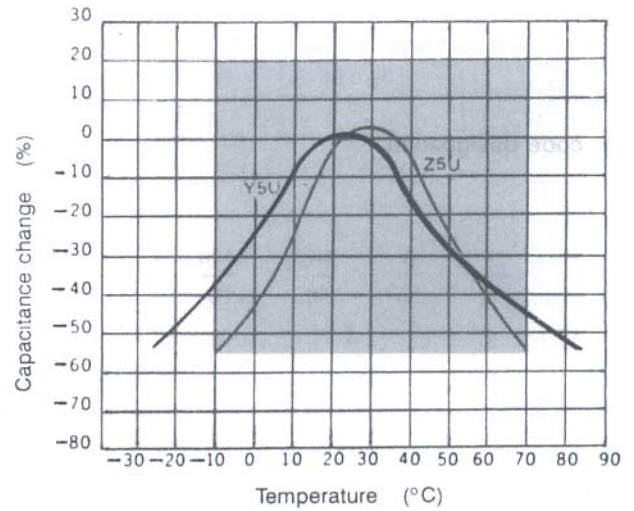

Item	Performance	Test Method
Visual & Mechanical	To meet specification	The Product shall be inspected for visible evidence of defect.
Marking	To be clear and legible	Marking shall be tested with ace ton
Voltage Proof (between terminal)	No failure	2.5 times the rated voltage shall be applied for 1 to 5 sec. Charging and discharging current shall be limited to 50mA max.
Insulation Resistance	10,000MΩ min	Shall be measured 1 minute after with rated voltage
Capcitanace	To be within the specified tolerance	Test frequency: 1KHz ± 100Hz Test voltage shall not exceed 5Vrms at 25±2° C
Dissipation Factor (Tan δ) (%)	Characteristic B.E.:2.5% max F: 5%max.	Same condition as above.