







## FPC/FFC 1.0mm Non ZIF SMT Type Side Entry

### Specifications

Current Rate:0.5 AMP  
 Insulation Resistance:500MΩ Min.  
 Contact Resistance:30mΩ Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-55°C to +85°C

### Material

Insulator:Polyester,UL 94V-0  
 ©Standard:Nylon 46  
 Terminal:Copper Alloy  
 Plated:Tin Plated

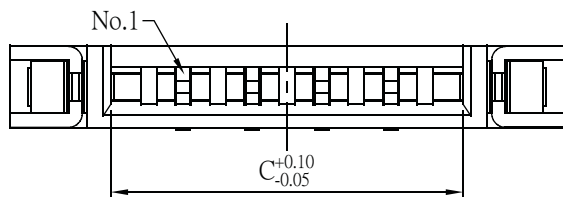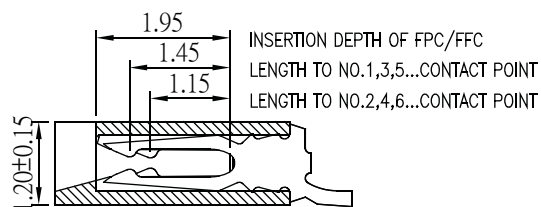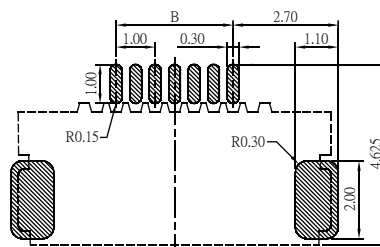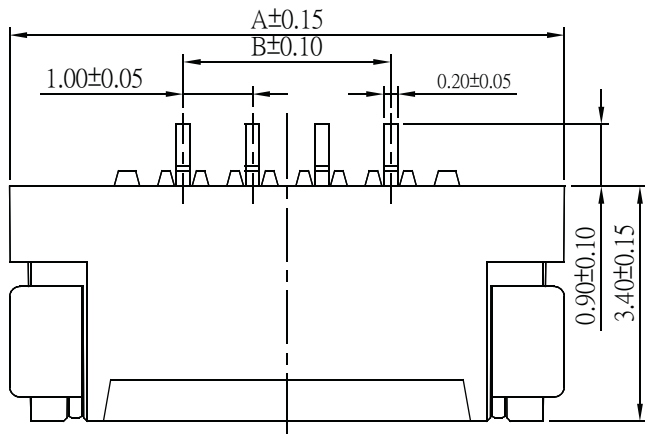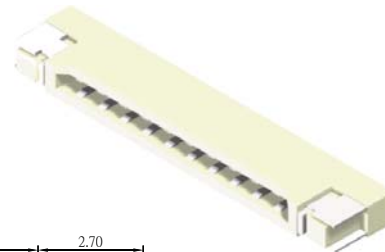

| No. of Contacts | Dimensions |       |       | No. of Contacts | Dimensions |       |       |
|-----------------|------------|-------|-------|-----------------|------------|-------|-------|
|                 | A          | B     | C     |                 | A          | B     | C     |
| 04              | 8.03       | 4.00  | 5.10  | 15              | 19.03      | 15.00 | 16.10 |
| 05              | 9.03       | 5.00  | 6.10  | 16              | 20.03      | 16.00 | 17.10 |
| 06              | 10.03      | 6.00  | 7.10  | 17              | 21.03      | 17.00 | 18.10 |
| 07              | 11.03      | 7.00  | 8.10  | 18              | 22.03      | 18.00 | 19.10 |
| 08              | 12.03      | 8.00  | 9.10  | 19              | 23.03      | 19.00 | 20.10 |
| 09              | 13.03      | 9.00  | 10.10 | 20              | 24.03      | 20.00 | 21.10 |
| 10              | 14.03      | 10.00 | 11.10 | 21              | 25.03      | 21.00 | 22.10 |
| 11              | 15.03      | 11.00 | 12.10 | 22              | 26.03      | 22.00 | 23.10 |
| 12              | 16.03      | 12.00 | 13.10 | 23              | 27.03      | 23.00 | 24.10 |
| 13              | 17.03      | 13.00 | 14.10 | 24              | 28.03      | 24.00 | 25.10 |
| 14              | 18.03      | 14.00 | 15.10 |                 |            |       |       |

## ORDER INFORMATION

