

## SPECIFICATIONS

Current Rating: 1Amps

Voltage Rating: 50V

Contact Resistance: 20m Ω Max

Insulation Resistance: 500M Ω Min

Withstanding Voltage: 500V AC for 1 minute

Temperature Range: -25°C to +85°C

Insulator: Nylon 66, UL94V-0, White





## ORDER INFORMATION

H 1500 - XX

Series No.

No. of Contacts

No. of Contacts	Dimension	
	A	B
2	1.50	4.50
3	3.00	6.00
4	4.50	7.50
5	6.00	9.00
6	7.50	10.50
7	9.00	12.00
8	10.50	13.50
9	12.00	15.00
10	13.50	16.50
11	15.00	18.00
12	16.50	19.50
13	18.00	21.00
14	19.50	22.50
15	21.00	24.00
16	22.50	25.50

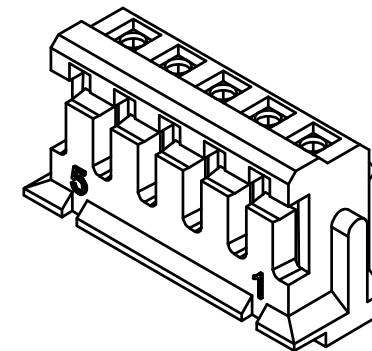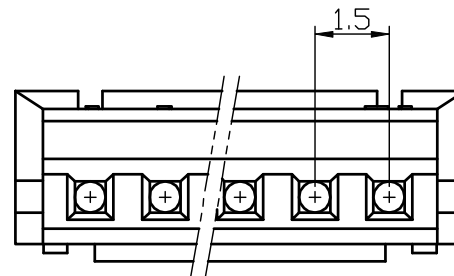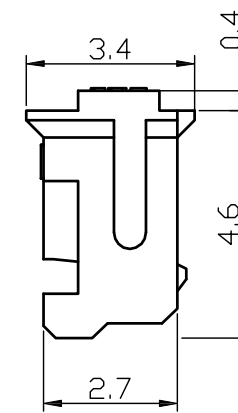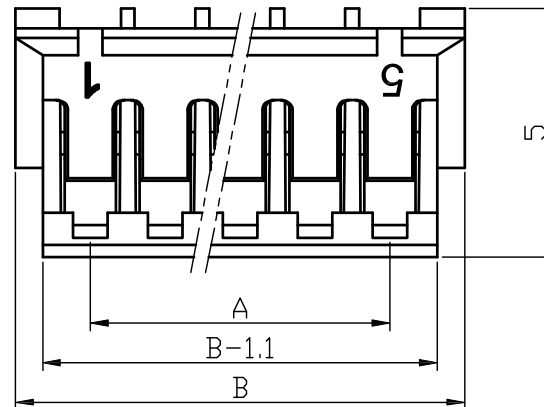

Morecrafts Technology

TEL: +886-2-2966-1326  
FAX: +886-2-2966-1352  
www.morecrafts.com.tw

PART NO.	H1500-XX	DRAWN	Andrew
DRAWING NO.	H1500-XX	CHECKED	Claudia
DATE	2018/05/28	APPROVED	Brian

TITLE:	Pitch 1.50mm Housing	REV.	A0	TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm	NO.	DESCRIPTION	DATE
--------	----------------------	------	----	-----------	-----------------------	-------	-----	------	----	-----	-------------	------