

LOW-PROFILE SURFACE MOUNT MIL-STD-1553 PULSE TRANSFORMERS

FEATURES

- **Low Cost**
- **Moisture Sensitivity Rating Level 1**
- **For use in MIL-STD-1553A and B, MacAir A-3818, A-5690, A-5232, and A-4905**
- **Qualification tested to MIL-PRF-21038**
- **Tested to M-Level and T-Level (Optional) of MIL-PRF-21038**
- **-55°C to +130°C Operating Temperature Range**
- **Robust Lead Design for Improved Coplanarity**

Description and Applications

The military data bus specification, MIL-STD-1553, has brought about the need for versatile pulse transformers that meet all the electrical requirements of Manchester II serial bi-phase data transmission. The LPB-5000 series of transformers provide the turns ratio configurations, component isolation, and common mode rejection ratio characteristics necessary for MIL-STD-1553A and B compliance.

The step-up and step-down ratios that are available with the LPB-5000 series complement DDC's entire MIL-STD-1553 product line and are compatible with competitors' drivers, receivers, and transceivers. These transformers are low-profile, modular units that are multitapped to accommodate existing system configurations. Encapsulated in accordance with MIL-PRF-21038, their C5191 Phosphor Bronze, Sn90 plated leads conveniently accommodate printed circuit board mounting. Sinusoidal or trapezoidal waveforms are accurately processed, making the LPB-5000 series of transformers an excellent choice for any MIL-STD-1553A or B application.

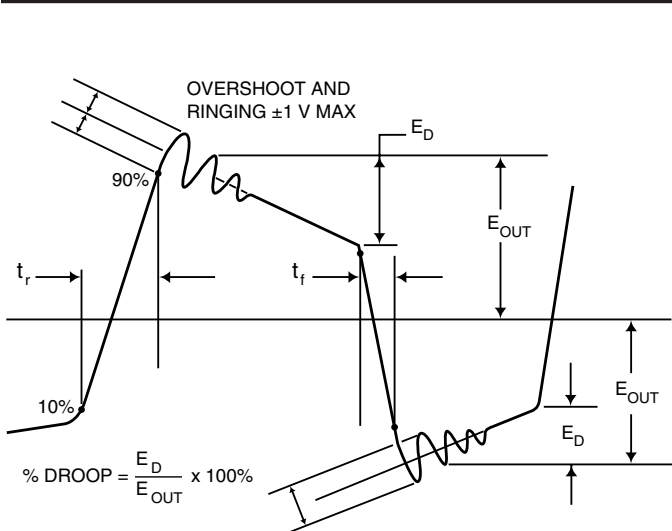


FIGURE 1. WAVEFORM INTEGRITY

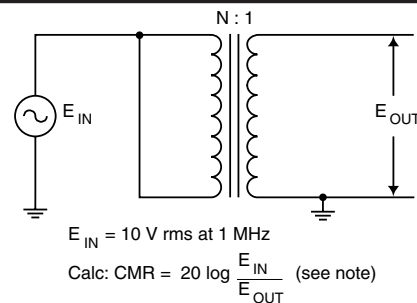


FIGURE 2. CIRCUIT FOR COMMON MODE REJECTION

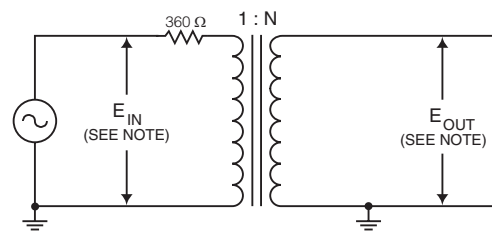


FIGURE 3. CIRCUIT FOR WAVEFORM INTEGRITY

Notes: 1) Input to be applied and output to be measured for all dash numbers are as shown. N represents highest turns winding in each test.
 2) For LPB-5033, the 360 Ω resistor is replaced with a 50 Ω resistor for conducting waveform test.

TABLE 1. LPB-5000 SERIES SPECIFICATIONS

PARAMETER	UNIT	VALUE	REMARKS
Case	—	—	Flame Resistant, Diallyl Phthalate
Terminals	—	—	C5191 Phosphor Bronze, Sn90 Plating
Weight	Oz.(gm)	0.105 (3) max.	
Terminal Strength	lbs	2	2 pounds applied force, Method 211, MIL-STD-202, Test condition A
Dielectric Withstanding Voltage	Vrms	100	Method 301, MIL-STD-202
Life (expectancy "X")	Hrs	10,000 min.	In accordance with MIL-PRF-21038
Insulation Resistance	MΩ	1,000 min.	At 250 Vdc using method 302, test condition B, MIL-STD-202
Pulse Width (of Output Pulse)	μs	2	Tested using FIGURE 3 with resulting FIGURE 1 waveform.
Overshoot	V	± 1 max.	Tested using FIGURE 3 with resulting FIGURE 1 waveform.
Rise Time (of Output Pulse)	ns	—	Tested using FIGURE 3 with resulting FIGURE 1 waveform. See respective ELECTRICAL CHARACTERISTICS TABLE
Common Mode Rejection	dB	≥ 45	Tested using FIGURE 2.
Operating Temperature Range	°C	-55 to +130	—
Storage Temperature Range	°C	-65 to +130	—
Droop	%	≤ 20	Tested using FIGURE 3 with resulting FIGURE 1 waveform.
DC Resistance	Ω	—	See respective Electrical Characteristics Table
Input Impedance	Ω	—	See respective Electrical Characteristics Table. Tested at 75 kHz and 1 MHz over entire operating temperature range.

CONFIGURATION


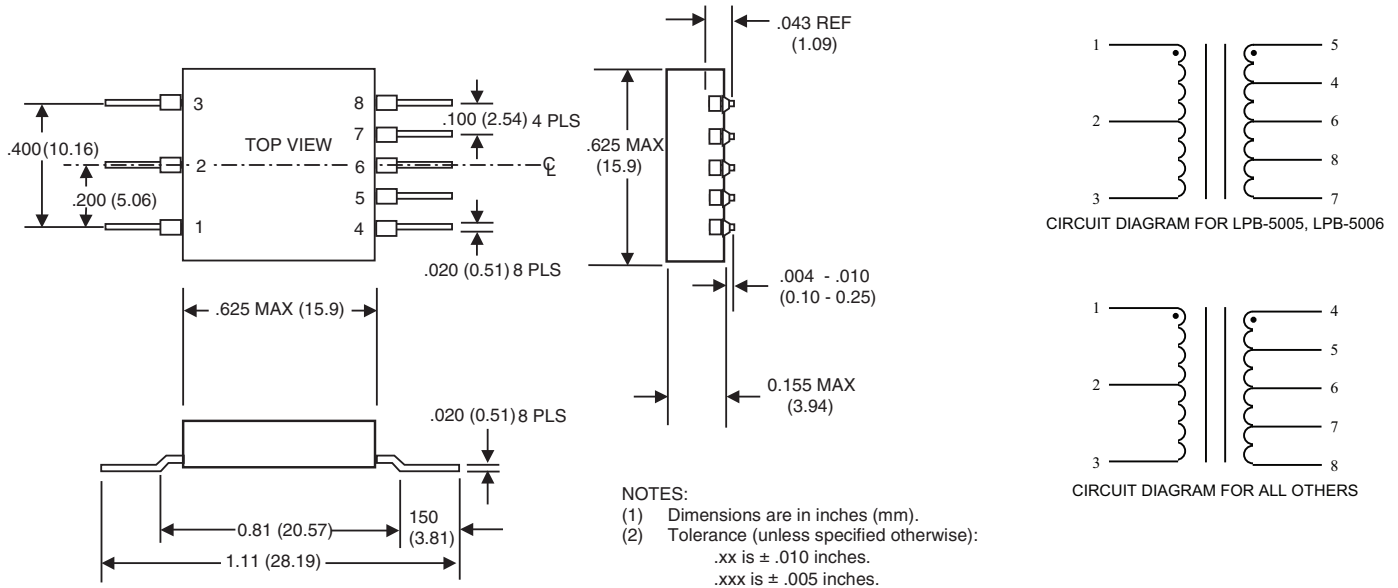


TABLE 2. ELECTRICAL CHARACTERISTICS

BETA P/N	TURNS RATIO	PRIMARY	SECONDARY	DC RESISTANCE Ω (MAX)	OUTPUT RISE TIME NSEC (MAX)	IMPEDANCE Ω (MIN)
LPB-5000	2:5 ±3% 4:7 ±3%	1-3 1-3	4-8 5-7	(1-3) 3.5 (4-8) 3.0	150	(4-8) 3,000
LPB-5001	1:0.83 ±3% 1:0.60 ±3%	1-3 1-3	4-8 5-7	(1-3) 3.0 (4-8) 3.0	150	(1-3) 3,000
LPB-5002	1.4:1 ±3% 2:1 ±3%	1-3 1-3	4-8 5-7	(1-3) 3.5 (4-8) 3.0	150	(1-3) 7,200
LPB-5003	1:1 ±3% 1:0.707 ±3%	1-3 1-3	4-8 5-7	(1-3) 3.0 (4-8) 3.0	150	(1-3) 4,000
LPB-5004	1.25:1 ±3% 1.66:1 ±3%	1-3 1-3	4-8 5-7	(1-3) 3.2 (4-8) 3.0	150	(1-3) 4,000
LPB-5005	2.3:1 ±3% 3.2:1 ±3%	4-8 5-7	1-3 1-3	(1-3) 1.2 (4-8) 3.0	150	(5-7) 3,000
LPB-5006	2.12 :1 ±3% 1.5 :1 ±3%	4-8 5-7	1-3 1-3	(1-3) 1.1 (4-8) 3.0	200	(4-8) 4,000
LPB-5015	1:2.5 ±3% 1:1.79 ±3%	1-3 1-3	4-8 5-7	(1-3) 1.0 (4-8) 3.0	250	(4-8) 3,000
LPB-5033	1: 3.75 ±3% 1: 2.70 ±3%	1-3 1-3	4-8 5-7	(1-3) 0.25 (4-8) 3.0	250	(4-8) 3,000

Notes:
 1) These transformers have been classified as IPC-9503 Level 1 and are not moisture sensitive. To ensure product integrity and maintain the product warranty, the reflow process must not cause the peak body temperature of the device to exceed 225°C and must not expose the device to temperatures above 183°C for more than 90 seconds. Tape and Reel packaging is available upon request. Contact factory for further information.

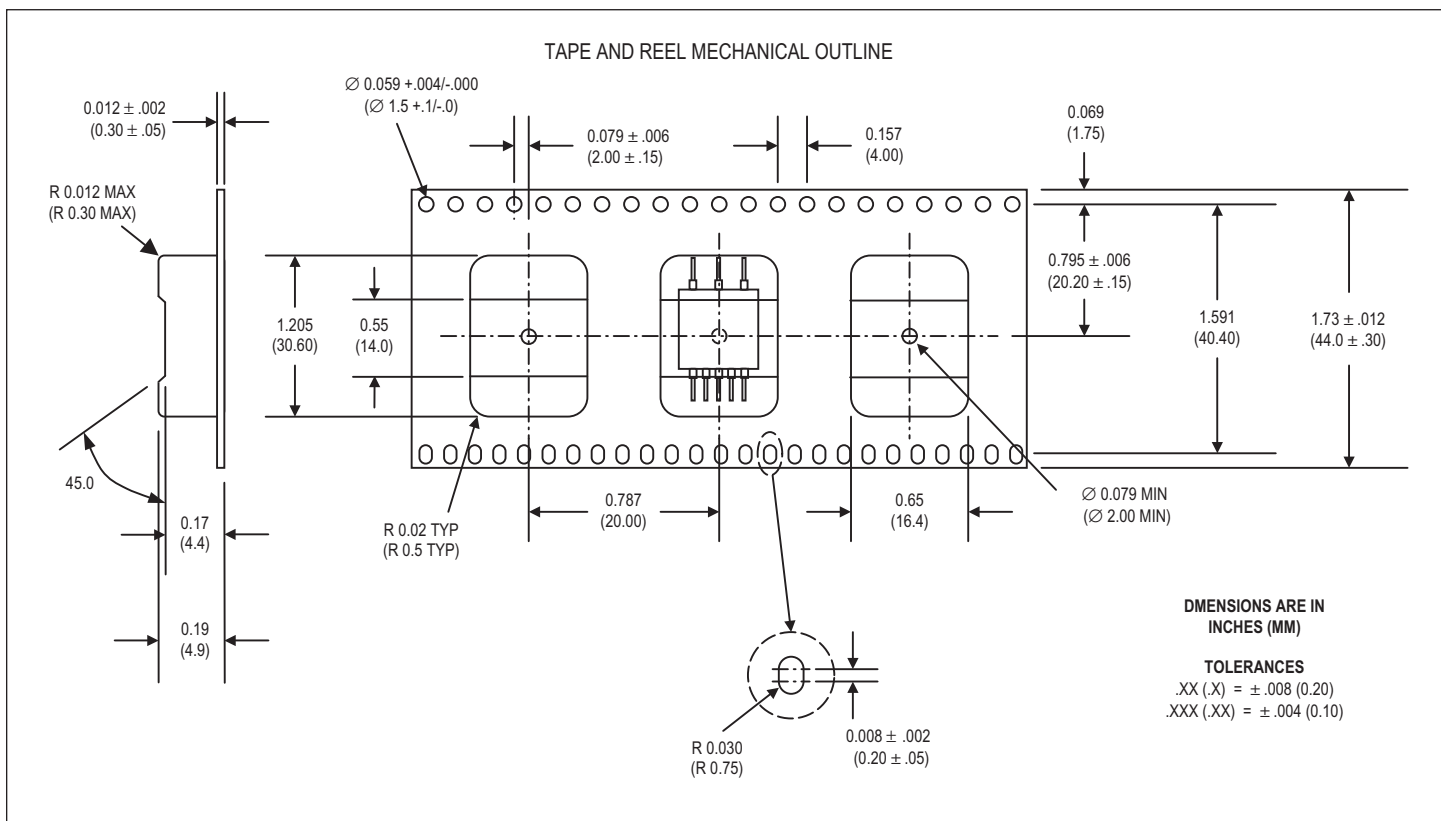

The information in this data sheet is believed to be accurate; however, no responsibility is assumed by Beta Transformer Technology Corporation for its use, and no license or rights are granted by implication or otherwise in connection therewith. Specifications are subject to change without notice.

Visit our Web site at www.bttc-beta.com for the latest information.

