



CHAMPION

承认书 (APPROVAL SHEET)

品名 PART NAME	METALLIZED POLYPROPYLENE FILM CAPACITOR (MPP-QP)
承认规格 APPROVE ITEM	474J630V P=15mm
全鹏料号 CHAMPION PART NO	MPP474J0630D171307B1523
客户名称 CUSTOMER	艾贝仕
客户料号 PART NO	
送样承认日期 DATE	2019.7.30

承认印  
APPROVAL STAMP

供应商  
VENDER

客户  
CUSTOMER

东莞市全鹏电子科技有限公司



联系人: 13929202898

东莞市茶山镇卢边恒兴昌工业园B栋4楼  
TEL:0769-86862908 FAX:0769-86862918  
www.champion-dg.com



CHAMPION

东莞市全鹏电子科技有限公司

版本

1/A

文件名称

MPP Approval Sheet-QP  
(MPP-TYPE Metallized Polypropylene  
Film Interference Suppression Capacitor)

文件编号

QP-AP-28

页码

1/6

1. Scope:

This specification applied to capacitor for type MPP (Metallized Polypropylene Film Capacitor)

2. Operation Temperature:

-40°C ~ +105°C

3. Capacitance Range:

0.001uF ~ 15 uF

4. Capacitance Tolerance:

±2%(G)、±3%(I)、±5%(J)、±10%(K)、±20%(M)

5. Rated Voltage:

50VDC、63VDC、100VDC、250VDC、400VDC、500VDC、630VDC、1KVDC

6. champion Part No.:

<u>□□□</u>	<u>□□□</u>	<u>□</u>	<u>□□□□</u>	<u>□</u>	<u>□□□□□□</u>	<u>□</u>	<u>□□</u>	<u>□□</u>
1	2	3	4	5	6	7	8	9
(tape)	(capacitance)	(tolerance)	(rated voltage)	(Dc/Ac)	(Size)	(lead forming)	(lead pitch)	(lead length)

6-1 tape:

Code	PEI	MEF	MEM	MPP	PEN	PPN	PPS	MEC	MET
Tape	PEI	MEF	MEM	MPP	PEN	PPN	PPS	MEC	MET

6-2 Capacitance:

Code	101	102	103	104	105	106
Capacitance	0.0001uF	0.001uF	0.01uF	0.1uF	1uF	10uF

6-3 Tolerance:

Code	F	G	H	I	J	K	M
Tolerance	±1%	±2%	±2.5%	±3%	±5%	±10%	±20%



CHAMPION

东莞市全鹏电子科技有限公司

版本

1/A

文件名称	MPP Approval Sheet-QP (MPP-TYPE Metallized Polypropylene Film Interference Suppression Capacitor)	文件编号	QP-AP-28	页码	2/6
------	---	------	----------	----	-----

6-4 Rated Voltage: Showing the real working voltage indicated. For example: 0630 -> 630V, 1000 -> 1KV.

6-5 D→DC; A→AC

6-6 Size:090805→(W)9\*(H)8\*(T)5

6-7 Lead forming:

Code	B	R	U	W	T	S
Lead Forming					TAPING	Customer Special Require

6-8 Lead Pitch: Showing the capacitor lead pitch, For example:

Code	08	10	15	20	28
Pitch(mm)	7.5mm	10mm	15mm	20mm	27.5mm

6-9 Lead length: Showing the capacitor lead Length, For example:

Code	04	08	10	13	23	30	40
Length(mm)	4mm	8mm	10mm	13mm	23mm	30mm	40mm

7. Specifications ( JIS 5115、IEC384-16)

No	Test items	Performance	Test Method
7-1	Withstand voltage (Between Terminals)	Shall be no abnormality	150% Of Rated Voltage, 60sec.
	Between terminal and Enclosure	Shall be no abnormality	UR × 200% + 1000VDC, 60sec.
7-2	Insulation resistance (Between Terminals)	$C_R \leq 0.33\mu F$ IR ≥ 15,000MΩ $C_R > 0.33\mu F$ IR ≥ 5,000 (MΩ . uF)	Measured at 100 ± 15VDC, For 60sec / 25°C



CHAMPION

东莞市全鹏电子科技有限公司

版本

1/A

文件名称

MPP Approval Sheet-QP  
(MPP-TYPE Metallized Polypropylene  
Film Interference Suppression Capacitor)

文件编号

QP-AP-28

页码

3/6

No	Test items	Performance	Test Method
7-3	Capacitance	Within the tolerance specified	1KHz, 1Vrms Max. at 25°C
7-4	Dissipation Factor	0.001 (0.1%) Max.	1KHz, 1Vrms Max. at 25°C
7-5	Tense Strength of Terminal	No wire breakage and No Damage of Capacitor	1. Load Force : 1.0 Kg 2. Holding Time : 10 ± 1sec
7-6	Bending Strength of Terminal	No wire breakage and No Damage of Capacitor	1. Load Force : 0.5 Kg 2. Bending Time : 4 x 90° in 5sec
7-7	Vibration	(1) Appearance : No Visible Damage (2) Contact : Normal	a. Frequency change : 1min. per cycle 10~55~10Hz b. Vibration distance : 1.5mm c. course: X、Y、Z (axis) d. Time : 2h / axis ( 6h in total)
7-8	Solder-ability	75% Of The Surface Tinning	a. Solder temperature: 270 ± 5°C b. Solder time: 3 ± 0.5sec
7-9	Heat Shock test	(1) Appearance : No Visible Damage (2) Withstand Voltage : Normal (3) Capacitance Change : ≤ ±3% of The Initial Value	The terminal of capacitor shall be immersed in the melting solder. a. Solder temperature: 270 ± 5°C b. Solder time: 3 ± 0.5sec c. Test Voltage: 150% of The Rate Voltage For 1min.



CHAMPION

东莞市全鹏电子科技有限公司

版本

1/A

文件名称	MPP Approval Sheet-QP (MPP-TYPE Metallized Polypropylene Film Interference Suppression Capacitor)	文件编号	QP-AP-28	页码	4/6
------	---	------	----------	----	-----

No	Test items	Performance	Test Method
7-10	Cold Resistance	(1) Appearance : No Visible Damage (2) Capacitance Change : $\leq 0 \sim -10\%$ of The Initial Value	a. Test Temperature: $-40^{\circ}\text{C}$ b. Test Times: 2Hrs
7-11	Dry Heat Resistance	(1) Appearance : No Visible Damage (2) Withstand Voltage : Normal (3) Capacitance Change : $\leq +5 \sim -2\%$ Of The Initial Value (4) Insulation Resistance: $C_R \leq 0.33\mu\text{F}$ $IR \geq 2,700\text{M}\Omega$ $C_R > 0.33\mu\text{F}$ $IR \geq 900\text{M}\Omega$	a. TEST TEMPERATURE: $105^{\circ}\text{C} \pm 2^{\circ}\text{C}$ b. Test Times: 2Hrs
7-12	Humidity Resistance	(1) Appearance : No Visible Damage (2) Withstand Voltage : Normal (3) Capacitance Change : $\leq \pm 10\%$ of The Initial Value (4) Insulation Resistance: $C_R \leq 0.33\mu\text{F}$ $IR \geq 2,700\text{M}\Omega$ $C_R > 0.33\mu\text{F}$ $IR \geq 900\text{M}\Omega$ (5) $DF (\tan \delta) \leq 0.001$	a. TEST TEMPERATURE: $-40^{\circ}\text{C} \pm 2^{\circ}\text{C}$ b. RELATIVE HUMIDITY: $90 \sim 95\%$ c. Test Times: $240 \pm 8\text{HRS}$ d. TEST VOLTAGE: 130% of The Rated Voltage for 1 min.
7-13	Heat Resistance (Charge & Discharge)	(1) Appearance : No Visible Damage (2) $DF (\tan \delta) \leq 0.001$ (3) Capacitance Change : $\pm 10\%$ of The Initial Value (4) Insulation Resistance: Over $3000\text{M}\Omega$	a. Test Voltage : Rated Voltage Charge for 2 sec. Discharge for 2 sec. Repeated For $100,000 \pm 1000$ cycles b. Test Temperature: $105^{\circ}\text{C} \pm 2^{\circ}\text{C}$
7-14	Heat Resistance (Continuous)	(1) Appearance : No Visible Damage (2) $DF (\tan \delta) \leq 0.001$ (3) Capacitance Change : $\pm 7\%$ of The Initial Value (4) Insulation Resistance: Over $3000\text{M}\Omega$	a. Test Voltage : 125% of The Rated Voltage b. Test Temperature: $105^{\circ}\text{C} \pm 2^{\circ}\text{C}$ c. Test Times: $500 \pm 24\text{Hrs}$



CHAMPION

东莞市全鹏电子科技有限公司

版本

1/A

文件名称

MPP Approval Sheet-QP  
(MPP-TYPE Metallized Polypropylene  
Film Interference Suppression Capacitor)


文件编号

QP-AP-28

页码

5/6

8. Dimensions:

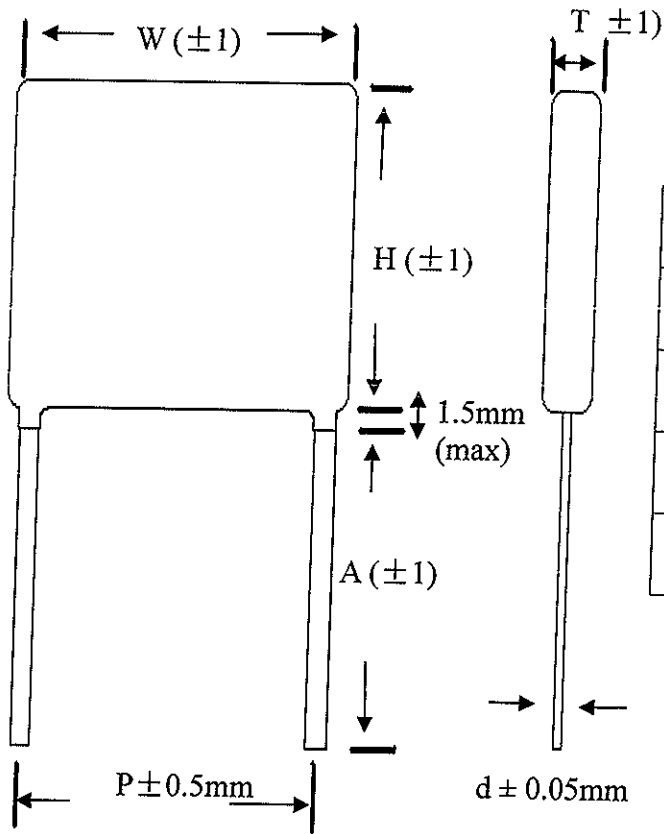

CAPACITOR BODY SIZE (Unit:mm)

CAP	RV	W ( $\pm 1$ )	H ( $\pm 1$ )	T ( $\pm 1$ )	D ( $\pm 0.05$ )
474	630	16.5	13	7.1	0.8

Lead Style

		B	K	R	U	W	T	S
							TAPING (refer to next page)	Customer Require
CAP	RV	Lead Style			$A(\pm 0.05\text{mm})$	$B(\pm 0.05\text{mm})$		
474	630	B				23		15



CHAMPION

东莞市全鹏电子科技有限公司

版本

1/A

文件名称

MPP Approval Sheet-QP  
(MPP-TYPE Metallized Polypropylene  
Film Interference Suppression Capacitor)

文件编号


QP-AP-28

页码

6/6


9. Marking:

①P ≤ 7.5mm

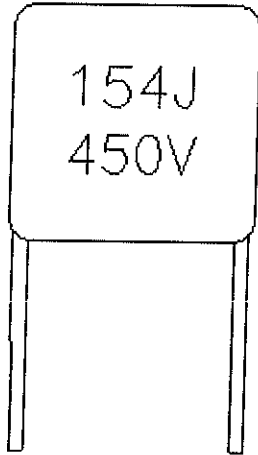

154	CAPACITANCE
J	CAPACITANCE TOLERANCE
450V	DC RATED VOLTAGE

②P ≥ 10mm

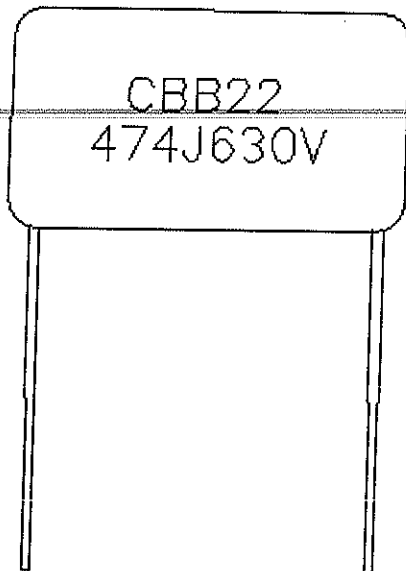

CBB22	CAPACITANCE MPDEL
474	CAPACITANCE
J	CAPACITANCE TOLERANCE
630V	DC RATED VOLTAGE