


Mechanical Specifications

D	3.0 ± 0.3mm
T	3.0 ± 0.3 mm
Lead Diameter	0.5 mm Nom
S	2.80 mm Nom
L	38.0 mm Max
Straight Leads	Standard
Max lead run down on coating	2.7mm Max

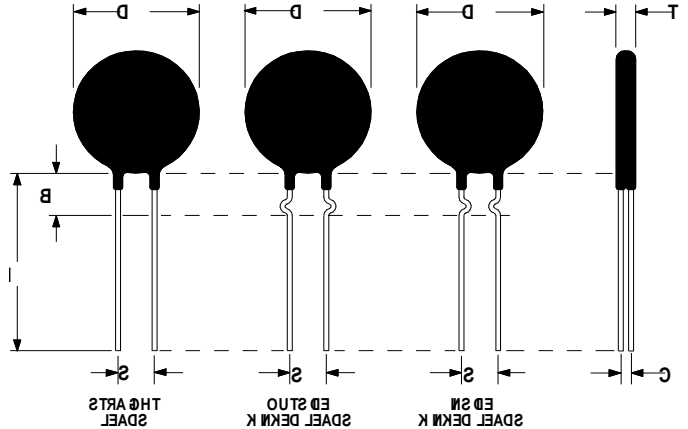

Electrical Specifications

R@25°C	10.0K Ω ± 1%
R@0°C / R@50°C	9.2 ± 0.75%
R@25°C / R@125°C	28.3 ± 1%
Beta	3965 ± 1.75%
Temp Coefficient of Resistance @ 25°C	-4.43%/°c
Operating Temperature Range	-50°C/180°C
Thermal Time Constant	≤ 10 seconds

Resistance Temperature Curve

Temperature	R@T / R@25°C
-50	66.97
-45	47.25
-40	33.74
-35	24.37
-30	17.80
-25	13.13
-20	9.776
-15	7.348
-10	5.570
-5	4.257
0	3.279
5	2.550
10	1.998
15	1.576

Ametherm, Inc
3111 N. Deer Run Road Bldg. 4
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 702 884-2434
www.Ametherm.com



DATA SHEET
P/N: NT03 10391-F

RESISTANCE TEMPERATURE CURVE CONT.

20	1.252
25	1.000
30	0.8038
35	0.6499
40	0.5282
45	0.4316
50	0.3545
55	0.2949
60	0.2465
65	0.2070
70	0.1747
75	0.1481
80	0.1261
85	0.1077
90	0.09243
95	0.07961
100	0.06881
105	0.05977
110	0.05210
115	0.04560
120	0.04005
125	0.03529
130	0.03119
135	0.02766
140	0.02460
145	0.02194
150	0.01963