

Features

- Precision metal film
- Superior electrical, TCR performances
- Flame-retardant coatings are standard
- Panasert available (selected sizes; contact factory)
- RNM (mini) an ideal choice where size constraints apply
- RN 5% replaces MP series
- RoHS compliant / lead-free available (RNF/RNMF)
- Lower or higher resistance values may be possible; contact factory




Electrical Specifications

Type / Code	Mil Ref	Power Rating (W) @ 70°C	Max Working Voltage*	Max Pulse Voltage	Resistance Temperature Coefficient	Ohmic Range and Tolerance				
						0.1%	0.25%	0.5%	1%	5%
RN 1/8	RN50	0.125W	200V	400V	±25 ppm/°C ±50 ppm/°C ±100 ppm/°C	100Ω – 100K 100Ω – 100K 100Ω – 100K	100Ω – 100K 100Ω – 100K 100Ω – 100K	49.9Ω – 499K 10Ω – 1M 10Ω – 1M	49.9Ω – 499K 1.0Ω – 1M 0.1Ω – 4.9M	– – 1Ω – 2.2M
RN 1/4	RN55	0.250W	250V	500V	±10 ppm/°C ±25 ppm/°C ±50 ppm/°C ±100 ppm/°C	100Ω – 100K 1.0Ω – 2.2M 1.0Ω – 2.2M 1.0Ω – 2.2M	– 1.0Ω – 2.2M 1.0Ω – 2.2M 1.0Ω – 2.2M	– 1.0Ω – 2.2M 1.0Ω – 2.2M 1.0Ω – 2.2M	– 10Ω – 1M 1.0Ω – 1M 0.1Ω – 1M	– – – 1Ω – 10M
RN 1/2	RN60	0.500W	350V	700V	±25 ppm/°C ±50 ppm/°C ±100 ppm/°C	100Ω – 100K 100Ω – 100K 100Ω – 100K	100Ω – 100K 100Ω – 100K 100Ω – 100K	49.9Ω – 499K 10Ω – 1M 10Ω – 1M	49.9Ω – 499K 10Ω – 1M 0.1Ω – 5.1M	– – 1Ω – 10M
RN 1	RN65	1.000W	350V	700V	±25 ppm/°C ±50 ppm/°C ±100 ppm/°C	– –	– –	100Ω – 51K 10Ω – 100K 100Ω – 51K	10Ω – 100K 10Ω – 1M 1.0Ω – 1M	– – –
RNM 1/4	–	0.250W	200V	400V	±25 ppm/°C ±50 ppm/°C ±100 ppm/°C	100Ω – 100K 100Ω – 100K 100Ω – 100K	100Ω – 100K 100Ω – 100K 100Ω – 100K	49.9Ω – 499K 10Ω – 1M 10Ω – 1M	49.9Ω – 499K 1.0Ω – 1M 0.1Ω – 1M	– – 1Ω – 1M
RNM 1/2	RL07	0.500W	350V	600V	±25 ppm/°C ±50 ppm/°C ±100 ppm/°C	100Ω – 294K 49.9Ω – 1M 49.9Ω – 1M	100Ω – 294K 49.9Ω – 1M 49.9Ω – 1M	49.9Ω – 1M 10Ω – 1M 10Ω – 1M	49.9Ω – 1M 1.0Ω – 1M 0.1Ω – 1M	– – 1Ω – 1M

* Lesser of \sqrt{PR} or maximum working voltage.

How to Order

RN		1/4	T1	4.75K	1%	R			
SEI Type		Code	TCR	Nominal Resistance	Tolerance	Packaging			
Type	Description	Code	TCR	Tolerance	Values	SEI Types	Pkg Qty	Description	Code
RN	EIA standard	1/8	T1 = 100ppm	0.1%	E96	1/8, 1/4, RNM 1/2	5,000	Reel	R
RNM	Mini	1/4	T2 = 50ppm	0.25%	E96	RN 1/2, 1	2,500	Ammo	T
RNF	Standard RoHS	1/2	T9 = 25ppm	0.5%	E96	1/8, 1/4, RNM 1/2	5,000		
RNMF	Mini RoHS	1	TB = 10ppm	1%	E96, E24	1/2	2,000		
PRN	Panasert			5%	E24	1	1,000	Bulk	A
PRNF	Pana - RoHS					1/8, 1/4, 1/2	1,000		

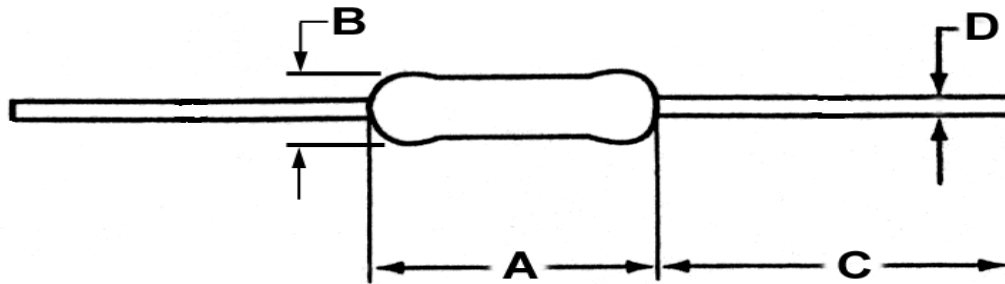

Mechanical Specifications					
Type / Code	A Body Length	B Body Diameter	C Lead Length (Bulk)	D Lead Diameter	Units
RN 1/8	0.13 ± 0.010	0.069 ± 0.010	1.10 ± 0.08	0.017 ± 0.003	inches
	3.20 ± 0.20	1.75 ± 0.25	28.0 ± 2.0	0.44 ± 0.07	mm
RN 1/4	0.25 ± 0.026	0.093 ± 0.010	1.10 ± 0.08	0.022 ± 0.004	inches
	6.35 ± 0.65	2.35 ± 0.25	28.0 ± 2.0	0.56 ± 0.09	mm
RN 1/2	0.34 ± 0.030	0.128 ± 0.030	1.10 ± 0.12	0.026 ± 0.004	inches
	8.75 ± 0.75	3.25 ± 0.75	28.0 ± 3.0	0.65 ± 0.10	mm
RN 1	0.433 ± 0.04	0.177 ± 0.02	1.18 ± 0.12	0.030 ± 0.002	inches
	11.00 ± 1.00	4.50 ± 0.50	30 ± 3.0	0.75 ± 0.05	mm
RNM 1/4	0.13 ± 0.010	0.070 ± 0.003	1.10 ± 0.08	0.017 ± 0.001	inches
	3.20 ± 0.20	1.78 ± 0.08	28.0 ± 2.0	0.44 ± 0.02	mm
RNM 1/2	0.25 ± 0.026	0.093 ± 0.010	1.10 ± 0.08	0.022 ± 0.002	inches
	6.35 ± 0.65	2.35 ± 0.25	28.0 ± 2.0	0.56 ± 0.04	mm

Performance Characteristics		
Test	Standard / Method	Requirement
Biased Humidity	MIL-STD 202, Method 103	± 1.5%
Resistance to Solder Heat	MIL-STD 202, Method 210	± 0.5%
Insulation Resistance	JIS C 5202 5.6	± 0.5%
Load Life	MIL-STD 202, Method 208	± 1.0%
Terminal Strength	MIL-STD 202, Method 211	± 0.2%
Temperature Cycling	JESD22 Method JA-104	± 1.0%
Moisture Resistance	MIL-STD 202, Method 106	± 0.5%

Operating Temperature Range : -55°C to +155°C