




FEMALE END VIEW



SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	POLYURETHANE/BLUE-GREY
CONTACT MATERIAL/PLATING	GOLD-PLATED BRASS W/SPRING BUSHING
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	300 V
TEMPERATURE RATING	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6,13 AND IEC IP67

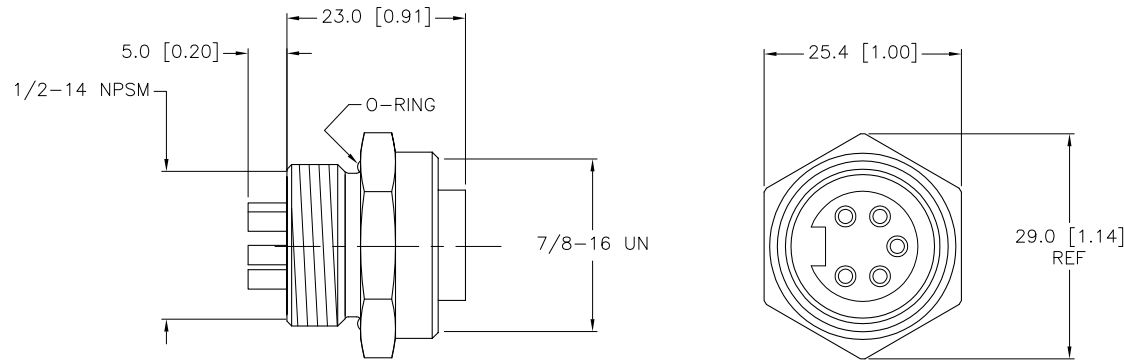

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.			ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	CBM	DATE	04/12/00
2.				DSGN		SCALE	1=1.0
3.		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]	IDENTIFICATION NO.		REV	
4.				U5514-1		D	
MATERIAL		DO NOT SCALE THIS DRAWING		FILE: U5514-1		SHEET 1 OF 1	
FINISH							

D	ROTATE KEYWAY TO FLAT PER ECO	TR	06/03/09	26566
REV	DESCRIPTION	BY	DATE	ECO NO.