SPECIFICATIONS

Impedance: 50Ω
Frequency Range: 0~12GHz
Working Voltage: 335V Max
Withstand Voltage: 1000V rms
VSWR: ≤1.25+0.002f
Temperature Range: -65°C to +250°C
Durability: 500 cycles Min

MATERIAL:

Body: Brass, Gold flash
Central Pin: Brass, gold 1u"
Insulator: Teflon, white, RoHS

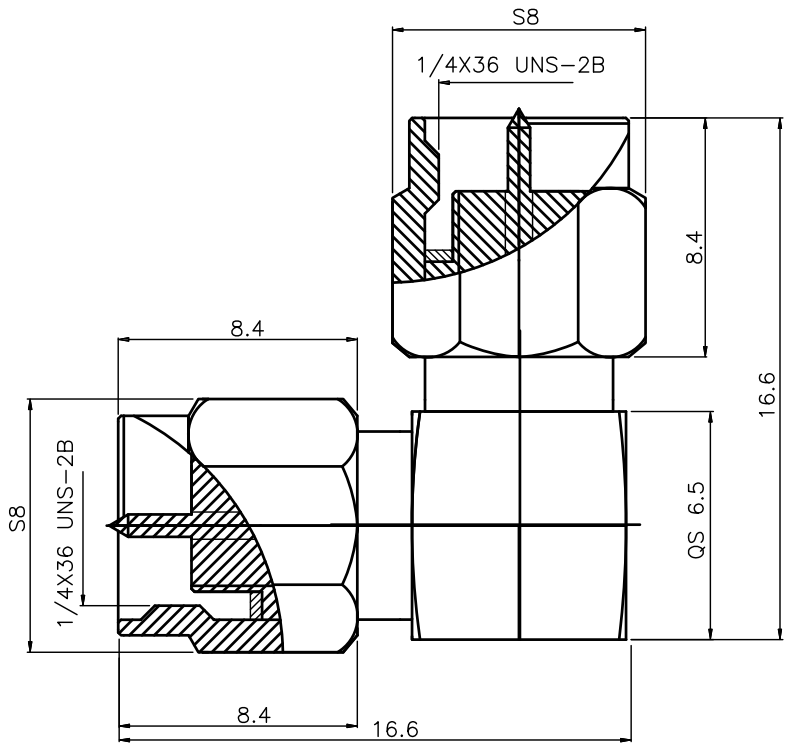

Morecrafts Technology
TEL: +886-2-2966-1326
FAX: +886-2-2966-1352
www.morecrafts.com.tw

PART NO.	SMAA-7650	DRAWN	Andrew
DRAWING NO.	SMAA-7650	CHECKED	Claudia
DATE	2020/03/11	APPROVED	Brian

TITLE:	REV.	TOLERANCE	SCALE	UNIT	NO.	DESCRIPTION	DATE
SMA PLUG TO SMA PLUG ADAPTOR 50Ω	A0	.X ±0.25 .XX ±0.20	1:1	mm			