

Product information STASEI 3 N grau/grey

Industrial Connecting Solutions: Rectangular Connectors: Power Connectors (ST series): Panel-mounted connector: STASEI 3 N grau/grey http://www.e-catalog.beldensolutions.com/link/57078-24228-256261-24351-24356-36011/en/conf/uistate STASEI 3 N grau/grey Name Panel-mounted connector with added gasket **Delivery informations** Availability available **Product description** Panel-mounted connector with added gasket Description STASEI 3 N grau/grey Type Order No. 932 145-106 Type of contact male 3 + PE Number of contacts Conductor size max. 1.5 mm² **Housing Color** grey Contact bearer color black Technical data Pin dimensions 2 mm AC 400 V / DC 250 V Rated voltage Rated current DC 10 A / AC 16 A Contact resistance <= 5 m0hm Type of termination screws Mounting Schrauben Material Contact material Cu Zn Contact surface material Sn PA Contact bearer material Housing material PA **Environmental conditions** Protection class (IEC 60529) IP 54 Pollution severity Temperature range -30 °C to +90 °C Inflammability class Housing UL 94 HB



Scope of delivery and accessories
Accessories to order separately

Contact bearer
Approvals
UL

Packing unit
Packaging unit

VDE

SEV

UL 94 V-0

UL

VDE

SEV

100 pieces


safety brackets STASI 3, order no. 732 045-001



Industrial Connecting Solutions:Rectangular Connectors:Power Connectors (ST series):Panel-mounted connector:STASEI 3 N grau/grey http://www.e-catalog.beldensolutions.com/link/57078-24228-256261-24351-24356-36011/en/conf/uistate

Picture

Drawing

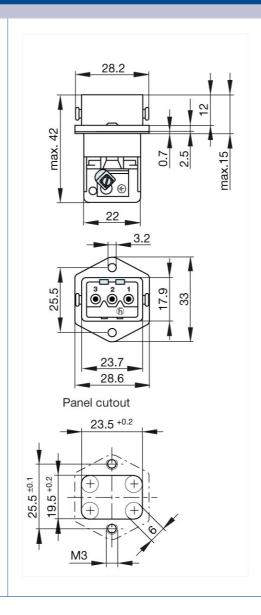

Belden Deutschland GmbH

Im Gewerbepark 2 58579 Schalksmühle Germany

Phone: +49 7127/14-1806 E-Mail: icos-sales@belden.com





The information published in the websites has been compiled as carefully as possible. It is subject to alteration without notice in technical as well as in price-related/commercial respect. The complete information and data were available on user documentation. Mandatory information can only be obtained by a concrete query.

