


NOTES:

Current Rating:15AMP
 Voltage Rating:300V
 Contact Resistance:20milliohm Max
 Withstand Voltage:AC2000V
 Insulation Resistance:5000Megohm Min
 Operation Temperature:-40℃ to +105℃
 Wire Range:28-12AWG 1.5mm
 Strip length:7-8mm
 Torque:0.4N.m3.6lb.in

Screws:M2.5 Stainless Steel
 Housing Material:PA66(UL94V-0)
 Contact Material :Phosphor bronze,
 Tin plated

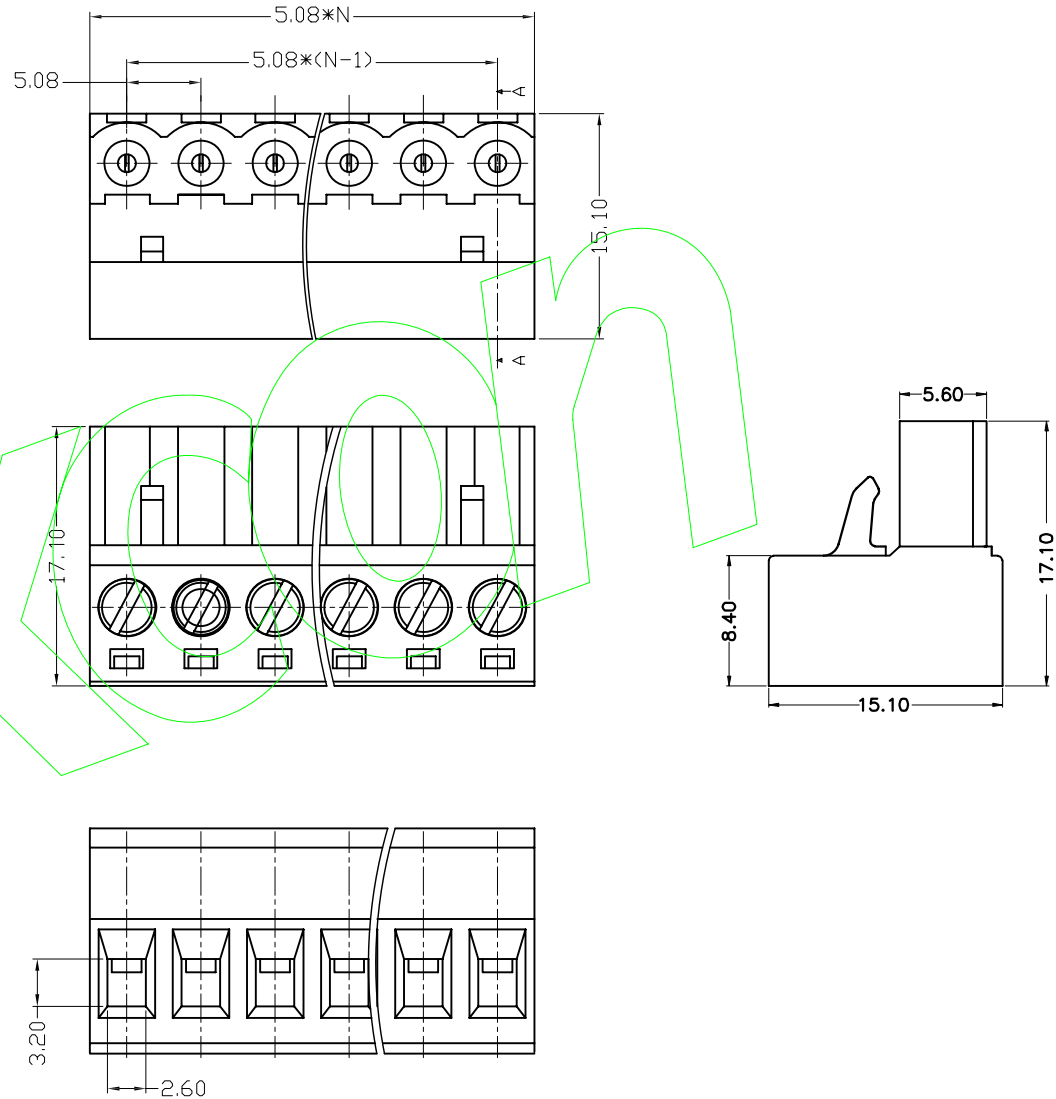

PART NUMBER CODING

TB02 F 508-02 SN G 22

Pitch 508=5.08
 No. of Pins SN=Tin
 Contact Plating Colour G=Green

				OPERATION		SCALE		Fit		东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co.,Ltd.	
				X.X	±0.30	UNIT		MM			
				X.XX	±0.25	SIZE	A4	DESIGN	杨哲	PART NO.	TB02F508-02SNG22
				X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	5.08MM PITCH XXP, 插座式端子台, 母座, 无耳, 一字型螺钉, 带卡扣, PA66绿色, 磷青铜, 镀锡
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	Angle	±3°	PROJ.	APPROVE		Customer No.	
					DIM	TOL					