




△ SPECIFICATION

Current Rating:2 Amp
 Dielectric Withstand Voltage:1000V AC/Minute
 Contact Resistance:30 Milliohms Max.
 At DC 100mA
 Insulation Resistance:1000 Megaohms Min.
 At DC 500V
 Operation Temperature:-55°C~+125°C
 Housing:PBT+G.F.(UL94V-0)
 Contact:Phosphor Bronze,Tin Plated Over Nickel
 RoHS Compliant

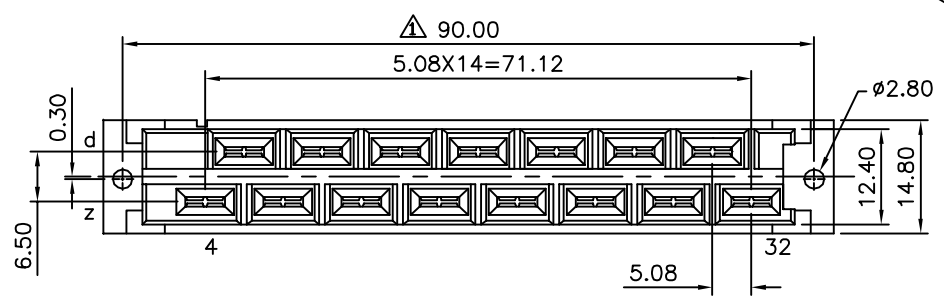

△ UH 15 SD - H
 (1) (2) (3) (4)

- (1) UH:5.08mm DIN41612
- (2) 15:H15 Type
- (3) SD:Female DIP Straight
- (4) H:RoHS Compliant

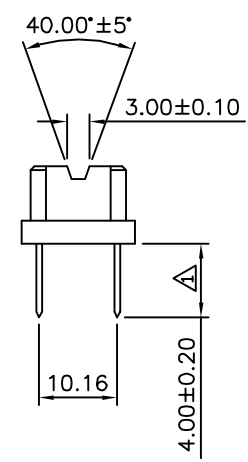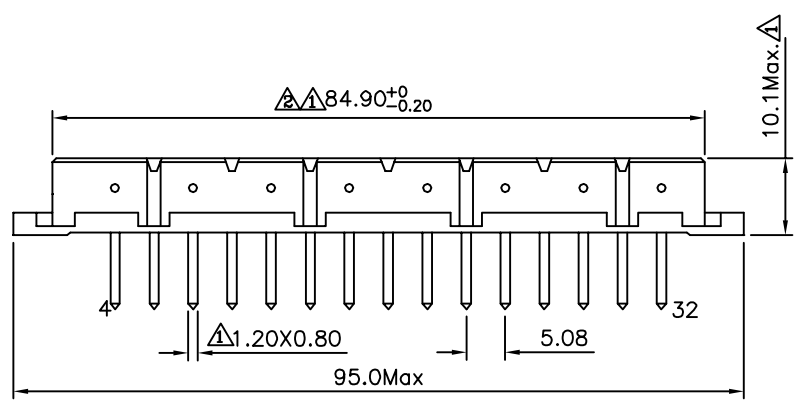

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.5 .X ±0.25 .XX ±0.15
PART No. UH15SD-H		EMILY		
DRAWING No. UH15SD-H		CHECKED BY HZF		
SCALE NONE		DRAWING BY SAN		
REV.	A2	UNIT mm		

NO.	REV.	REVISIONS	CHK	DATE
△ A2		Modify Data	HZF	03/19/2014
△ A1		Modify Data	HZF	02/17/2009
△ A0		NEW RELEASE		