
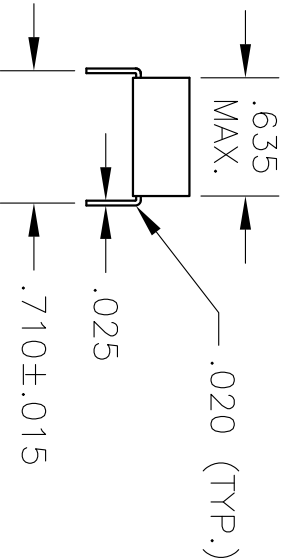
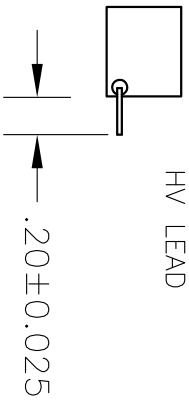
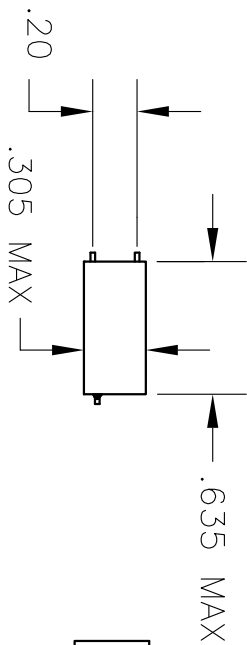
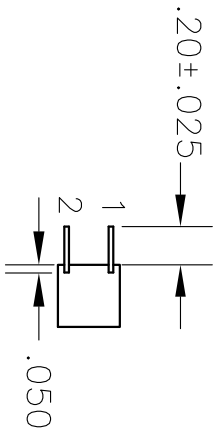


CONFIDENTIAL

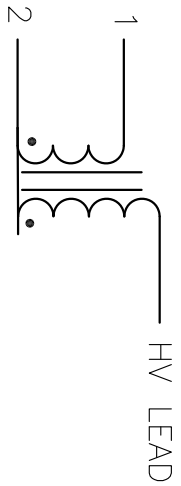

SPECIFICATIONS		BY
MAX INPUT VOLTAGE	300 V	
OUTPUT VOLTAGE	11 KV	
MAX INPUT ENERGY	10 MJ	
PRIMARY INDUCTANCE	15 ± 5 UH	
SECONDARY INDUCTANCE	30 ± 10 MH	
TURNS RATIO	47:1	
PINS 1, 2	.025 SOLID TINNED	
HV LEAD	.025 SOLID TINNED	
WEIGHT	.10 OZ	
OPERATING TEMPERATURE	-65 TO 170°C	
DATE		

NO.	REVISION
C	
B	
A	

THIRD ANGLE

TOLERANCES UNLESS OTHERWISE SPECIFIED
 ANGLES ±0° 15"
 DECIMALS
 125 / 3 PLACES ±.005 (.127mm)
 2 PLACES ±.010 (.254mm)
 1 PLACE ±0.1 (2.54mm)

Critically Prevention Limit:
 Special Designation symbol for
 Critical Dimensions specified
 within the drawing. When more
 than one dimension is specified
 the symbol will be followed by
 a NUMBER.

REMOVE ALL BURRS
 BREAK ALL SHARP EDGES
 ALL DIMENSIONS IN INCHES AND MILLIMETERS.
 DO NOT SCALE CONSTRUCTION

ANGLO KEMILITE LABORATORIES, INC.
HALOGEN LAMP DIVISION
 8787 ENTERPRISE BLVD.
 PHONE (727) 812-2000
 LARGO, FLORIDA 33773
 FAX (727) 812-2001

MATERIAL	N/A	PART NO.	VE-11-5	DESCRIPTION	TRIGGER
DWN. BY	KEVIN MOODY	DATE	9/24/99	PROJECT NO.	VE-11-5
APPVLS.		DATE		SCALE: 1:1	PAGE: 1

REV A
 REV C