

FEATURES:

- Ideal for mounting fans to chassis or finger guards to fans
- Hardened screws form threads in mild steel, aluminum and hard plastics
- Reduced-diameter point aligns multiple surfaces to be fastened
- Choices of screw thread, length, head style, aluminum and hard plastics
- Material and finish compliant with European Union Restriction of Hazardous Substances (RoHS) Directive 2002/95/EC.

MATERIALS AND FINISH:

- Heat treated carbon steel with attractive bright nickel finish.
- Other materials and/or finishes available upon request





PART DESCRIPTION EXAMPLE:

M 3.9 x 12 MM PH - FL - FAN - STL - NI

THREAD CODE LENGTH CODE DRIVE CODE HEAD CODE MATERIAL FINISH

Drive Code	Description	
	PH	Cross Recess
	TX	6 - Lobe Recess

Head Code	Description
FL	Flat Head
TRUSS	Truss Head

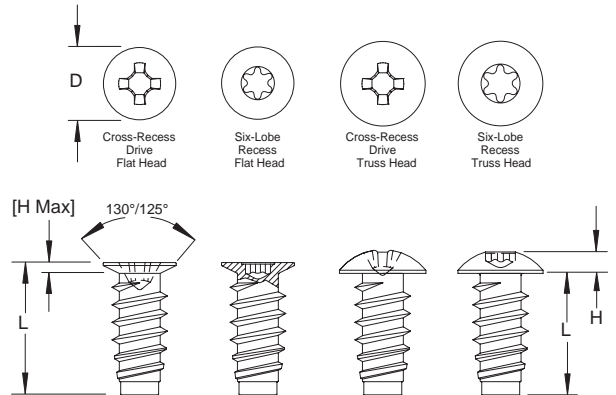

DIMENSIONS:

Thread Size (Type B)	Thread Code	F Hole Dia.	Length Code	L Length	Hole Type								
					Flat Head				Truss Head				
					D Head Dia.	H Head Height Max. (REF)	Drive		D Head Dia.	H Head Height Max. (REF)	Drive		
							Cross Recess	Six - Lobe Recess			Cross Recess	Six - Lobe Recess	
Size	Size	Size	Size	T Min.									
M3.9 x 1.2	M3.9	3.34	10.5	10.7 / 10.3	5.56 / 5.35	1.12	2	T8	7.10 / 6.80	1.5	2	T15	0.95
			12	12.5 / 11.5	5.56 / 5.35	1.12	2	T8	7.10 / 6.80	1.5	2	T15	0.95
M4.2 x 1.4	M4.2	3.50	10.5	10.7 / 10.3	6.10 / 5.80	1.12	2	T8	7.40 / 7.10	1.7	2	T15	1.05
			12	12.5 / 11.5	6.10 / 5.80	1.12	2	T8	7.40 / 7.10	1.7	2	T15	1.05
M4.9 x 1.6	M4.9	4.20	10.5	10.7 / 10.3	6.65 / 6.35	1.18	2	T10	8.10 / 7.80	2.0	2	T20	1.27
			12	12.5 / 11.5	6.65 / 6.35	1.18	2	T10	8.10 / 7.80	2.0	2	T20	1.27

All dimensions in metric. Custom sizes available.

Optimum hole size may vary depending on material joined. Pencom recommends testing in the specific application to determine actual hole size and tightening requirements. Contact an account representative for samples.