

Plastic Film Capacitors

Part Number System



Main Series	Sub-Series	Voltage	Code	Capacitance	Code	Tol.	Code	Pitch	Code	Lead Length	Code	Packing	Code
JFA	0	50V	1H	10pF	100	±1%	F	Axial	000	Standard.	000	Ammo	A
JFB	0	63V	1J	100pF	101	±2%	G	3.5	035	Cut Lead Length		Bulk	B
JFC	0	100V	2A	1000pF	102	±3%	E	4.0	040				
JFD	0	160V	2C	0.01uF	103	±5%	J	4.5	045	Long Lead Length		Tape & Reel	R
JFE	0	200V	2D	0.1uF	104	±10%	K	5.0	050				
JFF	0	250V	2E	1uF	105			6.0	060				
JFG	A	300V	2L	10uF	106			7.0	070				
	B	360V	2N					8.0	080				
	C	400V	2G					8.5	085				
	D	630V	2J					9.0	090				
JFH	0	700V	2M					9.5	095				
JFJ	0	900V	1X					10.0	100				
	1	1,000V	3A					10.5	105				
JFL	0	1,250V	3B					11.0	110				
JFM	0	1,600V	3C					11.5	115				
JFN	0	2,000V	3D					12.0	120				
JFO	0	3,000V	3F					12.5	125				
JFP	0	150VAC	D0					13.0	130				
JFQ	0	250VAC	A3					15.0	150				
JFQ	D	275VAC	A1					15.5	155				
JFR	A	300VAC	A2					20.0	200				
	R	305VAC	A8					20.5	205				
JFS	Refer spec.	310VAC	A9					21.0	210				
		320VAC	K2					22.5	225				
JFT	0	330VAC	R1					26.5	265				
JFV	0	400VAC	A4					27.5	275				
JFW	0	440VAC	A5										
JFZ	0	450VAC	A6										
		480VAC	A7										
		500VAC	H2										
		630VAC	J2										

Radial & Axial Aluminum Electrolytic Capacitors

Part Number System

Series	Voltage	Capacitance	Tol	Pitch	Dimension	Lead Length	Packing	Special Require
J R A	1 E	1 0 1	M	0 2 5	0 3 5 0 0 3 0 0	0 0 0	B	

jb Series	Voltage	Code	Cap(μF)	Code	Tolerance (%)	Code	Dimension	Code	Packing	Code	For JRB only	Code
JRA	6.3	0J	0.1	0R1			5x11	00500110	Ammo	A		
JRB	10	1A	0.22	R22	+10-10	K	6.3x11	00630110	Bulk	B		
JRC	16	1C	0.33	R33	+15-15	L	12.5x25	01250250				
JRD	20	1D	0.47	R47	+20-20	M	16x25	01600250				
JRG	25	1E	1	010	+100-0	P						
JRK	35	1V	2.2	2R2	+30-10	Q						
	40	1G	3.3	3R3	+20-0	R						
	50	1H	4.7	4R7	+50-10	T						
	63	1J	10	100	+75-10	U						
	80	1K	22	220	+20-10	V						
	100	2A	33	330	+20-5	H						
	120	2B	47	470	+30-0	F						
	160	2C	100	101								
	180	2K	220	221								
	200	2D	270	271								
	250	2E	330	331								
	315	2F	390	391								
	330	2U	470	471								
	350	2V	560	561								
	400	2G	680	681								
	420	2X	1000	102								
	450	2W	2200	222								
	500	2H	3300	332								
	550	2Y	4700	472								
			10000	103								
			22000	223								

Pitch	Code
Axial	000
2.0	020
2.5	025
3.5	035
5.0	050
7.5	075

Lead Length	Code
Standard.	000
4.0	040
4.5	045
5.0	050

For JRB only	Code
Higher Ripple Current	HR

Large Can Aluminum Electrolytic Capacitors

Part Number System

Series			Voltage		Capacitance			Tol	Pitch/Pins			Dimension						Special Require					
J	N	C	2	V	4	7	1	M	1	0	0	0	3	5	0	0	3	0	0				
<i>jb</i> Series	Voltage	Code	Cap(μF)	Code	Tolerance (%)	Code	Snap-in	Code	Dimension	Code	Special Require	Code											
JNC	6.3	0J	0.1	0R1	+10-10	K	4 Pins	VAT	12.5x25	01250250													
JNE	10	1A	0.22	R22	+15-15	L			35x30	03500300													
JNG	16	1C	0.33	R33	+20-20	M	For 2 Pins Snap-in, Screw, Lug Type		90x236	09002360													
JNJ	20	1D	0.47	R47	+100-0	P	Pitch	Code	101x237	10102370													
JNK	25	1E	1	010	+30-10	Q	10.0	100															
JMJ	35	1V	2.2	2R2	+20-0	R	12.7	127															
JML	40	1G	3.3	3R3	+50-10	T	20.0	200															
JMN	50	1H	4.7	4R7	+75-10	U	22.0	220															
JMQ	63	1J	10	100	+20-10	V	28.6	286															
JSS	80	1K	22	220	+20-5	H	32.0	320															
JSU	100	2A	33	330	+30-0	F																	
JSW	120	2B	47	470			For JSW Series																
	160	2C	100	101			Pitch	Code															
	180	2K	220	221			Standard	000															
	200	2D	270	271																			
	250	2E	330	331																			
	315	2F	390	391																			
	330	2U	470	471																			
	350	2V	560	561																			
	400	2G	680	681																			
	420	2X	1000	102																			
	450	2W	2200	222																			
	500	2H	3300	332																			
	550	2Y	4700	472																			
			10000	103																			
			22000	223																			

SMD / SMD Polymer - Aluminum Electrolytic Capacitors

Part Number System

Series			Voltage		Capacitance			Tol.	Case Size					
J	C	S	1	C	2	2	0	M	0	5	0	0	5	4
<i>jb</i> Series			Voltage	Code	Cap(μ F)	Code		Tolerance (%)	Code		Case Size	Code		
JCS			4	0G	0.1	0R1		$\pm 10\%$	K		4x5.4	040054		
JCK			6.3	0J	0.22	R22		$\pm 20\%$	M		6.3x5.4	063054		
JCC			10	1A	1	010		+30-10	Q		8x10.5	080105		
JCD			16	1C	2.2	2R2		+50-10	T		10x10.5	100105		
JCE			25	1E	10	100					12.5x13.5	125135		
JCL			35	1V	22	220								
JCN			50	1H	100	101								
JCZ			63	1J	220	221								
JCP			80	1K	1000	102								
			100	2A	2200	222								
					10000	103								

Ceramic Capacitors

Part Number System


Series Voltage Capacitance Tol. Pitch Material/Temp. Char. Size Lead Length Packing



jb Series	For JYA & JYC		Capacitance	Code	Tol.	Code	For JYA & JYC		For JYA & JYC		Lead Length	Code
	Voltage	Code	10pF	100	±5%	J	Temp. Char.	Code	Diameter	Code	Standard	000
JYA	1,000V	3A	15pF	150	±10%	K	Y5P	B	6.0mm	060	Cut Lead Length	
JYC	2,000V	3D	47pF	470	±20%	M	Y5U	E	6.5mm	065	3.5	035
JYM	3,000V	3F	100pF	101	+80-20%	Z	Y5V	F	7.0mm	070	4.0	040
	4,000V	3G	1000pF	102			UJ	J	7.5mm	075	4.5	045
	5,000V	3H	0.01uF	103			SL	S	8.0mm	080	5.0	050
	6,000V	3I					Y5T	T	8.5mm	085	6.0	060
	10KV	4A					YL	Y	9.5mm	095		
	15KV	4C					N750	7	10.0mm	100		
	250VAC	A3					For JYM		10.5mm	105		
	300VAC	A2					Material	Code	11.0mm	110		
	400VAC	A4					NPO	N	11.5mm	115		
	For JYM						X7R	X	12.0mm	120		
	Voltage	Code					Y5V	F		
	25V	1E					For JYM Radial		Size	Code		
	50V	1H							0805	010		
100V	2A							1206	020			
								1210	030			
								1812	040			
								2225	050			
								3035	060			
								For JYM Axial				
								Size	Code			
								15	015			
								16	016			
								17	017			
								19	019			
								20	020			


Tantalum Capacitors

Part Number System

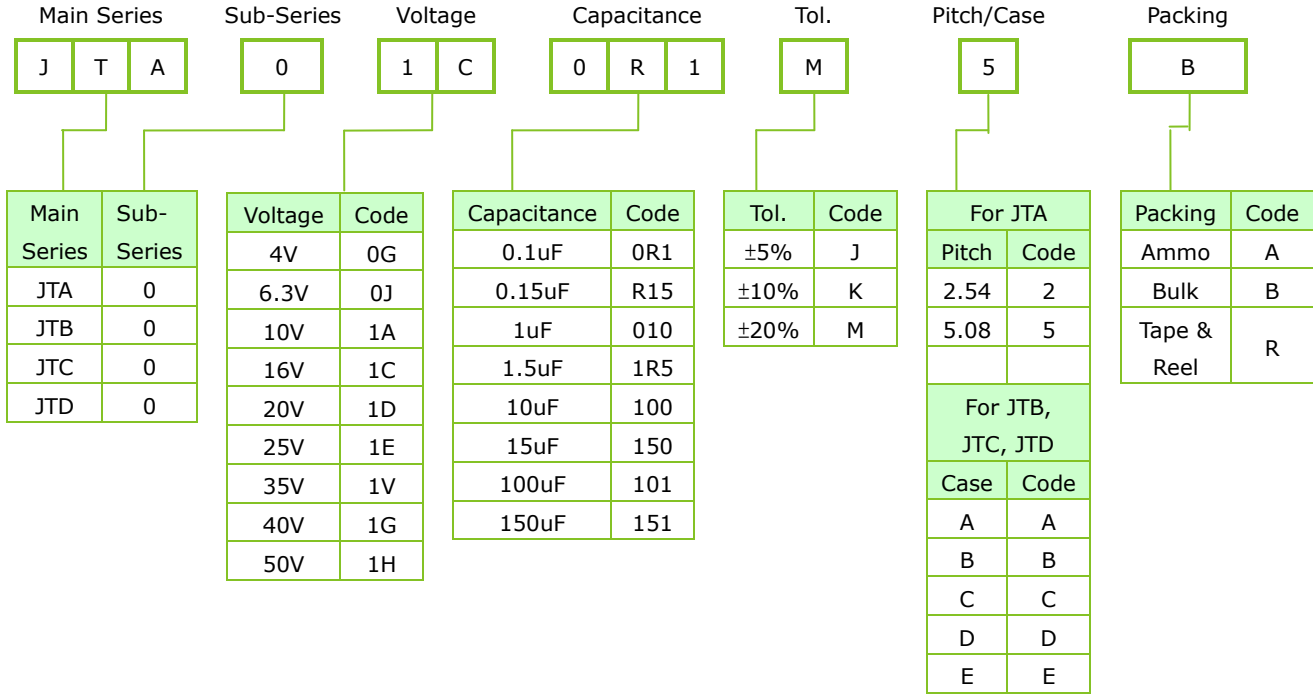

Radial Polymer Aluminum Solid Electrolytic Capacitor

Part Number System

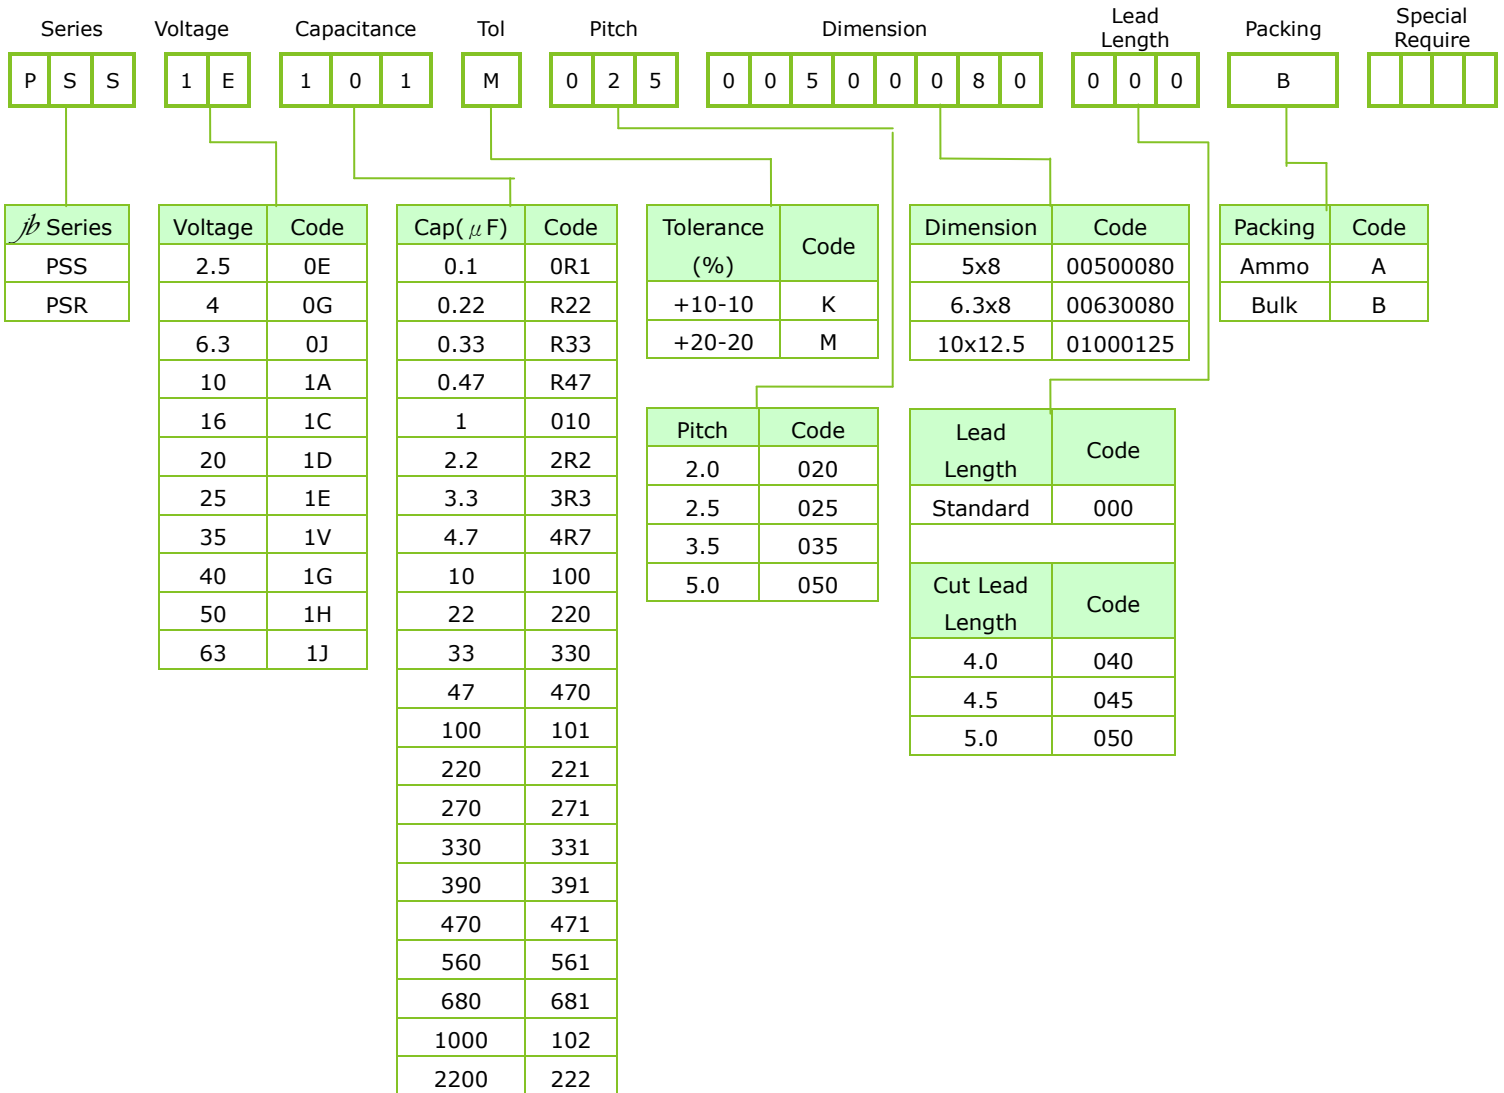

Super Capacitors

Part Number System

