



USB CABLE

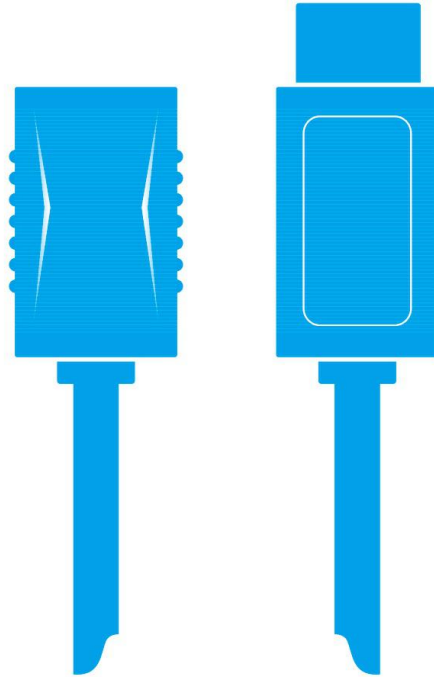

- Built-in USB Chipset. prevent data loss.
- With double ring and Braid.
- USB gold-plated connectors.

USB CABLE

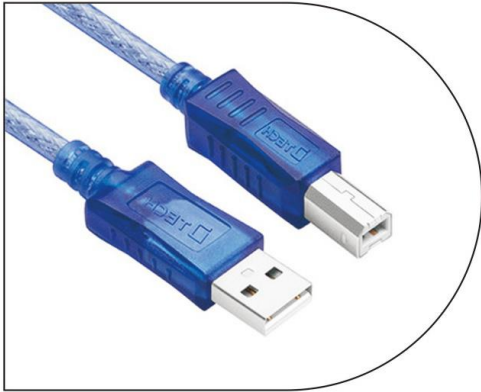

USB 2.0 AM-BM Cable

Model:CU0093

- Standard USB2.0 AM,BM,interface.
- Multilayer interface shielding,high-speed escort.
- The maximum transmission can reach 480M bps,compatible with USB1.1.

Model	Length
CU0093	1.8M
CU0094	3M
CU0097	5M
CU0114	10M



USB 2.0 AM-AF Cable

Model:CU0065

- Standard USB2.0 AM,AF,interface.
- Multilayer interface shielding,high-speed escort.
- The maximum transmission can reach 480M bps,compatible with USB1.1.

Model	Length
CU0065	1.8M
CU0035	3M
CU0107	5M
CU0113	10M

USB CABLE



USB 2.0 Extension Cable(active)

Model:DT-5026A

- Built-in USB chipset can enhance the signal, amplify the signal cable, to prevent data loss.
- 28AWG+24AWG tinned copper twisted pair core, data security, communication and stability.
- Double circular, enhance signal.
- Plug&play, no driver.
- With 5V/1A power supply length.

Model	Length
DT-5026A	8M
DT-5026	10M
DT-5026B	10M
DT-5027	15M
DT-5028	20M
DT-5029	25M
DT-5030	30M




USB 2.0 Extension Cable

Model:DT-5037

- Built-in USB chipset can enhance the signal, amplify the signal cable, to prevent data loss.
- 28AWG+24AWG tinned copper twisted pair core, data security, communication and stability.
- Double circular, enhance signal.
- Plug&play, no driver.

Model	Length
DT-5037	10M
DT-5038	15M
DT-5039	20M
DT-5042	25M
DT-5043	30M

USB CONVERTER CABLE

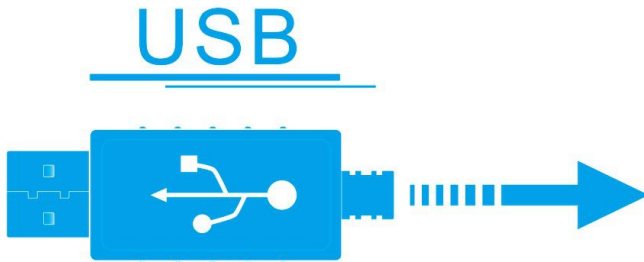

RS232

DB9 Serial

Parallel Cable

DB25

IEEE1284


CN36

Fast Ethernet

RS485/422

Printing cable


USB CONVERTER CABLE

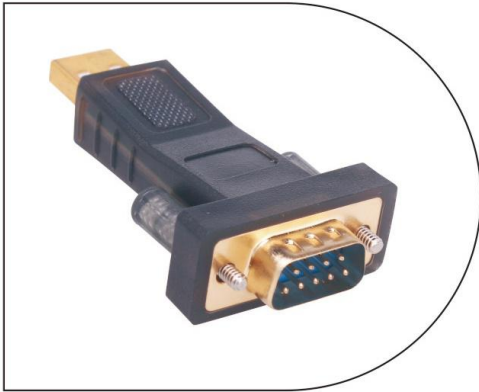

USB to Serial DB9 Converter

Model:DT-5001A


- Supports RS232 serial interface.
- Supports over 1Mbps data transfer rate.
- Suitable for PDA and modem.
- Support system:WIN98/98SE/ME/XP/
- VISTA/WIN7/8/10.

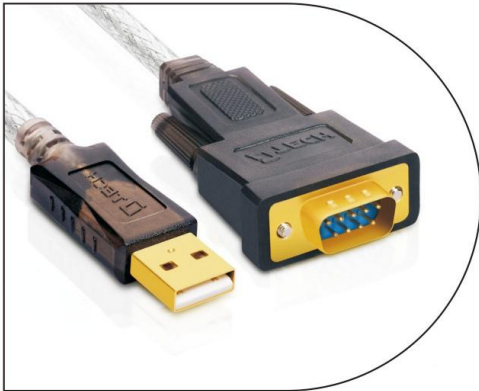

USB to Serial DB9 Converter Cable

Model:DT-5002A

- USB specification 2.0 compliant DB9 male adapter.
- Supports RS232 serial interface.
- Supports over 1Mbps data transfer rate.
- Suitable for PDA and modem.
- Length: 1.8M.

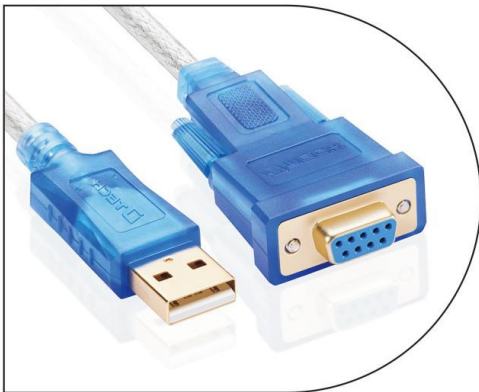

USB2.0 to female serial DB9 Cable

Model:DT-5002B

- USB specification 2.0 compliant. DB9 female adapter.
- Supports RS232 serial interface.
- Supports over 1Mbps data transfer rate.
- Suitable for PDA and modem.
- Length: 1.8M.

USB CONVERTER CABLE



USB to DB9 RS232 Cable with OTG

Model:DT-5002C


- USB specification 2.0 compliant.DB9 male adapter with OTG.
- Supports RS232 serial interface DB9.
- Supports over 1Mbps data transfer rate.
- Suitable for PDA and modem.
- Length: 1.8M.



USB to DB9 and DB25 Converter Cable

Model:DT-5003A

- USB 1.1 and 2.0 compatible.
- IC Solution: Prolific PL 2303.
- Easily Convert a standard USB Port into a DB9 Serial Port.
- Compatible With:Windows 98/ME/2000/XP/Vista/7/8/10, MAC OSX 8.6~9.x,MAC OSX 10.1.x~10.3.x,Linux.

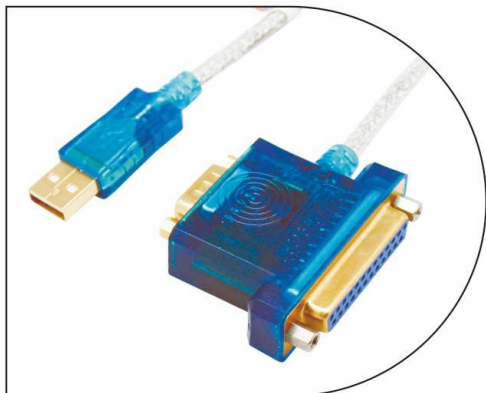


USB to Parallel and serial Cable

Model:DT-5006

- USB 1.1 and USB 2.0 compatible.
- Supports RS232 serial interface DB9 and DB 25 parallel.
- Supports over 1Mbps data transfer rate.
- Supports remote wake-up and power management.
- Length: 1.8m.

USB CONVERTER CABLE

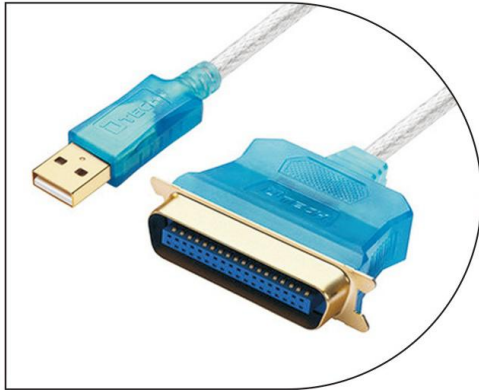


USB to Parallel IEEE 1284 (Printer Cable)

Model:DT-5004

- Fully compliant with USB1.0 specification.
- Perfect for the latest Inkjet and Laser Printers.
- Auto-negotiates hardware recognition for faster protocol set-up and supports multiple logical channels.
- Plug & Play Capability.
- Conserves parallel ports for use with scanners, printers, video cameras.
- OS Supports: Windows 98SE, ME, 2000, XP,vista, 7,8,10or MAC OS 8.6 or Greater.

Model	Length
DT-5004	1.8M
DT-5034	3M
DT-5054	5M

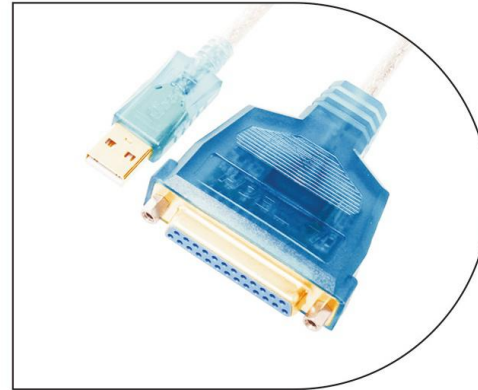


USB 2.0 Extension Cable

Model:DT-5005

- Support most of major brand printers.
- Up to 12Mbps data transfer rate.
- Bi-directional data transfer over usb to ieee1284 allows high speed printing.
- Fully compliant with USB1.1 and IEEE 1284 specifications.

Model	Length
DT-5005	1.8M
DT-5035	3M
DT-5055	5M


USB CONVERTER CABLE

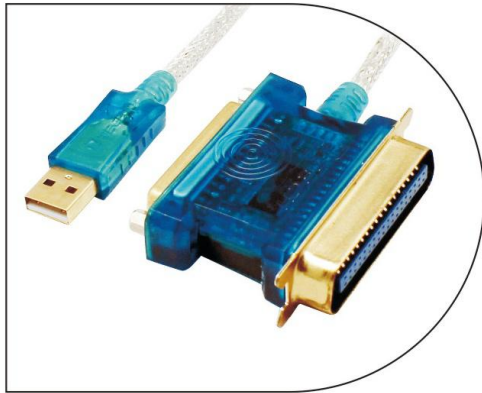

USB to CN 36 and DB25 Parallel Cable

Model:DT-5008


- USB 1.1 and USB 2.0 compatible.
- Support USB to CN36 and DB25 port.
- Support system: Windows98/98SE/ME/2000/XP/VISTA/WIN7 system or higher.

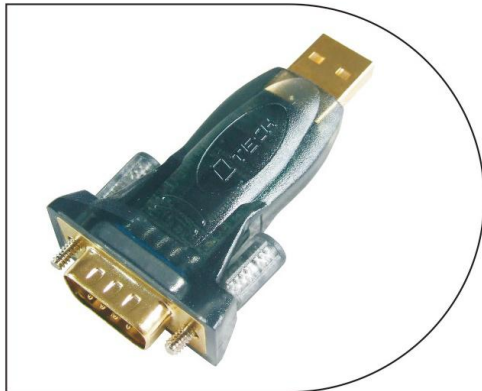

Fully compatible serial port adapter

Model:DT-5010

- With FTDI chipset.
- Converts USB 2.0 port to RS232 9 Pin Serial port.
- Standard USB 2.0 type A Male and RS232 serial 9 pin male interface.USB specification 2.0 compliant.
- Support Win98, 2000, XP, Vista,7,8,10 & Mac OS V8.6 or higher.

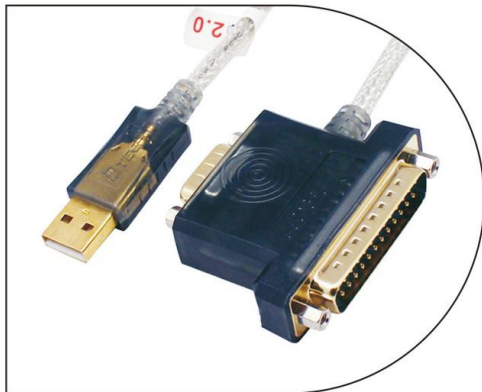

USB2.0 to RS232 DB9 and DB25 Cable

Model:DT-5018

- Compatible with the USB 1.1&USB 2.0 interface.
- Supports the data transfer rate up to 1Mbps.
- Supports Wake-On-LAN function.
- Supports Windows 98/SE/ME/2000/XP/7/8 and MAC OS9.0/OSX/Linux.
- Ideal for connecting to RS232 devices, label printers, mobile phones.


USB CONVERTER CABLE



USB2.0 60M Extender

Model:DT-5015

- Compliant with USB 1.1 specification.
- Extends a USB device from a USB-enabled computer up to 60m.
- Self-powered for low power needed device such as USB cameras, printers, webcams, keyboard/mouse ect.
- Uses standard Cat5/Cat5E/Cat6 patch cord(not included).

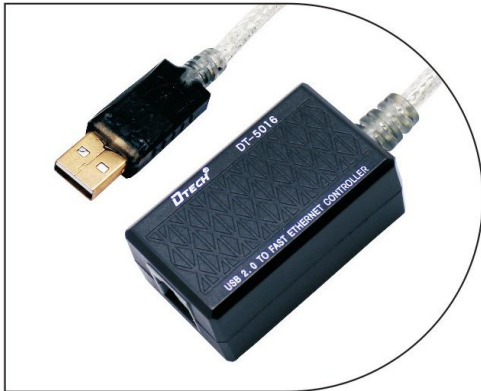

USB2.0 to Fast Ethernet Controller

Model:DT-5016

- USB2.0 to RJ45 Ethernet Network LAN Cable Adapter 10/1000Mbps for Apple Mac Book, Lenovo, ThinkPad, Dell, Sony, Samsung, Acer, Asus etc brand laptop, Tablet PC which without RJ45 interface.
- Interface: USB 2.0 to computer side , RJ45 to network cable.
- Powered by USB port, no external power adapter required.
- Self-adapting 10Mbps or 1000Mbps network adapter.



USB2.0 to 5M Extension Cable

Model:DT-5017

- Built-in USB cable core can enhance the signal, amplify the signal cable, to prevent data loss.
- External power supply can power equipment adequate, stable data transmission.
- With LED light to check the connection.

USB CONVERTER CABLE



USB2.0 to RS422/485 Cable

Model:DT-5019

- Fully compliant with USB1.0 specification.
- Plug & Play Capability.
- Conserves parallel ports for use with scanners, printers, video cameras.
- OS Supports: Windows 98SE, ME, 2000, XP,vista, 7,8 or Mac OS 8.6 or Greater.

Model	Length
DT-5119	0.5M
DT-5019	1.2M
DT-5219	2M
DT-5319	3M
DT-5519	5M



Fully compatible DB9 serial port cable 1.2M (FTDI)

Model:DT-5011

- With FTDI chipset.
- Converts USB 2.0 port to RS232 9 Pin Serial port.
- Standard USB 2.0 type A Male and RS232 serial 9 pin male interface.USB specification 2.0 compliant.
- Support Win98, 2000, XP, Vista,7,8,10 & Mac OS V8.6 or higher.

Model	Length
DT-5011	1.2M
DT-5031	3M
DT-5051	5M

USB CONVERTER CABLE



Fully compatible Female DB9 serial port Cable 1.2M (FTDI)

Model:DT-5031B

- With FTDI chipset
- Standard USB2.0 type A Male, and female Rs232 serial 9 pin port.
- Support WIN98,2000,XP,Vista,7,8,10&MAC OS V8.6 or higher.




USB2.0 to dual serial Cable

Model:DT-5024

- Converting a USB Connection to up to 2 DB9 Serial connection.
- Plug & Play Capability.
- Support WIN98/ME/2000/XP/7/8,Linux,Mac os.

USB HUB

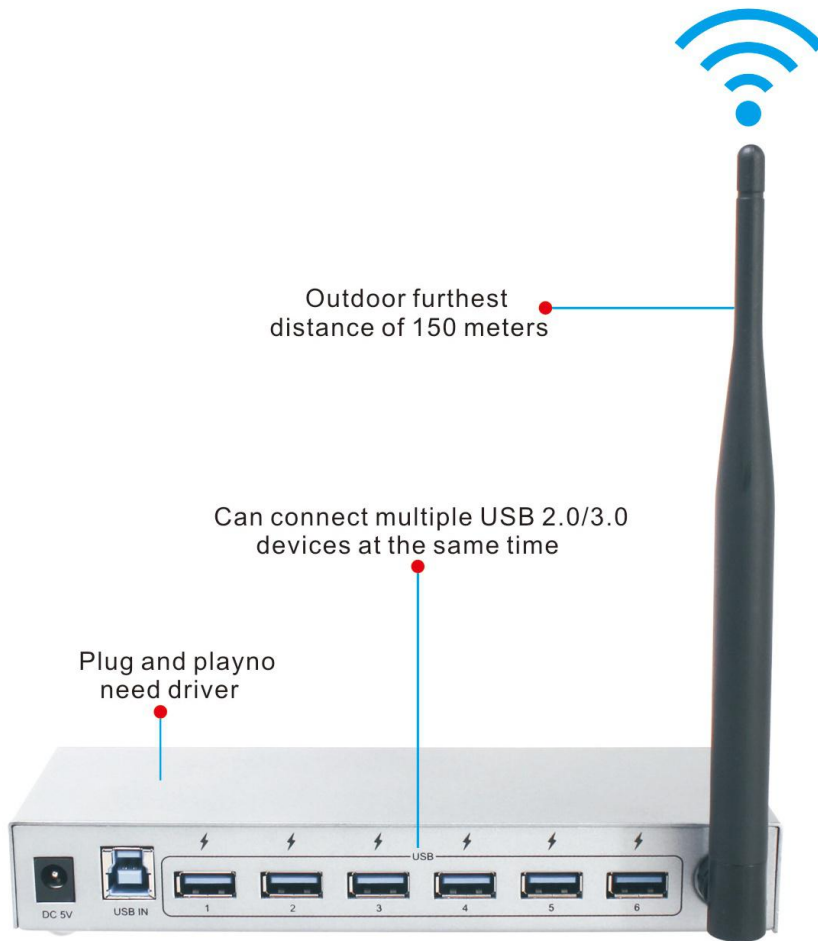

USB HUB



USB2.0 Industrial-grade 7-port HUB+BC1.2

Model:DT-3207

- Industrial-grade 7-port USB 2.0 HUB and with BC1.2 agreement.
- Supports 127 kinds of USB 2.0 devices, rate is 480Mbps, backward compatible with 1.1.
- Supports high-speed, full-speed and low-speed devices.
- Plug and Play, no driver, can be connected to seven USB 2.0 devices simultaneously.



USB2.0 Industrial-grade HUB/WiFi+BC1.2

Model:DT-3207 WF

- Be equipped with a power supply equipped with two charging port, accord with BC1.2 agreement.
- Connect USB 2.0 high-power devices, such as: high power adapter, mobile hard disk. Etc with power supply.
- In accordance with the IEEE 802.11n, IEEE 802.11g, IEEE 802.11b standard.



USB3.0 Industrial-grade 7-port HUB

Model:DT-3307

- Industrial-grade 7 ports USB 3.0 HUB.
- Connect up your printer, digicam, card reader, mp3 player, U-Flash-Driver, 3G MODEM USB ports products etc.
- Charge up 20pcs Cell Phone or others electronic products at the same time time, and provide about 600 mA charging current for each USB port.
- Fully compliant with USB1.1&USB 2.0.

USB HUB



USB 3.0 Industrial-grade 7-PORT HUB with WIFI

Model:DT-3307 WF

- Be equipped with a power supply equipped with two charging port, accord with BC1.2 agreement.
- Connect up your printer, digicam, card reader, mp3 player, U-Flash-Driver, 3G MODEM etc.
- Fully compliant with USB1.1&USB 2.0.
- Transmission distance, indoor as far as 50 meters; As far as 150 metres outdoor (environmental factors have an effect on distance).



USB3.0 4-port HUB

Model:DT-8009

- Expand one USB3.0 to four USB3.0 port.
- Supports 127 kinds of USB 2.0 devices, rate is 480Mbps, backward compatible with 1.1&2.0.
- Every USB3.0 port have independent switch, mutual non-interference.

82



USB3.0 4-port HUB

Model:DT-3308

Length	
0.25M	1.2M

- Expand one USB port to multiple independent USB ports.
- No need external power adapter, no need driver, support plug and play and hot plug.
- Built in power overload short circuit protection device.
- Full compatible with Windows/Linux/Mac systems.



www.dtechelectronics.com

DTECH[®]

Guangzhou dtech electronics technology Co.,Ltd
ADD:NO.488 Qinghong Road,Hongqi Industrial park
Zhongluotan Town,Baiyun District,Guangzhou,China
TEL:+86-20-62107222
Fax:+86-20-85534513
Web:www.dtechelectronics.com
E-mail:export@dtechelectronics.com