


GENERAL PURPOSE, HI-K (DIELECTRIC CONSTANT Class ii/iii) TYPE

FEATURES



- WIDE SELECTION OF TEMPERATURE CHARACTERISTICS
- HIGH INSULATION RESISTANCE
- EXCELLENT HIGH FREQUENCY CHARACTERISTICS
- ECONOMICALLY PRICED
- AVAILABLE WITH FORMED LEADS AND ON TAPE FOR AUTOMATIC INSERTION

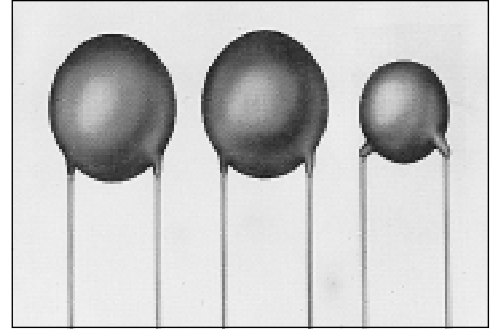

SPECIFICATIONS

Temperature Characteristics	Y5F	Y5P	Z5U	Z5V	
Operating Temperature Range	-30° ~ +85°C	-30° ~ +85°C	+10° ~ +85°C	+10° ~ +85°C	
Capacitance Range	100pF~.01μF	100pF~.022μF	.001μF~.1μF	.001μF~.1μF	
Standard Tolerance	K= ±10%	K= ±10%	M= ±20%	Z= -20%~+80%	
Capacitance Change Over Temperature Range	±7.5%	±10%	-56%	+22% -82%	
Dissipation Factor	2.5%*	2.5%*	5%	5%	
Insulation Resistance	Minimum 10,000 Megohms				
Working Voltage Range	50 ~ 3KVdc				
Dielectric Withstanding Voltage	2.5 Times Rated Voltage For Not Less Than 1 Second				
Load Life Test 85°C 1000 Hrs	Cap. Change	±10%	±10%	±20%	±30%
	D.F. (MAX.)	4%	4%	7.5%	7.5%
	I.R. (Min)	1,000 Megohms			
Test Conditions	1Khz; 1.0V ±0.2Vrms		1Khz; 0.5V ±0.1Vrms		

* Special low dissipation factor (1.0% max.) Y5F and Y5P dielectrics are also available. Contact NIC for availability.

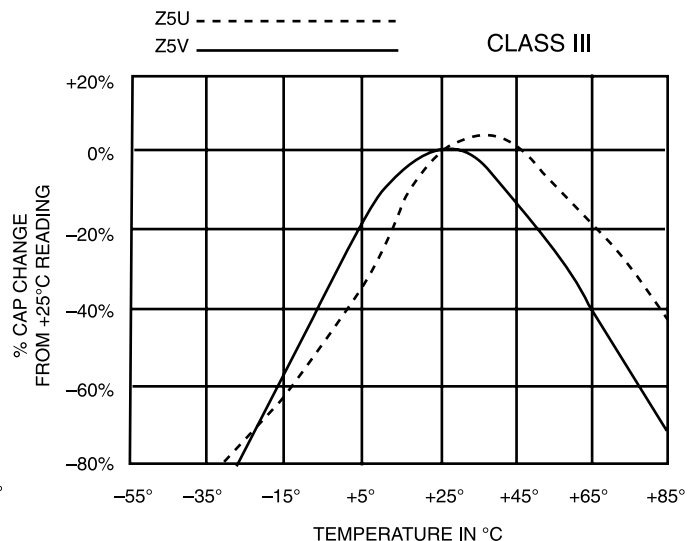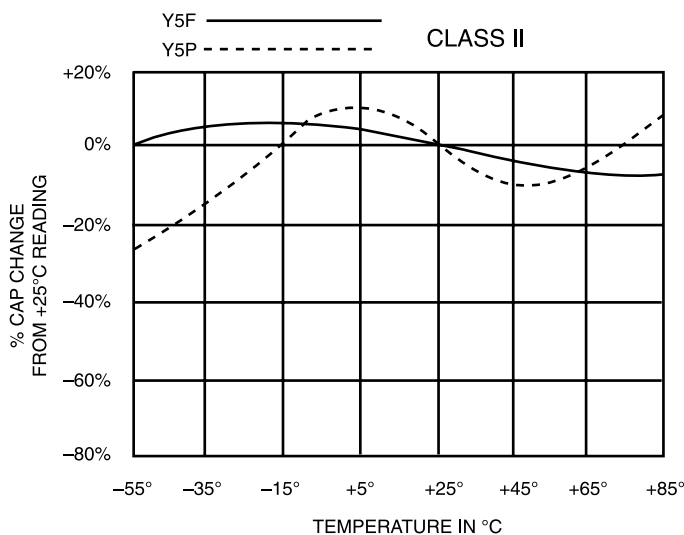

Ceramic Disc Capacitors


NCD Series Class II/III

LEADED

Lead Spacing (mm) - S				
Body Diameter	Standard Bulk	Standard T & R	Optional Bulk	Optional T & R
5 ~ 11	6.35 ±0.8	5.0 ±0.8	5.0 ±0.8	2.5 ±0.8
≥ 12	6.35 ±0.8	5.0 ±0.8	7.5 ±0.8	7.5 ±0.8
			10.0 ±0.8	10.0 ±0.8


LEAD DIAMETER
0.6MM IS STANDARD

BODY THICKNESS
2 ~ 4MM DEPENDENT ON CV


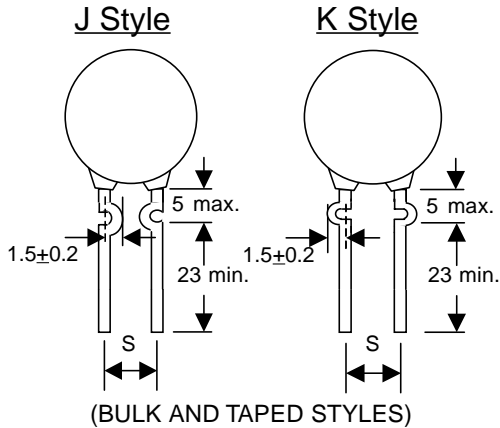


DIMENSIONS (mm)


STANDARD
(500Vdc up)

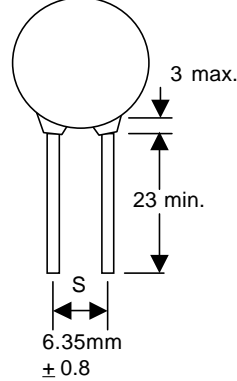

LOW VOLTAGE
(100Vdc and below)

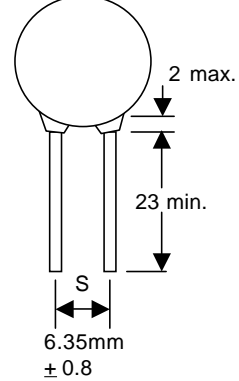

D Style (BULK ONLY)



E Style

STANDARD PRODUCTS AND MAXIMUM DIAMETER (mm) BY T.C. AND VOLTAGE

Cap. (pF/μF)	Y5F/Y5P*			Z5U			Z5V		
	50VDC/ 100VDC	500VDC	1KVDC	50VDC/ 100VDC	500VDC	1KVDC	50VDC/ 100VDC	500VDC	1KVDC
100 ~ 470pF	6	6	6						
560	6	6	6						
680	6	6	7						
750	6	6	7						
820	6	6	7						
.001μF	6	7	7	6	6	6		6	6
.0015	6	8	8	6	6	7		6	6
.0022	6	9	10	6	7	7	6	6	6
.0027	7	10	12	6	7	8	6	6	7
.0033	7	10	14	6	7	9	6	7	8
.0047	8	12	14	6	8	10	6	8	8
.0056	9	14	16	6	9	10	6	8	9
.0068	9	14	16	7	9	12	6	8	10
.0082	10	16	18	7	10	12	6	9	10
.01	12	16	20	7	10	12	6	9	10
.015	14	21		9	14	16	7	10	12
.022				10	16	18	8	14	16
.033				8	18	22	7	16	18
.047				8	21	24	7	16	21
.068				8/9	24		8	16	
.1				8/9	26		8/9	17	

*.0047μF AND ABOVE NOT AVAILABLE IN Y5F, PLEASE USE Y5P.
NIC RESERVES THE RIGHT TO REQUEST MINIMUM QUANTITIES ON CERTAIN VALUES.

