

Axial Lead Fuse

2.4*7 series

3.6*10 series

4.5*15 series

5.2*20 series

6.35 * 32 series

Low Voltage Fuse

Radial Lead Fuse

2.4*7 series

**Description:**

20T,Slow Blow Micro Fuse

Security Certificate:

CCC/CQC/UR(CUR)/CSA/TUV/PSE

Application:

Circuit Protection for Smal-size Power,Plasma TV,LCD TV and so on.

Standard:UL 248-1 , UL 248-14**Working Temperature:**

-55°C~125°C

Storage Temperature:

-55°C~85°C

Resistance Welding of Antipyretic:

260°C,10s Max

Solderability:

245°C±5°C , 5s±0.5s

SMD Fuse




New Energy applicated Fus...

Thermal Fuse


PPTC

Fuse Accessories

20T 平均 I-T 曲线图 (仅供参考)

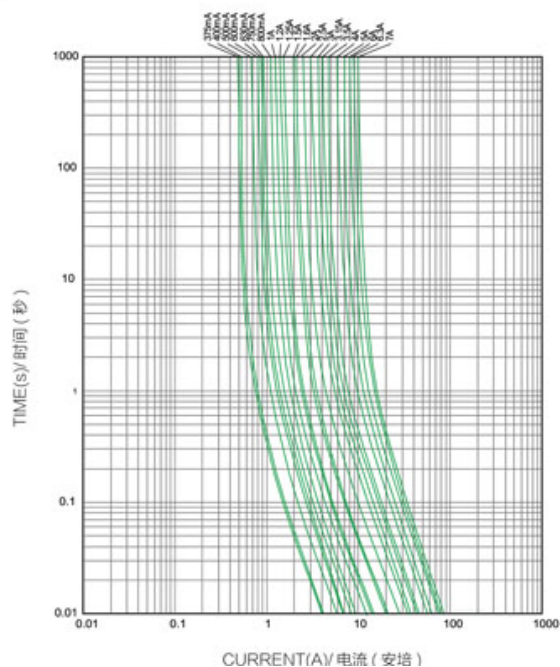

Dimensions/ 尺寸 :

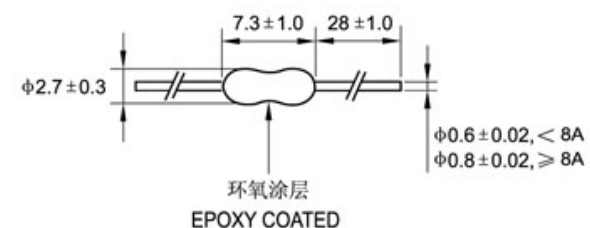

Download



For more detailed information, please click on the contact me Division Sales Engineer

[Request for Sample](#)

[Orders](#)

20T

Φ2.4x7mm, RoHS Compliant & Pb-Free**MICROFUSE (SLOW-BLOW)****INTERRUPTING CAPACITY :**

30 amperes at 125V AC (100mA-7A)

30 amperes at 250V AC (100mA-7A)

100 amperes at 125V AC (1A-5A) PSE

TECHNICAL PARAMETERS :

CATALOG NO.	CURRENT RATING	SAFETY APPROVALS									REFERENCE (A ² .Sec.) (RoHS) I ² T		
		CCC		CQC		UR (cUR)		CSA		TÜV		PSE	
		H	H	H	L	H	L	H	L	H		L	
20T-0375H/L	375mA			•	•	•	•					0.1614	
20T-0400H/L	400mA			•	•	•	•					0.1713	
20T-0500H/L	500mA	•		•	•	•	•	•	•			0.3374	
20T-0600H/L	600mA			•	•	•	•	•	•			0.4662	
20T-0630H/L	630mA	•		•	•	•	•	•	•			0.4890	
20T-0750H/L	750mA			•	•	•	•	•	•			0.7074	
20T-0800H/L	800mA	•		•	•	•	•	•	•			0.8908	
20T-010H/L	1A	•		•	•	•	•	•	•	•		1.916	
20T-012H/L	1.2A			•	•	•	•	•	•	•		2.061	
20T-013H/L	1.25A	•		•	•	•	•	•	•	•		2.139	
20T-015H/L	1.5A			•	•	•	•	•	•	•		3.982	
20T-016H/L	1.6A	•		•	•	•	•	•	•	•		4.191	

20T-020H/L	2A	•		•	•	•	•	•	•	•	7.803
20T-025H/L	2.5A	•		•	•	•	•	•	•	•	11.95
20T-030H/L	3A			•	•	•	•			•	14.11
20T-032H/L	3.15A	•		•	•	•	•			•	18.62
20T-035H/L	3.5A			•	•	•	•			•	20.89
20T-040H/L	4A	•		•	•	•	•			•	31.89
20T-050H/L	5A		•	•	•	•	•			•	39.51
20T-060H/L	6A			•	•	•	•				65.06
20T-063H/L	6.3A		•	•	•	•	•				68.31
20T-070H/L	7A			•	•	•	•				72.91

• DENOTES FOR APPROVED

H DENOTES FOR 250V

L DENOTES FOR 125V

ELECTRICAL CHARACTERISTICS :

% of CURRENT RATING	BLOWING TIME
100%	4 hours Min.
200%	1-60 seconds
300%	0.2-3 seconds
800%	0.02-0.1 second

About us

About Hollyland
 Public Affairs
 Company Milestones
 Quality & Technology
 Company Concept
 EHS Policy
 Awards

Product

Axial Lead Fuse
 Low Voltage Fuse
 Radial Lead Fuse
 SMD Fuse
 New Energy applicated Fus...
 Thermal Fuse
 PPTC
 Fuse Accessories

Application Industries

New Energy Vehicle Solution
 Photovoltaic Inverter Solution
 Wind Power Solution

News & Events

Company News
 Industry News

Technical Service

Technical Consultation
 Technical Information
 Contact us

Careers

Hollyland Family
 Photo Show
 Career Information

Investor Relations

Investor Relations



Hollyland Code



Public Code



Copyright © 2015 好利来（中国）电子科技股份有限公司 粤CP备0626232号

[Legal Statement](#) | [Links](#) | [Contact Us](#) | [站长统计](#)



Designed by Wanhu