SPECIFICATION

Current Rating: 1.5 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -55°C to +85°C

MATERIAL

Insulator: Nylon 66, UL 94V-0
Contact Pin: Copper Alloy

ORDER INFORMATION

B

5	7	D	V	D	S	X	F	-	2	4	N	X	X	X	W	A	-	0	4

- X: 1:Tin shell + L(RoHS); 2:Nickel shell + L (RoHS)
- 24: No. of Contacts
- N: A:Thread Insert #4-40; B:Thread Insert #4-40 +Jack Screw #4-40 Attached; C:Thread Insert #4-40 +Jack Screw #4-40 Removable
- XX: S0:Selective Au; SA:Selective Au 5u"; SF:Selective Au 15u"; SD:Selective Au 30u"; S3:Selective Au 3u"
- W: W:White
- A: A:Tray
- 04

certified Pb RoHS Compliant

AMTEK糧德
2019.01.17
Released DCC



57DVDSXF-24NAXXWA-04
Thread Insert #4-40



57DVDSXF-24NBXXWA-04
Thread Insert #4-40
+ Jack Screw #4-40 Attached



57DVDSXF-24NCXXWA-04
Thread Insert #4-40
+ Jack Screw #4-40 Removable

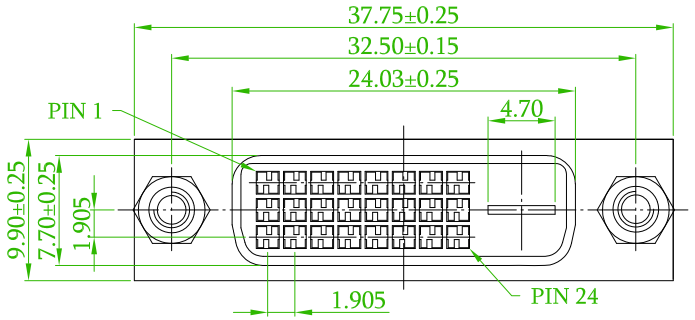



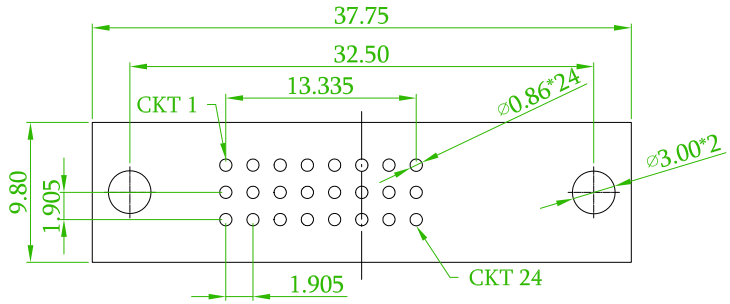

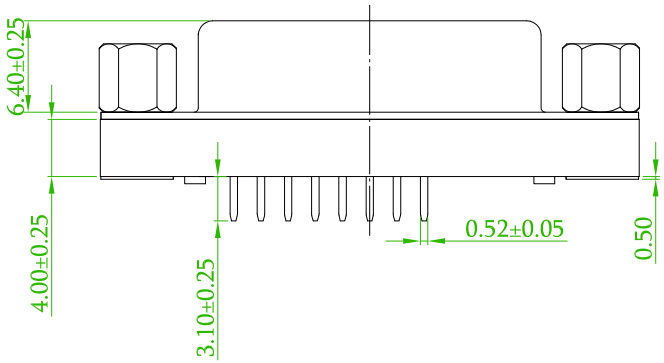



REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B x2	ECN NO.: 181107, revise the p/n: 57DVDSXF-24AXXXWA-01 -> 57DVDSXF-24NXXXWA-04.	Gary	2018/12/25

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	DVI 24+0 V/T DIP TYPE					頁數 Page	1/1
品號 PART NO.	B 57DVDSXF-24NXXXWA-04				繪圖 DRAWN	Gary 2017/04/10	
圖號 DRAWING NO.	GN010-GA351	版本 REV.	B		核對 CHECKED	Josh 2018/12/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None		承認 APPROVED	Jason 2018/12/25	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	.X°±3	單位 UNIT	mm	THIRD ANGLE PROJECTION		