




PROPRIETARY INFORMATION
 INFORMATION ON THIS DOCUMENT IS A TRADE SECRET, PROPRIETARY, AND SHALL NOT BE USED OR REPRODUCED IN WHOLE OR IN PART WITHOUT WRITTEN AUTHORIZATION OF SPS TECHNOLOGIES

DRAWING NUMBER
SPS-B-96677
 ISSUE DATE
 8/31/04
 REVISION
 (1)
 7/12/07

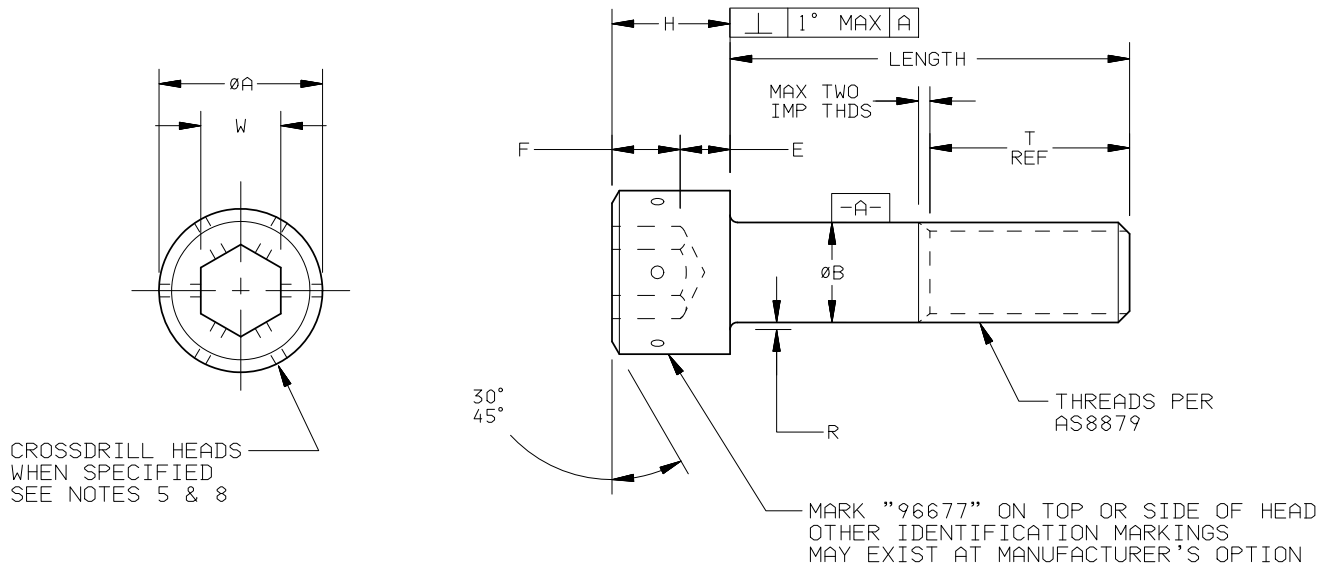

DASH NUMBER	THREADS CLASS 3A	ØA	ØB	E MIN	F MIN	H	R FILLET EXT	T REF	W NOM	TENSILE LBS. MIN (1)
256	.086-56 UNJC	.140	.086	.029	.038	.086	.008	.625	.0781	590
264	.086-64 UNJF	.134	.0822			.083	.004			630
348	.099-48 UNJC	.161	.099	.034	.044	.099	.008	.625	.0781	780
356	.099-56 UNJF	.154	.0949			.095	.004			840
440	.112-40 UNJC	.183	.112	.038	.051	.112	.009	.750	.0937	970
448	.112-48 UNJF	.176	.1075			.108	.005			1,060
540	.125-40 UNJC	.205	.125	.043	.057	.125	.010	.750	.0937	1,270
544	.125-44 UNJF	.198	.1202			.121	.006			1,330
632	.138-32 UNJC	.226	.138	.047	.064	.138	.010	.750	.1093	1,450
640	.138-40 UNJF	.218	.1329			.134	.006			1,620
832	.164-32 UNJC	.270	.164	.056	.077	.164	.012	.875	.1406	2,240
836	.164-36 UNJF	.262	.1585			.159	.007			2,360
1024	.190-24 UNJC	.312	.190	.065	.090	.190	.014	.875	.1562	2,800
1032	.190-32 UNJF	.303	.184			.185	.009			3,200
420	.250-20 UNJC	.375	.250	.095	.120	.250	.014	1.000	.1875	5,090
428	.250-28 UNJF	.365	.2435			.244	.009			5,820
518	.312-18 UNJC	.469	.3125	.119	.151	.312	.017	1.125	.2500	8,380
524	.312-24 UNJF	.457	.3053			.306	.012			9,280
616	.375-16 UNJC	.562	.375	.143	.182	.375	.020	1.250	.3125	12,400
624	.375-24 UNJF	.550	.3678			.368	.015			14,000
714	.437-14 UNJC	.656	.4375	.166	.213	.438	.023	1.375	.3750	17,000
720	.437-20 UNJF	.642	.4294			.430	.018			19,000
813	.500-13 UNJC	.750	.500	.190	.245	.500	.026	1.500	.3750	22,700
820	.500-20 UNJF	.735	.4919			.492	.020			25,600
1011	.625-11 UNJC	.938	.625	.238	.307	.625	.032	1.750	.5000	36,200
1018	.625-18 UNJF	.921	.6163			.616	.024			41,000
1210	.750-10 UNJC	1.125	.750	.285	.370	.750	.039	2.000	.6250	53,500
1216	.750-16 UNJF	1.107	.7406			.740	.030			59,700
1409	.875-9 UNJC	1.312	.875	.333	.432	.875	.044	2.250	.7500	73,900
1414	.875-14 UNJF	1.293	.8647			.864	.034			81,500
1608	1.000-8 UNJC	1.500	1.000			1.000	.050			96,900
1612	1.000-12 UNJF									106,000
1614	1.000-14 UNJS	1.479	.9886	.380	.495	.988	.040	2.500	.7500	109,000
1807	1.125-7 UNJC	1.688	1.125	.428	.557	1.125	.055	2.812	.8750	122,000
1812	1.125-12 UNJF	1.665	1.1086			1.111	.045			137,000
2007	1.250-7 UNJC	1.875	1.250	.475	.620	1.250	.060	3.125	.8750	155,000
2012	1.250-12 UNJF	1.852	1.2336			1.236	.050			171,000
2206	1.375-6 UNJC	2.062	1.375	.523	.682	1.375	.065	3.437	1.0000	185,000
2212	1.375-12 UNJF	2.038	1.3568			1.360	.055			210,000
2406	1.500-6 UNJC	2.250	1.500	.570	.745	1.500	.070	3.750	1.0000	225,000
2412	1.500-12 UNJF	2.224	1.4818			1.485	.060			253,000

(1) THE TENSILE STRENGTH IS BASED ON 160 KSI STRESS LEVEL AT ROOM TEMPERATURE AND THE TENSILE STRESS AREA PER ASME B1.1.

TOLERANCES ±.010 AND ±2°
 SURFACE ROUGHNESS 125√
 UNLESS OTHERWISE NOTED

FSCM NO. 56878
 CUSTODIAN:
 JENKINTOWN, PA.

DRAFTED IN ACCORDANCE WITH ANSI Y14.5M-1982

DRAWN BY: KATHY SCHWARTZ
 DATE: 8/31/04

APPROVED: S FOSTER
 DATE: 7/20/07

APPROVED: L KLINE

TITLE

SCREW, SOCKET HEAD CAP, HEXAGON RECESS
 A286, 160 KSI UTS, AS8879 THDS.
 APPLICATIONS TO 1,000°F

STANDARDS AND SPECIFICATIONS
 ASTM F837
 EXCEPT AS NOTED

PART NUMBER:
96677

SHEET 1 OF 2



DRAWING NUMBER
SPS-B-96677

ISSUE DATE
8/31/04


REVISION

① 7/12/07

1. MATERIAL: A286 PER CHEMISTRY OF AMS 5731, AMS 5737 OR AMS 5853.
2. HEAT TREAT: TO MEET THE MINIMUM ULTIMATE TENSILE REQUIREMENTS OF 160 KSI.
3. MANUFACTURING REQUIREMENTS: HEAD SHALL BE FORGED.
SOCKET MAY BE FORGED OR MACHINED.
THREADS TO BE ROLLED AFTER PRECIPITATION HEAT TREATMENT.
4. MECHANICAL REQUIREMENTS: TENSILE AS REQUIRED.
EXTENSION TEST IS NOT APPLICABLE.
5. DIMENSIONS, GEOMETRIC TOLERANCE PER ASME B18.3 - INCLUDING MANUFACTURING NOTES NOT LISTED ON THIS DRAWING.
6. LENGTH TOLERANCE:

DIAMETER	UP TO 1" INCL.	OVER 1" TO 2-1/2" INCL.	OVER 2-1/2" TO 6" INCL.	OVER 6"
.086 THRU .375	-.030	-.040	-.060	-.120
7/16 THRU 3/4	-.030	-.060	-.080	-.120
7/8 THRU 1-1/8	-.050	-.100	-.140	-.200

7. PARTS LONGER THAN "T REF" WILL HAVE A MINIMUM THREAD LENGTH AS TABULATED ON SHEET 1. PARTS EQUAL TO OR SHORTER THAN "T REF" WILL BE THREADED TO HEAD.
8. PART NUMBERING: 96677() - () () - () ()

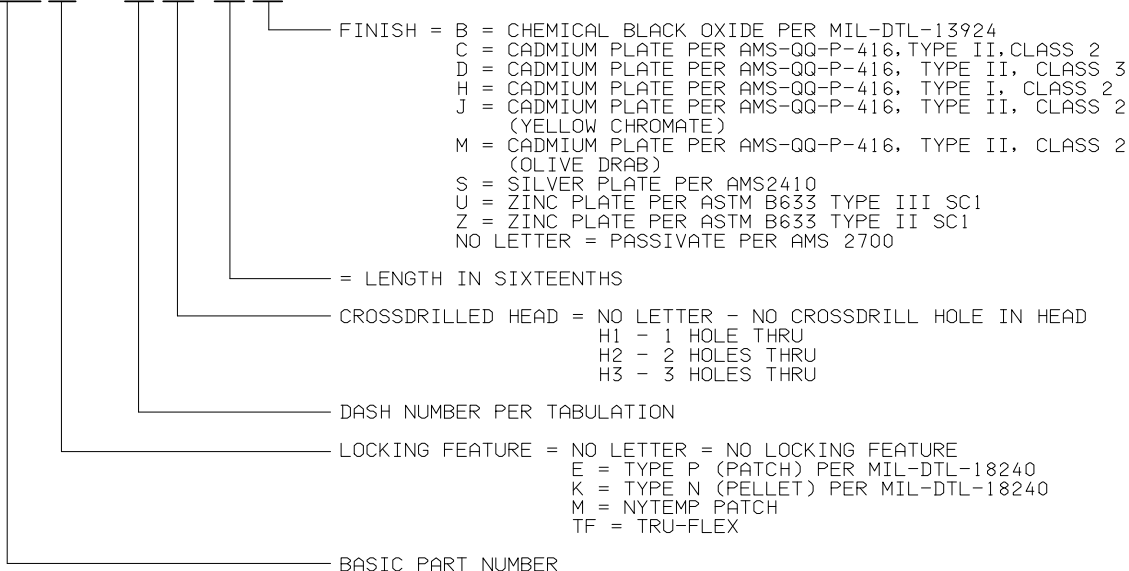

9. PERFORMANCE REQUIREMENTS OF MIL-DTL-18240 APPLY TO SCREWS WITH NON-METALLIC LOCKING FEATURES, INCLUDING NYTEMP. (R)
10. THREAD SIZES NOT LISTED IN TABLE VA OR VB OF MIL-DTL-18240, ONLY A POSITIVE INDICATION OF TORQUE IS REQUIRED FOR 5 UNSEATED INSTALLATIONS AND REMOVALS.

(R) NYTEMP IS A REGISTERED TRADEMARK OF NYLOK FASTENER CORPORATION

TOLERANCES ±.010 AND ±2'
SURFACE ROUGHNESS 125
UNLESS OTHERWISE NOTED

DRAFTED
IN ACCORDANCE
WITH ANSI Y14.5M
1982



PART NUMBER:
96677