



1P

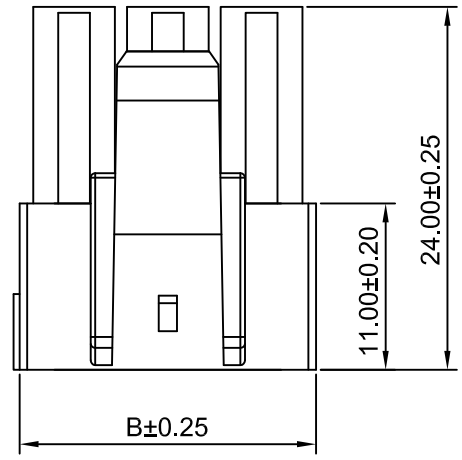

2P~4P

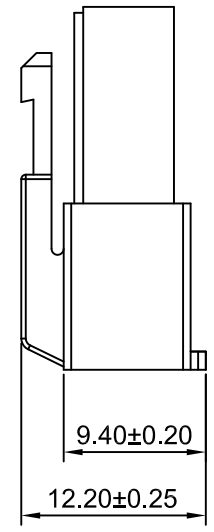

SPECIFICATIONS:
 Current Rating: 20A AC, DC
 Voltage Rating: 600V AC, DC
 Temperature Range: -40°C ~ +105°C
 Contact Resistance: 7mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 2000V AC/minute
 Material: Nylon 66, UL94V-0 (White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
1P	--	7.20	3P	12.40	19.60
2P	6.20	13.40	4P	18.60	25.80

CJT CHANGJIANG CONNECTORS CO., LTD.

Unit	Scale	Sheet	TITLE	
mm	2:1	1 of 1	6.20mm PITCH HOUSING	
DRWN	CHK'D	APPR		
Dengchun Yi	Diankui Wan	Jack Yin		
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO.
A1	MODIFY DRAWING	2021.06.23		C6201HF-XP
A0	NEW RELEASE	2015.04.23		
REV	DESCRIPTION	DATE		
x.x±0.25 x.xx±0.20 x.xxx±0.15 ANGLES ±1°			REV	A1