

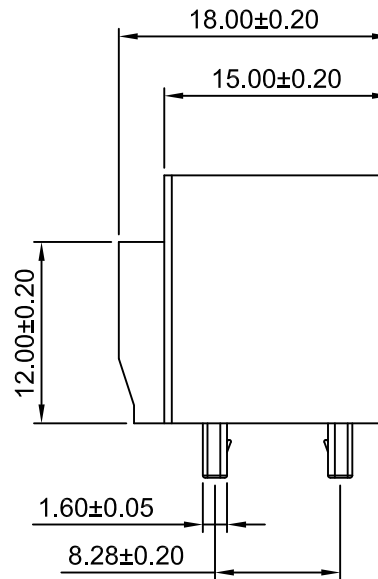


P.C.B LAYOUT
TOLERANCE:±0.05

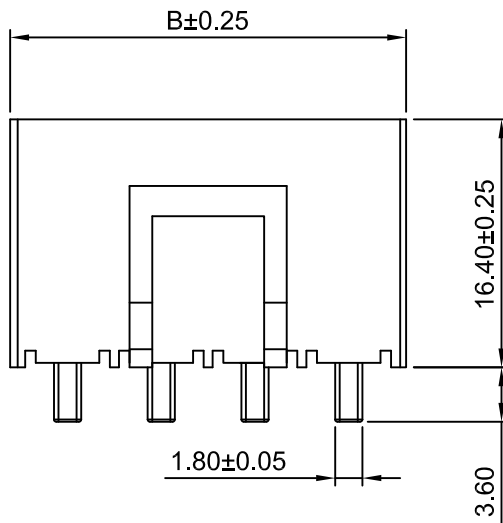

Ordering Information:

C6201WV-2xXP - *** / 2 - *** / 3 - *** / 4 - * / 5

- Part NO.
- Housing Material:
(Blank): Nylon 66, UL94V-0(White)
GWT: Nylon 66, UL94V-0(Beige),
IEC 60335-1, 5th Edition
Glow Wire Capable.
- Pin Material:
(Blank): Phosphor Bronze
HCS: Copper Alloy
- Color:
(Blank): see section 2 Material
BK: Black BL: Blue
RD: Red UV: Ultraviolet
- Finish:
(Blank): Tin over Nickel
G: Gold over Nickel

SPECIFICATIONS:

Current Rating: 23A AC, DC (2 Circuits/AWG#12)
Voltage Rating: 600V AC, DC
Temperature Range: -40°C ~ +105°C
Contact Resistance: 7mΩMax.
Insulation Resistance: 1000MΩMin.
Withstanding Voltage: 2000V AC/minute

Ordering Information & Dimensions

Part NO.	Dimensions(mm)	
	A	B
C6201WV-2x2P	6.20	13.40
C6201WV-2x3P	12.40	19.60
C6201WV-2x4P	18.60	25.80
C6201WV-2x6P	31.00	38.20

CJT CHANGJIANG CONNECTORS CO., LTD.

Unit	Scale	Sheet	TITLE														
mm	2:1	1 of 1	6.20mm PITCH VERTICAL DUAL ROW HEADER														
DRWN	CHK'D	APPR															
Dengchun Yi	Diankui Wan	Jack Yin															
General Tolerances			THIRD ANGLE PROJECTION	DRAWING NO.	REV												
x.xx±0.25 x.xxx±0.20 x.xxxx±0.15 ANGLES ±1°				C6201WV-2xXP	A2												
<table border="1"> <thead> <tr> <th>A2</th> <th>MODIFY DRAWING</th> <th>2021.08.28</th> </tr> <tr> <th>A1</th> <th>ADD THE INFORMATION</th> <th>2020.05.13</th> </tr> <tr> <th>A0</th> <th>NEW RELEASE</th> <th>2010.01.23</th> </tr> <tr> <th>REV</th> <th>DESCRIPTION</th> <th>DATE</th> </tr> </thead> </table>				A2	MODIFY DRAWING	2021.08.28	A1	ADD THE INFORMATION	2020.05.13	A0	NEW RELEASE	2010.01.23	REV	DESCRIPTION	DATE		
A2	MODIFY DRAWING	2021.08.28															
A1	ADD THE INFORMATION	2020.05.13															
A0	NEW RELEASE	2010.01.23															
REV	DESCRIPTION	DATE															