

# EN25QH16A 16 Megabit Serial Flash Memory with 4Kbyte Uniform Sector

## FEATURES

- Single power supply operation
- Full voltage range: 2.7-3.6 volt
- Serial Interface Architecture
- SPI Compatible: Mode 0 and Mode 3
- 16 M-bit Serial Flash
- 16 M-bit/2,048 K-byte/8,192 pages
- 256 bytes per programmable page
- Standard, Dual or Quad SPI
- Standard SPI: CLK, CS#, DI, DO, WP#, HOLD#
- Dual SPI: CLK, CS#, DQ<sub>0</sub>, DQ<sub>1</sub>, WP#, HOLD#
- Quad SPI: CLK, CS#, DQ<sub>0</sub>, DQ<sub>1</sub>, DQ<sub>2</sub>, DQ<sub>3</sub>
- High performance
- 104MHz clock rate for Standard SPI
- 104MHz clock rate for two data bits
- 104MHz clock rate for four data bits
- Low power consumption
- 10mA typical active current
- 1 µA typical power down current
- Uniform Sector Architecture:
- 512 sectors of 4-Kbyte
- 64 blocks of 32-Kbyte
- 32 blocks of 64-Kbyte
- Any sector or block can be erased individually

- Software and Hardware Write Protection:
- Write Protect all or portion of memory via software
- Enable/Disable protection with WP# pin
- High performance program/erase speed
- Page program time: 0.6ms typical
- Sector erase time: 30ms typical
- 32KB Block erase time 100ms typical
- 64KB Block erase time 200ms typical
- Chip erase time: 6 seconds typical
- Lockable 512 byte OTP security sector
- Support Serial Flash Discoverable Parameters (SFDP) signature
- Read Unique ID Number
- Minimum 100K endurance cycle
- Data retention time 20years
- Package Options
- 8 pins SOP 150mil body width
- 8 pins VSOP 150mil body width
- 8 pins SOP 200mil body width
- 8 contact USON (4x3mm)
- 8 contact VDFN (5x6mm)
- 8 pins PDIP
- All Pb-free packages are compliant RoHS, Halogen-Free and REACH.
- Industrial temperature Range


## **GENERAL DESCRIPTION**

The EN25QH16A is a 16 Megabit (2,048 K-byte) Serial Flash memory, with enhanced write protection mechanisms. The EN25QH16A supports the standard Serial Peripheral Interface (SPI), and a high performance Dual/Quad output as well as Dual/Quad I/O using SPI pins: Serial Clock, Chip Select, Serial DQ<sub>0</sub>(DI), DQ<sub>1</sub>(DO), DQ<sub>2</sub>(WP#) and DQ<sub>3</sub>(HOLD#). SPI clock frequencies of up to 104MHz are supported allowing equivalent clock rates of 208MHz (104MHz x 2) for Dual Output and 416MHz (104MHz x 4) for Quad Output when using the Dual/Quad I/O Fast Read instructions. The memory can be programmed 1 to 256 bytes at a time, using the Page Program instruction.

The EN25QH16A is designed to allow either single Sector/Block at a time or full chip erase operation. The EN25QH16A can be configured to protect part of the memory as the software protected mode. The device can sustain a minimum of 100K program/erase cycles on each sector or block.




### Figure.1 CONNECTION DIAGRAMS

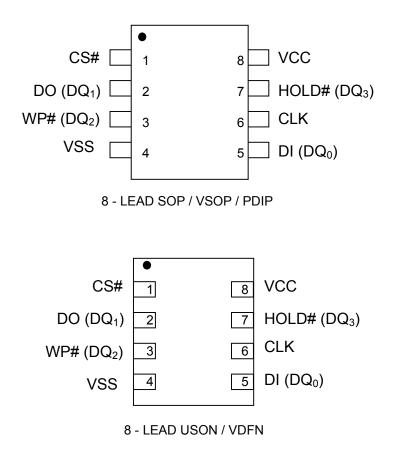



### Figure 2. BLOCK DIAGRAM

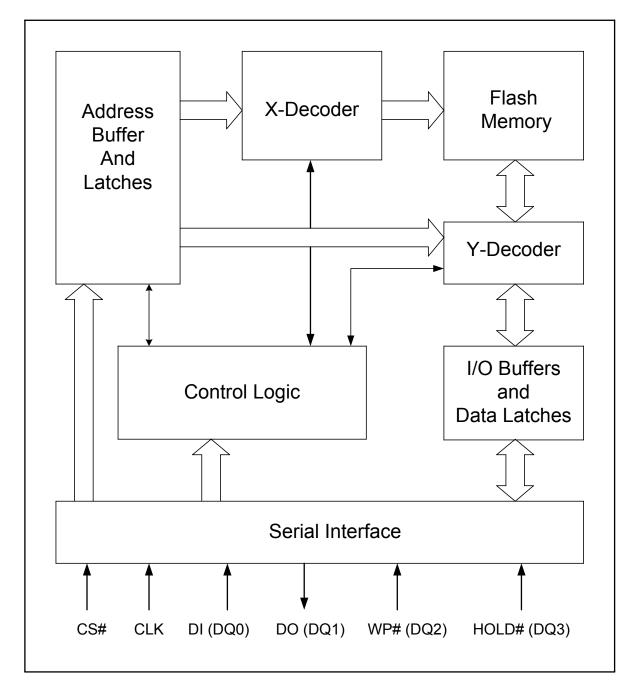

### Note:

1.  $DQ_0$  and  $DQ_1$  are used for Dual and Quad instructions.

2.  $DQ_0 \sim DQ_3$  are used for Quad instructions.



### Table 1. Pin Names

Symbol	Pin Name
CLK	Serial Clock Input
DI (DQ <sub>0</sub> )	Serial Data Input (Data Input Output 0) *1
DO (DQ <sub>1</sub> )	Serial Data Output (Data Input Output 1) *1
CS#	Chip Select
WP# (DQ <sub>2</sub> )	Write Protect (Data Input Output 2) *2
HOLD# (DQ <sub>3</sub> )	HOLD# pin (Data Input Output 3) *2
Vcc	Supply Voltage (2.7-3.6V)
Vss	Ground
NC	No Connect

Note:

1.  $DQ_0$  and  $DQ_1$  are used for Dual and Quad instructions.

2.  $DQ_2 \sim DQ_3$  are used for Quad instructions.

## SIGNAL DESCRIPTION

### Serial Data Input, Output and IOs (DI, DO and DQ<sub>0</sub>, DQ<sub>1</sub>, DQ<sub>2</sub>, DQ<sub>3</sub>)

The EN25QH16A support standard SPI, Dual SPI and Quad SPI operation. Standard SPI instructions use the unidirectional DI (input) pin to serially write instructions, addresses or data to the device on the rising edge of the Serial Clock (CLK) input pin. Standard SPI also uses the unidirectional DO (output) to read data or status from the device on the falling edge CLK.

Dual and Quad SPI instruction use the bidirectional IO pins to serially write instruction, addresses or data to the device on the rising edge of CLK and read data or status from the device on the falling edge of CLK.

### Serial Clock (CLK)

The SPI Serial Clock Input (CLK) pin provides the timing for serial input and output operations. ("See SPI Mode")

### Chip Select (CS#)

The SPI Chip Select (CS#) pin enables and disables device operation. When CS# is high the device is deselected and the Serial Data Output (DO, or DQ<sub>0</sub>, DQ<sub>1</sub>, DQ<sub>2</sub> and DQ<sub>3</sub>) pins are at high impedance. When deselected, the devices power consumption will be at standby levels unless an internal erase, program or status register cycle is in progress. When CS# is brought low the device will be selected, power consumption will increase to active levels and instructions can be written to and data read from the device. After power-up, CS# must transition from high to low before a new instruction will be accepted.

### Hold (HOLD#)

The HOLD# pin allows the device to be paused while it is actively selected. When HOLD# is brought low, while CS# is low, the DO pin will be at high impedance and signals on the DI and CLK pins will be ignored (don't care). The hold function can be useful when multiple devices are sharing the same SPI signals. The HOLD# function is only available for standard SPI and Dual SPI operation, when during Quad SPI, this pin is the Serial Data IO (DQ<sub>3</sub>) for Quad I/O operation.

### Write Protect (WP#)

The Write Protect (WP#) pin can be used to prevent the Status Register from being written. Used in conjunction with the Status Register's Block Protect (BP0, BP1, BP2 and BP3) bits and Status Register Protect (SRP) bits, a portion or the entire memory array can be hardware protected. The WP# function is only available for standard SPI and Dual SPI operation, when during Quad SPI, this pin is the Serial Data IO (DQ<sub>2</sub>) for Quad I/O operation.



## **MEMORY ORGANIZATION**

- The memory is organized as:
- •
- 2,097,152 bytes Uniform Sector Architecture • 64 blocks of 32-Kbyte 32 blocks of 64-Kbyte 512 sectors of 4-Kbyte 8,092 pages (256 bytes each)
- •

Each page can be individually programmed (bits are programmed from 1 to 0). The device is Sector, Block or Chip Erasable but not Page Erasable.



64KB Block	32KB Block	Sector	Address range			
	63	511	1FF000h	1FFFFFh		
31						
	62	496	1F0000h	1F0FFFh		
30	61	495	1EF000h	1EFFFFh		
	01					
	60	480	1E0000h	1E0FFFh		
	59	479	1DF000h	1DFFFFh		
29						
	58	464	1D0000h	1D0FFFh		
	57	463	1CF000h	1CFFFFh		
28	57					
	56	448	1C0000h	1C0FFFh		
	55	447	1BF000h	1BFFFFh		
27	55		:	:		
	54	432	1B0000h	1B0FFFh		
	F2	431	1AF000h	1AFFFFh		
26	53			:		
20	52	416	1A0000h	1A0FFFh		
	<b>5</b> 4	415	19F000h	19FFFFh		
25	51					
20	50	400	: 190000h	: 190FFFh		
		399	18F000h	190FFFh 18FFFFh		
24	49	:	:	:		
24	48	:	:	: 400FFFb		
		<u>384</u> 383	180000h 17F000h	180FFFh 17FFFFh		
23	47	:	:	:		
25	46	:	: 170000b	170FFFb		
		<u>368</u> 367	170000h 16F000h	170FFFh 16FFFFh		
22	45		:	:		
22	44		:			
		352 351	160000h 15F000h	160FFFh 15FFFFh		
21	43	:	10F00011	:		
21	42	:	:	:		
		336	150000h	150FFFh		
20	41	335	14F000h :	14FFFFh :		
20	40	:	:			
		320	140000h	140FFFh 13FFFFh		
10	39	319 :	13F000h :	:		
19	38					
		304	130000h	130FFFh		
40	37	303	12F000h	12FFFFh :		
18	36					
		288	120000h	120FFFh		
	35	287	11F000h	11FFFFh ·		
17	24					
	34	272	110000h	110FFFh		
	33	271	10F000h	10FFFFh		
16						
	32	256	100000h	100FFFh		

#### Table 2. Uniform Block Sector Architecture

This Data Sheet may be revised by subsequent versions or modifications due to changes in technical specifications.



# EN25QH16A

64KB Block	32KB Block	Sector	Address range			
	31	255	0FF000h	0FFFFFh		
15						
	30	240	0F0000h	0F0FFFh		
	29	239	0EF000h	0EFFFFh		
14	29					
	28	. 224	0E0000h	0E0FFFh		
	07	223	0DF000h	0DFFFFh		
13	27					
10	26	208	: 0D0000h	: 0D0FFFh		
		208	0CF000h	0CFFFh		
12	25		:	:		
12	24		:	:		
		192	0C0000h	0C0FFFh		
	13	191 :	0BF000h	0BFFFFh		
11	22					
	22	176	0B0000h	0B0FFFh		
	21	175	0AF000h	0AFFFFh		
10						
	20	160	0A0000h	0A0FFFh		
	19	159	09F000h	09FFFFh		
9						
	18	144	090000h	090FFFh		
	17	143	08F000h	08FFFFh		
8						
	16	128	080000h	080FFFh		
	15	127	07F000h	07FFFFh		
7						
	14	112	070000h	070FFFh		
	13	111	06F000h	06FFFFh		
6	15					
	12	96	060000h	060FFFh		
	44	95	05F000h	05FFFFh		
5	11					
Ũ	10		050000h	050FFFh		
		79	04F000h	04FFFFh		
4	9	:	:	:		
4	8	64	: 040000h	040FFFh		
		63	040000h	03FFFh		
3	7					
3	6		=			
		<u>48</u> 47	030000h 02F000h	030FFFh 02FFFFh		
0	5	:	0240000			
2	4	:				
		32	020000h	020FFFh		
	3	31	01F000h	01FFFFh		
1	2					
	۷	16	010000h	010FFFh		
	1	15	00F000h	00FFFFh		
0						
	0	0	000000h	000FFFh		




### **OPERATING FEATURES**

### Standard SPI Modes

The EN25QH16A is accessed through a SPI compatible bus consisting of four signals: Serial Clock (CLK), Chip Select (CS#), Serial Data Input (DI) and Serial Data Output (DO). Both SPI bus operation Modes 0 (0,0) and 3 (1,1) are supported. The primary difference between Mode 0 and Mode 3, as shown in Figure 3, concerns the normal state of the CLK signal when the SPI bus master is in standby and data is not being transferred to the Serial Flash. For Mode 0 the CLK signal is normally low. For Mode 3 the CLK signal is normally high. In either case data input on the DI pin is sampled on the rising edge of the CLK. Data output on the DO pin is clocked out on the falling edge of CLK.

#### Figure 3. SPI Modes

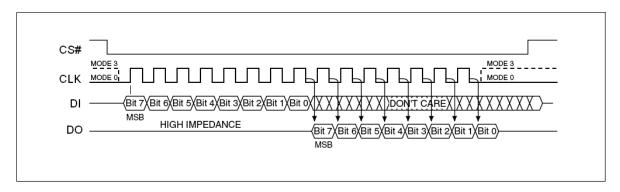

#### **Dual SPI Instruction**


The EN25QH16A supports Dual SPI operation when using the "Dual Output Fast Read and Dual I/O Fast Read " (3Bh and BBh) instructions. These instructions allow data to be transferred to or from the Serial Flash memory at two to three times the rate possible with the standard SPI. The Dual Read instructions are ideal for quickly downloading code from Flash to RAM upon power-up (code-shadowing) or for application that cache code-segments to RAM for execution. The Dual output feature simply allows the SPI input pin to also serve as an output during this instruction. When using Dual SPI instructions the DI and DO pins become bidirectional I/O pins;  $DQ_0$  and  $DQ_1$ . All other operations use the standard SPI interface with single output signal.

#### Quad I/O SPI Modes

The EN25QH16A supports Quad input / output operation when using the Quad I/O Fast Read (EBh). This instruction allows data to be transferred to or from the Serial Flash memory at four to six times the rate possible with the standard SPI. The Quad Read instruction offer a significant improvement in continuous and random access transfer rates allowing fast code-shadowing to RAM or for application that cache code-segments to RAM for execution. When using Quad SPI instruction the DI and DO pins become bidirectional I/O pins;  $DQ_0$  and  $DQ_1$ , and the WP# and HOLD# pins become  $DQ_2$  and  $DQ_3$  respectively.




### Figure 4. Quad I/O SPI Modes

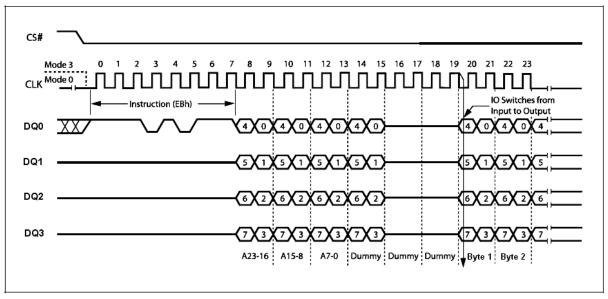

### Full Quad SPI Modes (QPI)

The EN25QH16A also supports Full Quad SPI Mode (QPI) function while using the Enable Quad Peripheral Interface mode (EQPI) (38h). When using Quad SPI instruction the DI and DO pins become bidirectional I/O pins;  $DQ_0$  and  $DQ_1$ , and the WP# and HOLD# pins become  $DQ_2$  and  $DQ_3$  respectively.

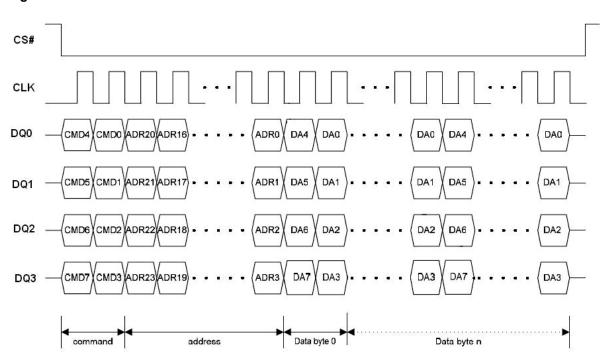

### Figure 5. Full Quad SPI Modes

This Data Sheet may be revised by subsequent versions9Elite Semiconductor Memory Technology Inc.or modifications due to changes in technical specifications.9

Rev. C, Issue Date: 2016/03/22



#### **Page Programming**

To program one data byte, two instructions are required: Write Enable (WREN), which is one byte, and a Page Program (PP) or Quad Input Page Program (QPP) sequence, which consists of four bytes plus data. This is followed by the internal Program cycle (of duration  $t_{PP}$ ).

To spread this overhead, the Page Program (PP) or Quad Input Page Program (QPP) instruction allows up to 256 bytes to be programmed at a time (changing bits from 1 to 0) provided that they lie in consecutive addresses on the same page of memory.

### Sector Erase, Half Block Erase, Block Erase and Chip Erase

The Page Program (PP) or Quad Input Page Program (QPP) instruction allows bits to be reset from 1 to 0. Before this can be applied, the bytes of memory need to have been erased to all 1s (FFh). This can be achieved a sector at a time, using the Sector Erase (SE) instruction, half a block at a time using the Half Block Erase (HBE) instruction, a block at a time using the Block Erase (BE) instruction or throughout the entire memory, using the Chip Erase (CE) instruction. This starts an internal Erase cycle (of duration  $t_{SE}$ ,  $t_{HBE}$ ,  $t_{BE}$  or  $t_{CE}$ ). The Erase instruction must be preceded by a Write Enable (WREN) instruction.

#### Polling During a Write, Program or Erase Cycle

A further improvement in the time to Write Status Register (WRSR), Program (PP, QPP) or Erase (SE, HBE, BE or CE) can be achieved by not waiting for the worst case delay ( $t_W$ ,  $t_{PP}$ ,  $t_{SE}$ ,  $t_{HBE}$ ,  $t_{BE}$  or  $t_{CE}$ ). The Write In Progress (WIP) bit is provided in the Status Register so that the application program can monitor its value, polling it to establish when the previous Write cycle, Program cycle or Erase cycle is complete.

#### Active Power, Stand-by Power and Deep Power-Down Modes

When Chip Select (CS#) is Low, the device is enabled, and in the Active Power mode. When Chip Select (CS#) is High, the device is disabled, but could remain in the Active Power mode until all internal cycles have completed (Program, Erase, and Write Status Register). The device then goes into the Stand-by Power mode. The device consumption drops to  $I_{CC1}$ .

The Deep Power-down mode is entered when the specific instruction (the Enter Deep Power-down Mode (DP) instruction) is executed. The device consumption drops further to  $I_{CC2}$ . The device remains in this mode until another specific instruction (the Release from Deep Power-down Mode and Read Device ID (RDI) instruction) is executed.

All other instructions are ignored while the device is in the Deep Power-down mode. This can be used as an extra software protection mechanism, when the device is not in active use, to protect the device from inadvertent Write, Program or Erase instructions.

### Write Protection

Applications that use non-volatile memory must take into consideration the possibility of noise and other adverse system conditions that may compromise data integrity. To address this concern the EN25QH16A provides the following data protection mechanisms:

- Power-On Reset and an internal timer (t<sub>PUW</sub>) can provide protection against inadvertent changes while the power supply is outside the operating specification.
- Program, Erase and Write Status Register instructions are checked that they consist of a number of clock pulses that is a multiple of eight, before they are accepted for execution.
- All instructions that modify data must be preceded by a Write Enable (WREN) instruction to set the Write Enable Latch (WEL) bit. This bit is returned to its reset state by the following events:
   Power-up
  - Write Disable (WRDI) instruction completion or Write Status Register (WRSR) instruction completion or Page Program (PP), Quad Input Page Program (QPP) instruction completion or Sector Erase (SE) instruction completion or Half Block Erase (HBE) / Block Erase (BE) instruction completion or Chip Erase (CE) instruction completion
- The Block Protect (BP3, BP2, BP1, BP0) bits allow part of the memory to be configured as readonly. This is the Software Protected Mode (SPM).
- The Write Protect (WP#) signal allows the Block Protect (BP3, BP2, BP1, BP0) bits and Status Register Protect (SRP) bit to be protected. This is the Hardware Protected Mode (HPM).
- In addition to the low power consumption feature, the Deep Power-down mode offers extra software protection from inadvertent Write, Program and Erase instructions, as all instructions are ignored except one particular instruction (the Release from Deep Power-down instruction).



Statu	s Regis	ster Co	ntent	Memory Content				
BP3 Bit	BP2 Bit	BP1 Bit	BP0 Bit	Protect Areas	Addresses	Density(KB)	Portion	
0	0	0	0	None	None	None	None	
0	0	0	1	Block 31	1F0000h-1FFFFFh	64KB	Upper 1/32	
0	0	1	0	Block 30 to 31	1E0000h-1FFFFFh	128KB	Upper 2/32	
0	0	1	1	Block 28 to 31	1C0000h-1FFFFFh	256KB	Upper 4/32	
0	1	0	0	Block 24 to 31	180000h-1FFFFFh	512KB	Upper 8/32	
0	1	0	1	Block 16 to 31	100000h-1FFFFFh	1024KB	Upper 16/32	
0	1	1	0	All	000000h-1FFFFFh	2048KB	All	
0	1	1	1	All	000000h-1FFFFFh	2048KB	All	
1	0	0	0	None	None	None	None	
1	0	0	1	Block 0	000000h-00FFFFh	64KB	Lower 1/32	
1	0	1	0	Block 0 to 1	000000h-01FFFFh	128KB	Lower 2/32	
1	0	1	1	Block 0 to 3	000000h-03FFFFh	256KB	Lower 4/32	
1	1	0	0	Block 0 to 7	000000h-07FFFFh	512KB	Lower 8/32	
1	1	0	1	Block 0 to 15	000000h-0FFFFh	1024KB	Lower 16/32	
1	1	1	0	All	000000h-1FFFFFh	2048KB	All	
1	1	1	1	All	000000h-1FFFFFh	2048KB	All	

Table 3. Protected Area Sizes Sector Organization

#### Enable Boot Lock

The Enable Boot Lock feature enables user to lock the 64KB block/sector on the top/bottom of the device for protection. This feature is activated by issue Writing Status Register (05h) after entering OTP mode.

The bits' definitions are described in the following table.

Register	Туре	Description	Function
			0 (default)
S3	OTP	Enable 64KB-block/Sector Boot lock	1 : Permanent lock selected 64KB-Block/Sector
S4	OTP	64KB-Block/Sector switch	0 : 64KB-Block (default)
- 34	UIF	04RB-BIOCK/Sector Switch	1 : Sector
S6	S6 OTP Top/Bottom switch		0 : Top (default)
30	UIF	Top/Bottom switch	1 : Bottom

Table 4. The Enable Boot Lock feature



### INSTRUCTIONS

All instructions, addresses and data are shifted in and out of the device, most significant bit first. Serial Data Input (DI) is sampled on the first rising edge of Serial Clock (CLK) after Chip Select (CS#) is driven Low. Then, the one-byte instruction code must be shifted in to the device, most significant bit first, on Serial Data Input (DI), each bit being latched on the rising edges of Serial Clock (CLK).

The instruction set is listed in Table 5. Every instruction sequence starts with a one-byte instruction code. Depending on the instruction, this might be followed by address bytes, or by data bytes, or by both or none. Chip Select (CS#) must be driven High after the last bit of the instruction sequence has been shifted in. In the case of a Read Data Bytes (READ), Read Data Bytes at Higher Speed (Fast\_Read), Dual Output Fast Read (3Bh), Dual I/O Fast Read (BBh), Quad Input/Output FAST\_READ (EBh), Read Status Register (RDSR), Read Information Register (RDIFR) or Release from Deep Power-down, and Read Device ID (RDI) instruction, the shifted-in instruction sequence is followed by a data-out sequence. Chip Select (CS#) can be driven High after any bit of the data-out sequence is being shifted out.

In the case of a Page Program (PP), Quad Input Page Program (QPP), Sector Erase (SE), Half Block Erase (HBE), Block Erase (BE), Chip Erase (CE), Write Status Register (WRSR), Write Enable (WREN), Write Disable (WRDI) or Deep Power-down (DP) instruction, Chip Select (CS#) must be driven High exactly at a byte boundary, otherwise the instruction is rejected, and is not executed. That is, Chip Select (CS#) must driven High when the number of clock pulses after Chip Select (CS#) being driven Low is an exact multiple of eight. For Page Program, if at any time the input byte is not a full byte, nothing will happen and WEL will not be reset.

In the case of multi-byte commands of Page Program (PP), Quad Input Page Program (QPP) and Release from Deep Power Down (RES) minimum number of bytes specified has to be given, without which, the command will be ignored.

In the case of Page Program, if the number of byte after the command is less than 4 (at least 1 data byte), it will be ignored too. In the case of SE, HBE and BE, exact 24-bit address is a must, any less or more will cause the command to be ignored.

All attempts to access the memory array during a Write Status Register cycle, Program cycle or Erase cycle are ignored, and the internal Write Status Register cycle, Program cycle or Erase cycle continues unaffected.



#### Table 5A. Instruction Set

Instruction Name	Byte 1 Code	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	n-Bytes
EQPI	38h						
RSTQIO <sup>(1)</sup> Release Quad I/O or Fast Read Enhanced Mode	FFh						
RSTEN	66h						
RST <sup>(2)</sup>	99h						
Write Enable	06h						
Write Disable / Exit OTP mode	04h						
Read Status Register	05h	(S7-S0) <sup>(3)</sup>					continuous <sup>(4)</sup>
Write Status Register	01h	S7-S0					
Page Program	02h	A23-A16	A15-A8	A7-A0	D7-D0	Next byte	continuous
Quad Input Page Program	32h	A23-A16	A15-A8	A7-A0	(D7-D0,) <sup>(5)</sup>		(one byte per 2 clocks, continuous)
Sector Erase	20h	A23-A16	A15-A8	A7-A0			
32KB Half Block Erase (HBE)	52h	A23-A16	A15-A8	A7-A0			
64KB Block Erase	D8h	A23-A16	A15-A8	A7-A0			
Chip Erase	C7h/ 60h						
Deep Power-down	B9h						
Release from Deep Power-down, and read Device ID	ABh	dummy	dummy	dummy	(ID7-ID0)		(6)
Release from Deep Power-down							
Manufacturer/ Device ID	90h	dummy	dummy	00h 01h	(M7-M0) (ID7-ID0)	(ID7-ID0) (M7-M0)	(7)
Read Identification	9Fh	(M7-M0)	(ID15-ID8)	(ID7-ID0)	(8)		
Enter OTP mode	3Ah						
Read SFDP mode and Unique ID Number	5Ah	A23-A16	A15-A8	A7-A0	dummy	(D7-D0)	(Next Byte) continuous

Notes:

 Device accepts eight-clocks command in Standard SPI mode, or two-clocks command in Quad SPI mode
 RST command only executed if RSTEN command is executed first. Any intervening command will disable Reset.
 Data bytes are shifted with Most Significant Bit first. Byte fields with data in parenthesis "()" indicate data being read from the device on the DO pin

4. The Status Register contents will repeat continuously until CS# terminate the instruction

5. Quad Data

 $\begin{array}{l} DQ_0 = (D4, D0, \dots ) \\ DQ_1 = (D5, D1, \dots ) \end{array}$ 

DQ<sub>2</sub> = (D6, D2, .....)

 $DQ_3 = (D7, D3, \dots)$ 

6. The Device ID will repeat continuously until CS# terminates the instruction

The Device ID will repeat continuously unit CS# terminates the instruction.
 The Manufacturer ID and Device ID bytes will repeat continuously until CS# terminates the instruction.
 00h on Byte 4 starts with MID and alternate with DID, 01h on Byte 4 starts with DID and alternate with MID
 (M7-M0) : Manufacturer, (ID15-ID8) : Memory Type, (ID7-ID0) : Memory Capacity



### Table 5B. Instruction Set (Read Instruction)

Instruction Name	OP Code	Address bits	Dummy bits / Clocks (Default)	Data Out	Remark
Read Data	03h	24 bits	0	(D7-D0,)	(Next Byte) continuous
Fast Read	0Bh	24 bits	8 bits / 8 clocks	(D7-D0,)	(Next Byte) continuous
Dual Output Fast Read	3Bh	24 bits	8 bits / 8 clocks	(D7-D0,)	(one byte Per 4 clocks, continuous)
Dual I/O Fast Read	BBh	24 bits	8 bits / 4 clocks	(D7-D0,)	(one byte Per 4 clocks, continuous)
Quad I/O Fast Read	EBh	24 bits	24 bits / 6 clocks	(D7-D0,)	(one byte per 2 clocks, continuous)

### Table 5C. Instruction Set (Read Instruction support mode and dummy cycle setting)

Instruction Name	OP Code	Start From	n SPI/QPI	Dummy Cycle		
Instruction Name	OF Code	SPI	QPI	SPI	QPI	
Read Data	03h	Yes	No	N/A	N/A	
Fast Read	0Bh	Yes	Yes	8 clocks	6 clocks	
Dual Output Fast Read	3Bh	Yes	No	8 clocks	N/A	
Dual I/O Fast Read	BBh	Yes	No	4 clocks	N/A	
Quad I/O Fast Read	EBh	Yes	Yes	6 clocks	6 clocks	
Quad Input/Output Fast Read Enhance Performance Mode	EBh	Yes	Yes	6 clocks ( 2 clocks are performance enhance indicator)	6 clocks ( 2 clocks are performance enhance indicator)	

Note:

1. 'Start From SPI/QPI' means if this command is initiated from SPI or QPI mode.



Table 6. Manufacturer and Device Identification

OP Code	(M7-M0)	(ID15-ID0)	(ID7-ID0)
ABh			14h
90h	1Ch		14h
9Fh	1Ch	7015h	

### Enable Quad Peripheral Interface mode (EQPI) (38h)

The Enable Quad Peripheral Interface mode (EQPI) instruction will enable the flash device for Quad SPI bus operation. Upon completion of the instruction, all instructions thereafter will be 4-bit multiplexed input/output until a power cycle or "Reset Quad I/O instruction "instruction, as shown in Figure 6. The device did not support the Read Data Bytes (READ) (03h), Dual Output Fast Read (3Bh) and Dual Input/Output FAST\_READ (BBh) and Quad Input Page Program (32h) modes while the Enable Quad Peripheral Interface mode (EQPI) (38h) turns on.

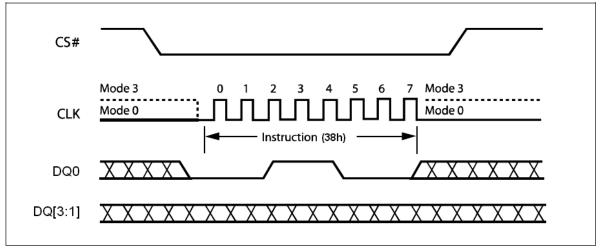


Figure 6. Enable Quad Peripheral Interface mode Sequence Diagram

### Reset Quad I/O (RSTQIO) or Release Quad I/O Fast Read Enhancement Mode (FFh)

The Reset Quad I/O instruction resets the device to 1-bit Standard SPI operation. To execute a Reset Quad I/O operation, the host drives CS# low, sends the Reset Quad I/O command cycle (FFh) then, drives CS# high. This command can't be used in Standard SPI mode.

User also can use the 0xFFh command to release the Quad I/O Fast Read Enhancement Mode. The detail description, please see the Quad I/O Fast Read Enhancement Mode section.

### Note:

If the system is in the Quad I/O Fast Read Enhance Mode in QPI Mode, it is necessary to execute 0xFFh command by two times. The first 0xFFh command is to release Quad I/O Fast Read Enhance Mode, and the second 0xFFh command is to release QPI Mode.



### Reset-Enable (RSTEN) (66h) and Reset (RST) (99h)

The Reset operation is used as a system (software) reset that puts the device in normal operating Ready mode. This operation consists of two commands: Reset-Enable (RSTEN) and Reset (RST).

To reset the EN25QH16A the host drives CS# low, sends the Reset-Enable command (66h), and drives CS# high. Next, the host drives CS# low again, sends the Reset command (99h), and drives CS# high.

The Reset operation requires the Reset-Enable command followed by the Reset command. Any command other than the Reset command after the Reset-Enable command will disable the Reset-Enable.

A successful command execution will reset the Status register and the Information register to data = 00h, see Figure 7 for SPI Mode and Figure 7.1 for QPI Mode. A device reset during an active Program or Erase operation aborts the operation, which can cause the data of the targeted address range to be corrupted or lost. Depending on the prior operation, the reset timing may vary. Recovery from a Write operation requires more software latency time ( $t_{SR}$ ) than recovery from other operations. Please Figure 7.2.




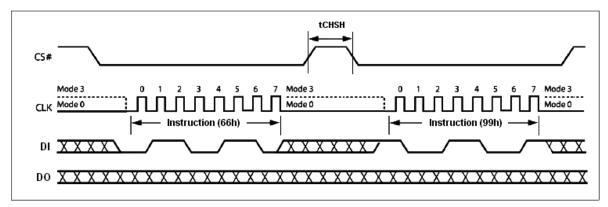


Figure 7. Reset-Enable and Reset Sequence Diagram

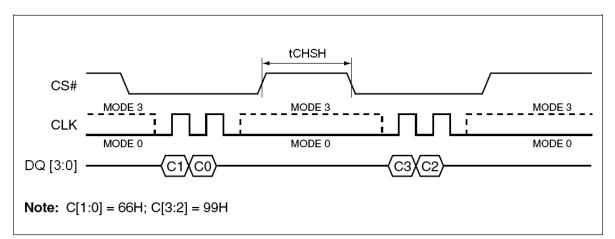



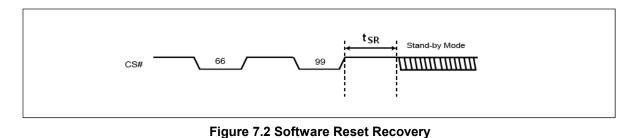


This Data Sheet may be revised by subsequent versions16Elite Semiconductor Memory Technology Inc.or modifications due to changes in technical specifications.16

Rev. C, Issue Date: 2016/03/22



### Software Reset Flow

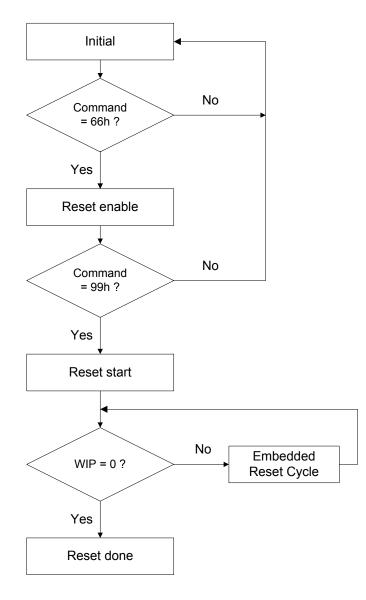

### Note:

- 1. Reset-Enable (RSTEN) (66h) and Reset (RST) (99h) commands need to match standard SPI or QPI (Full Quad) mode.
- 2. Continue (Enhance) EB mode need to use quad Reset-Enable (RSTEN) (66h) and quad Reset (RST) (99h) commands.
- 3. If user is not sure it is in SPI or Quad mode, we suggest to execute sequence as follows:
- Quad Reset-Enable (RSTEN) (66h) -> Quad Reset (RST) (99h) -> SPI Reset-Enable (RSTEN) (66h) -> SPI Reset (RST) (99h) to reset.
- 4. The reset command could be executed during embedded program and erase process, QPI mode and Continue EB mode to back to SPI mode.
- 5. This flow cannot release the device from Deep power down mode.
- 6. The Status Register Bit and Information register Bit will reset to default value after reset done.
- 7. If user reset device during erase, the embedded reset cycle software reset latency will take about 28us in worst case.



### Write Enable (WREN) (06h)

The Write Enable (WREN) instruction (Figure 8) sets the Write Enable Latch (WEL) bit. The Write Enable Latch (WEL) bit must be set prior to every Page Program (PP), Sector Erase (SE), Half Block Erase (HBE), Block Erase (BE), Chip Erase (CE) and Write Status Register (WRSR) instruction. The Write Enable (WREN) instruction is entered by driving Chip Select (CS#) Low, sending the instruction code, and then driving Chip Select (CS#) High.

The instruction sequence is shown in Figure 9.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.


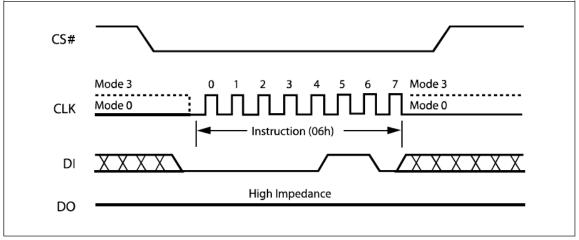


Figure 8. Write Enable Instruction Sequence Diagram

#### Write Disable (WRDI) (04h)


The Write Disable instruction (Figure 9) resets the Write Enable Latch (WEL) bit in the Status Register to a 0 or exit from OTP mode to normal mode. The Write Disable instruction is entered by driving Chip Select (CS#) low, shifting the instruction code "04h" into the DI pin and then driving Chip Select (CS#) high. Note that the WEL bit is automatically reset after Power-up and upon completion of the Write Status Register, Page Program, Sector Erase, Half Block Erase (HBE), Block Erase (BE) and Chip Erase instructions.

The instruction sequence is shown in Figure 9.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.

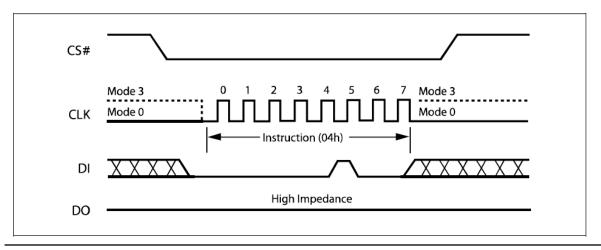

This Data Sheet may be revised by subsequent versions 18 Elite Semiconductor Memory Technology Inc. or modifications due to changes in technical specifications.



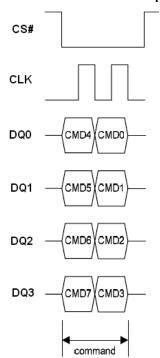

#### Figure 9. Write Disable Instruction Sequence Diagram



### Read Status Register (RDSR) (05h)

The Read Status Register (RDSR) instruction allows the Status Register to be read. The Status Register may be read at any time, even while a Program, Erase or Write Status Register cycle is in progress. When one of these cycles is in progress, it is recommended to check the Write In Progress (WIP) bit before sending a new instruction to the device. It is also possible to read the Status Register continuously, as shown in Figure 10.

The instruction sequence is shown in Figure 10.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.

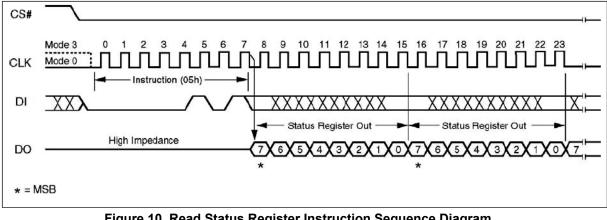


Figure 10. Read Status Register Instruction Sequence Diagram



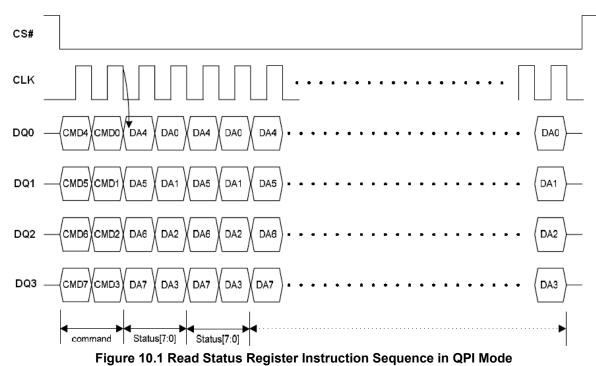


Table 7. Status Register Bit Locations

	S7	S6		S5	S	64	S	3	S2	S1	S0
SRP bit	OTP_LOCK bit	WHDIS bit	TB bit	BP3 bit	BP2 bit	4KB BL bit (4KB boot lock)	BP1 bit	EBL bit (Enable boot lock)	BP0 bit	WEL bit	WIP bit

Table 7. 1 Status Register Bit Locations (In Normal mode)

S7	S6	S5	S4	S3	S2	S1	S0
SRP Status Register Protect	WHDIS bit (WP# and Hold# disabled)	BP3 (Block Protected bits)	BP2 (Block Protected bits)	BP1 (Block Protected bits)	BP0 (Block Protected bits)	WEL bit (Write Enable Latch)	WIP bit (Write In Progress bit)
1 = status register write disable	1 = WP# and HOLD# disable 0 = WP# and HOLD# enable	(note 2)	(note 2)	(note 2)	(note 2)	1 = write enable 0 = not write enable	1 = write operation 0 = not in write operation
Non-volatile bit	Non-volatile bit	Non-volatile bit	Non-volatile bit	Non-volatile bit	Non-volatile bit	Read only bit	Read only bit



S7	S6	S5	S4	S3	S2	S1	S0
OTP_LOCK bit	TB bit (Top / Bottom Protect)	none	4KB BL bit (4KB boot lock)	EBL bit (Enable boot lock)	none	WEL bit (Write Enable Latch)	WIP bit (Write In Progress bit)
1 = OTP sector is protected	1 = Bottom 0 = Top (default 0)		1 = Sector 0 = 64KB Block (default 0)	1 = Permanent lock selected 64KB- Block/Sector		1 = write enable 0 = not write enable	1 = write operation 0 = not in write operation
OTP bit	OTP bit		OTP bit	OTP bit		Read only bit	Read only bit

Note

1. In OTP mode, S7 bit is served as OTP\_LOCK bit; S6 bit is served as TB bit; S4 bit is served as 4KB BL bit; S3 bit is served as EBL bit; S1 bit is served as WEL bit and S0 bit is served as WIP bit.

2. See the table 3 "Protected Area Sizes Sector Organization".

The status and control bits of the Status Register are as follows:

**WIP bit.** The Write In Progress (WIP) bit indicates whether the memory is busy with a Write Status Register, Program or Erase cycle. When set to 1, such a cycle is in progress, when reset to 0 no such cycle is in progress.

**WEL bit.** The Write Enable Latch (WEL) bit indicates the status of the internal Write Enable Latch. When set to 1 the internal Write Enable Latch is set, when set to 0 the internal Write Enable Latch is reset and no Write Status Register, Program or Erase instruction is accepted.

**BP3, BP2, BP1, BP0 bits.** The Block Protect (BP3, BP2, BP1, BP0) bits are non-volatile. They define the size of the area to be software protected against Program and Erase instructions. These bits are written with the Write Status Register (WRSR) instruction. When one or both of the Block Protect (BP3, BP2, BP1, BP0) bits is set to 1, the relevant memory area (as defined in Table 3.) becomes protected against Page Program (PP) Sector Erase (SE) and , Block Erase (BE), instructions. The Block Protect (BP3, BP2, BP1, BP0) bits can be written provided that the Hardware Protected mode has not been set. The Chip Erase (CE) instruction is executed if, and only if, all Block Protect (BP3, BP2, BP1, BP0) bits are 0.

**WHDIS bit.** The WP# and Hold# Disable bit (WHDIS bit), non-volatile bit, it indicates the WP# and HOLD# are enabled or not. When it is "0" (factory default), the WP# and HOLD# are enabled. On the other hand, while WHDIS bit is "1", the WP# and HOLD# are disabled. No matter WHDIS is "0" or

"1", the system can executes Quad Input/Output FAST\_READ (EBh) or EQPI (38h) command directly. User can use Flash Programmer to set WHDIS bit as "1" and then the host system can let WP# and HOLD# keep floating in SPI mode.

**SRP bit** / The Status Register Protect (SRP) bit is operated in conjunction with the Write Protect (WP#) signal. The Status Register Write Protect (SRP) bit and Write Protect (WP#) signal allow the device to be put in the Hardware Protected mode (when the Status Register Protect (SRP) bit is set to 1, and Write Protect (WP#) is driven Low). In this mode, the non-volatile bits of the Status Register (SRP, BP3, BP2, BP1, BP0) become read-only bits and the Write Status Register (WRSR) instruction is no longer accepted for execution.

In OTP mode, S7, S6, S4, S3, S1 and S0 are served as OTP\_Lock Bit, TB bit, 4KB BL bit, EBL, WEL and WIP bit.

#### Enable Boot Lock bit (S3)

When this bit is programmed to '1' by WRSR command in OTP mode, the Top/Bottom switch bit and 64KB-Block/Sector switch bit and the selected sector/block will be permanent locked. The Enable Boot Lock bit can only be programmed once.



### 64KB-Block/Sector switch bit (S4)

This bit is set by WRSR command in OTP mode. It is used to set the protection area size as block (64KB) or sector (4KB).

#### Top/Bottom switch bit (S6)

This bit is set by WRSR command in OTP mode. It is used to set the protected 64KB-Block/Sector location to the top/bottom in the device.

### OTP\_LOCK bit. (S7)

This bit is served as OTP\_LOCK bit, user can read/program/erase OTP sector as normal sector while OTP\_LOCK value is equal 0, after OTP\_LOCK is programmed with 1 by WRSR command, the OTP sector is protected from program and erase operation. The OTP\_LOCK bit can only be programmed once.

#### Write Status Register (WRSR) (01h)

The Write Status Register (WRSR) instruction allows new values to be written to the Status Register. Before it can be accepted, a Write Enable (WREN) instruction must previously have been executed. After the Write Enable (WREN) instruction has been decoded and executed, the device sets the Write Enable Latch (WEL).

The Write Status Register (WRSR) instruction is entered by driving Chip Select (CS#) Low, followed by the instruction code and the data byte on Serial Data Input (DI).

The instruction sequence is shown in Figure 11. The Write Status Register (WRSR) instruction has no effect on S1 and S0 of the Status Register. Chip Select (CS#) must be driven High after the eighth bit of the data byte has been latched in. If not, the Write Status Register (WRSR) instruction is not executed. As soon as Chip Select (CS#) is driven High, the self-timed Write Status Register cycle (whose duration is  $t_W$ ) is initiated. While the Write Status Register cycle is in progress, the Status Register may still be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Write Status Register cycle, and is 0 when it is completed. When the cycle is completed, the Write Enable Latch (WEL) is reset.

The Write Status Register (WRSR) instruction allows the user to change the values of the Block Protect (BP3, BP2, BP1, BP0) bits, to define the size of the area that is to be treated as read-only, as defined in Table 3. The Write Status Register (WRSR) instruction also allows the user to set or reset the Status Register Protect (SRP) bit in accordance with the Write Protect (WP#) signal. The Status Register Protect (SRP) bit and Write Protect (WP#) signal allow the device to be put in the Hardware Protected Mode (HPM). The Write Status Register (WRSR) instruction is not executed once the Hardware Protected Mode (HPM) is entered.

The instruction sequence is shown in Figure 11.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.

#### NOTE :

In the OTP mode, WRSR command is used to program OTP\_LOCK bit, TB bit, 4KB BL bit and EBL bit to '1', but these bits only can be programmed once.



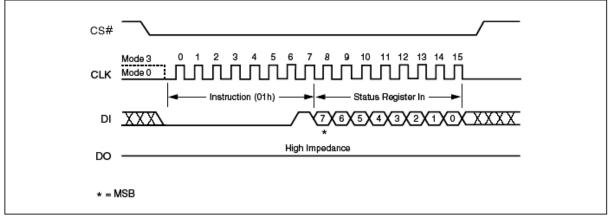


Figure 11. Write Status Register Instruction Sequence Diagram

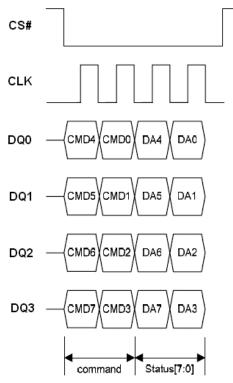


Figure 11.1 Write Status Register Instruction Sequence in QPI Mode



### Read Data Bytes (READ) (03h)

The device is first selected by driving Chip Select (CS#) Low. The instruction code for the Read Data Bytes (READ) instruction is followed by a 3-byte address (A23-A0), each bit being latched-in during the rising edge of Serial Clock (CLK). Then the memory contents, at that address, is shifted out on Serial Data Output (DO), each bit being shifted out, at a maximum frequency  $f_R$ , during the falling edge of Serial Clock (CLK).

The instruction sequence is shown in Figure 12. The first byte addresses can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. The whole memory can, therefore, be read with a single Read Data Bytes (READ) instruction. When the highest address is reached, the address counter rolls over to 000000h, allowing the read sequence to be continued indefinitely.

The Read Data Bytes (READ) instruction is terminated by driving Chip Select (CS#) High. Chip Select (CS#) can be driven High at any time during data output. Any Read Data Bytes (READ) instruction, while an Erase, Program or Write cycle is in progress, is rejected without having any effects on the cycle that is in progress.

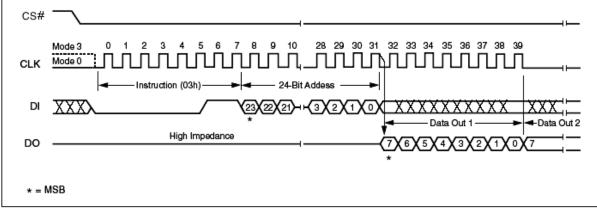


Figure 12. Read Data Instruction Sequence Diagram



### Read Data Bytes at Higher Speed (FAST\_READ) (0Bh)

The device is first selected by driving Chip Select (CS#) Low. The instruction code for the Read Data Bytes at Higher Speed (FAST\_READ) instruction is followed by a 3-byte address (A23-A0) and a dummy byte, each bit being latched-in during the rising edge of Serial Clock (CLK). Then the memory contents, at that address, is shifted out on Serial Data Output (DO), each bit being shifted out, at a maximum frequency  $F_R$ , during the falling edge of Serial Clock (CLK).

The instruction sequence is shown in Figure 13. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. The whole memory can, therefore, be read with a single Read Data Bytes at Higher Speed (FAST\_READ) instruction. When the highest address is reached, the address counter rolls over to 000000h, allowing the read sequence to be continued indefinitely.

The Read Data Bytes at Higher Speed (FAST\_READ) instruction is terminated by driving Chip Select (CS#) High. Chip Select (CS#) can be driven High at any time during data output. Any Read Data Bytes at Higher Speed (FAST\_READ) instruction, while an Erase, Program or Write cycle is in progress, is rejected without having any effects on the cycle that is in progress.

The instruction sequence is shown in Figure 13.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.

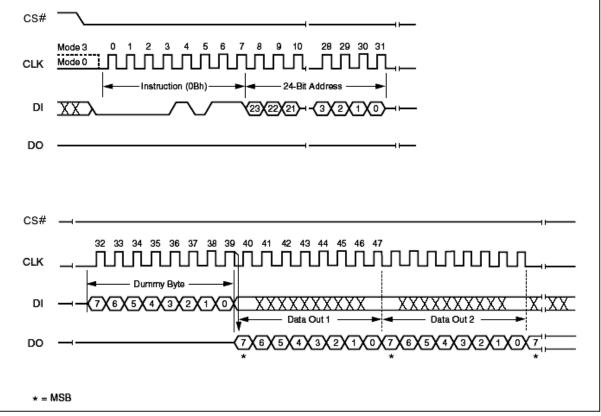


Figure 13. Fast Read Instruction Sequence Diagram

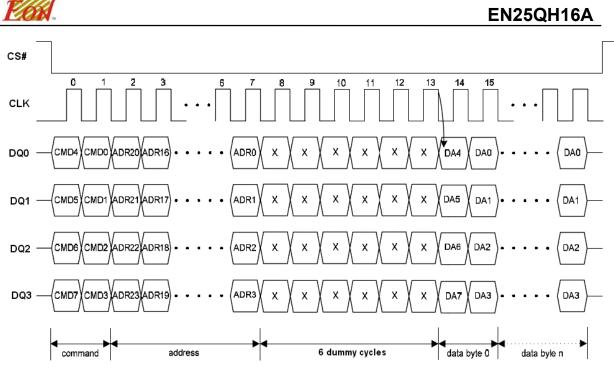


Figure 13.1 Fast Read Instruction Sequence in QPI Mode

### Dual Output Fast Read (3Bh)

The Dual Output Fast Read (3Bh) is similar to the standard Fast Read (0Bh) instruction except that data is output on two pins,  $DQ_0$  and  $DQ_1$ , instead of just  $DQ_0$ . This allows data to be transferred from the EN25QH16A at twice the rate of standard SPI devices. The Dual Output Fast Read instruction is ideal for quickly downloading code from to RAM upon power-up or for applications that cache code-segments to RAM for execution.

Similar to the Fast Read instruction, the Dual Output Fast Read instruction can operation at the highest possible frequency of FR (see AC Electrical Characteristics). This is accomplished by adding eight "dummy clocks after the 24-bit address as shown in Figure 14. The dummy clocks allow the device's internal circuits additional time for setting up the initial address. The input data during the dummy clock is "don't care". However, the DI pin should be high-impedance prior to the falling edge of the first data out clock.



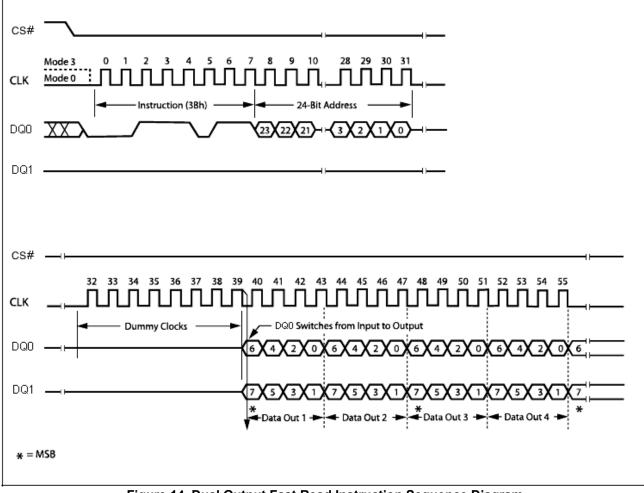


Figure 14. Dual Output Fast Read Instruction Sequence Diagram

### Dual Input / Output FAST\_READ (BBh)

The Dual I/O Fast Read (BBh) instruction allows for improved random access while maintaining two IO pins,  $DQ_0$  and  $DQ_1$ . It is similar to the Dual Output Fast Read (3Bh) instruction but with the capability to input the Address bits (A23-A0) two bits per clock. This reduced instruction overhead may allow for code execution (XIP) directly from the Dual SPI in some applications.

The Dual I/O Fast Read instruction enable double throughput of Serial Flash in read mode. The address is latched on rising edge of CLK, and data of every two bits (interleave 2 I/O pins) shift out on the falling edge of CLK at a maximum frequency. The first address can be at any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single Dual I/O Fast Read instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing Dual I/O Fast Read instruction, the following address/dummy/data out will perform as 2-bit instead of previous 1-bit, as shown in Figure 15.



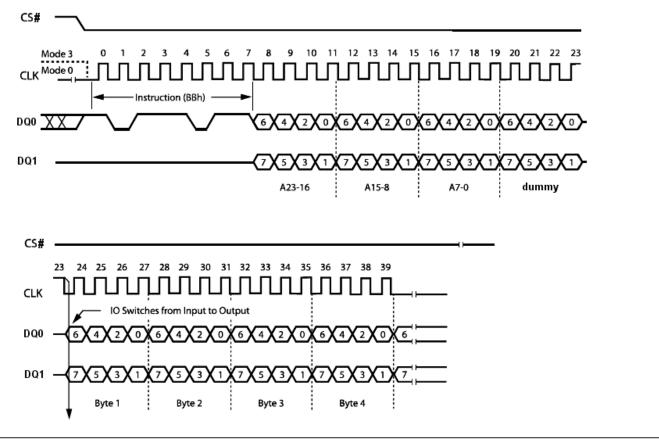


Figure 15. Dual Input / Output Fast Read Instruction Sequence Diagram



### Quad Input / Output FAST\_READ (EBh)

The Quad Input/Output FAST\_READ (EBh) instruction is similar to the Dual I/O Fast Read (BBh) instruction except that address and data bits are input and output through four pins,  $DQ_0$ ,  $DQ_1$ ,  $DQ_2$  and  $DQ_3$  and six dummy clocks are required prior to the data output. The Quad I/O dramatically reduces instruction overhead allowing faster random access for code execution (XIP) directly from the Quad SPI.

The Quad Input/Output FAST\_READ (EBh) instruction enable quad throughput of Serial Flash in read mode. The address is latching on rising edge of CLK, and data of every four bits (interleave on 4 I/O pins) shift our on the falling edge of CLK at a maximum frequency  $F_R$ . The first address can be any location. The address is automatically increased to the next higher address after each byte data is shifted out, so the whole memory can be read out at a single Quad Input/Output FAST\_READ instruction. The address counter rolls over to 0 when the highest address has been reached. Once writing Quad Input/Output FAST\_READ instruction, the following address/dummy/data out will perform as 4-bit instead of previous 1-bit.

The sequence of issuing Quad Input/Output FAST\_READ (EBh) instruction is: CS# goes low -> sending Quad Input/Output FAST\_READ (EBh) instruction -> 24-bit address interleave on DQ<sub>3</sub>, DQ<sub>2</sub>, DQ<sub>1</sub> and DQ<sub>0</sub> -> 6 dummy cycles -> data out interleave on DQ<sub>3</sub>, DQ<sub>2</sub>, DQ<sub>1</sub> and DQ<sub>0</sub> -> to end Quad Input/Output FAST\_READ (EBh) operation can use CS# to high at any time during data out, as shown in Figure 16.

The instruction sequence is shown in Figure 16.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.

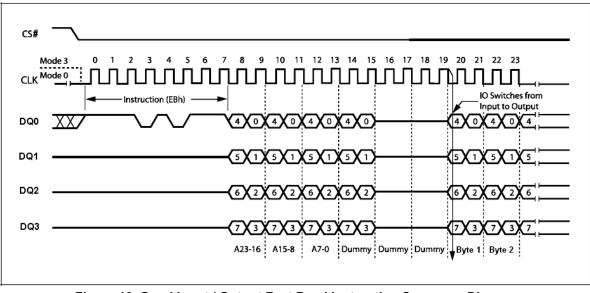


Figure 16. Quad Input / Output Fast Read Instruction Sequence Diagram



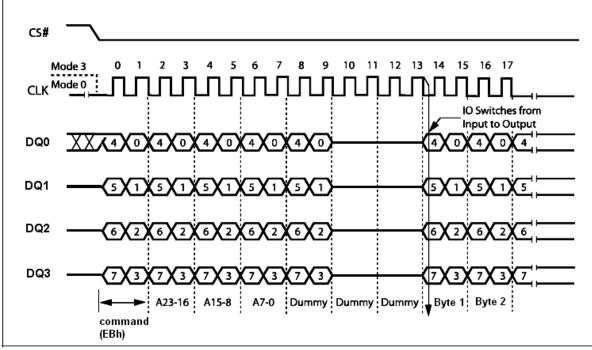


Figure 16.1. Quad Input / Output Fast Read Instruction Sequence in QPI Mode

Another sequence of issuing Quad Input/Output FAST\_READ (EBh) instruction especially useful in random access is : CS# goes low -> sending Quad Input/Output FAST\_READ (EBh) instruction -> 24-bit address interleave on DQ<sub>3</sub>, DQ<sub>2</sub>, DQ<sub>1</sub> and DQ<sub>0</sub> -> performance enhance toggling bit P[7:0] -> 4 dummy cycles -> data out interleave on DQ<sub>3</sub>, DQ<sub>2</sub>, DQ<sub>1</sub> and DQ<sub>0</sub> till CS# goes high -> CS# goes low (reduce Quad Input/Output FAST\_READ (EBh) instruction) -> 24-bit access address, as shown in Figure 17.

In the performance – enhancing mode, P[7:4] must be toggling with P[3:0] ; likewise P[7:0] = A5h, 5Ah, F0h or 0Fh can make this mode continue and reduce the next Quad Input/Output FAST\_READ (EBh) instruction. Once P[7:4] is no longer toggling with P[3:0] ; likewise P[7:0] = FFh, 00h, AAh or 55h. And afterwards CS# is raised, the system then will escape from performance enhance mode and return to normal operation.

While Program/ Erase/ Write Status Register is in progress, Quad Input/Output FAST\_READ (EBh) instruction is rejected without impact on the Program/ Erase/ Write Status Register current cycle.

The instruction sequence is shown in Figure 17.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.



## EN25QH16A


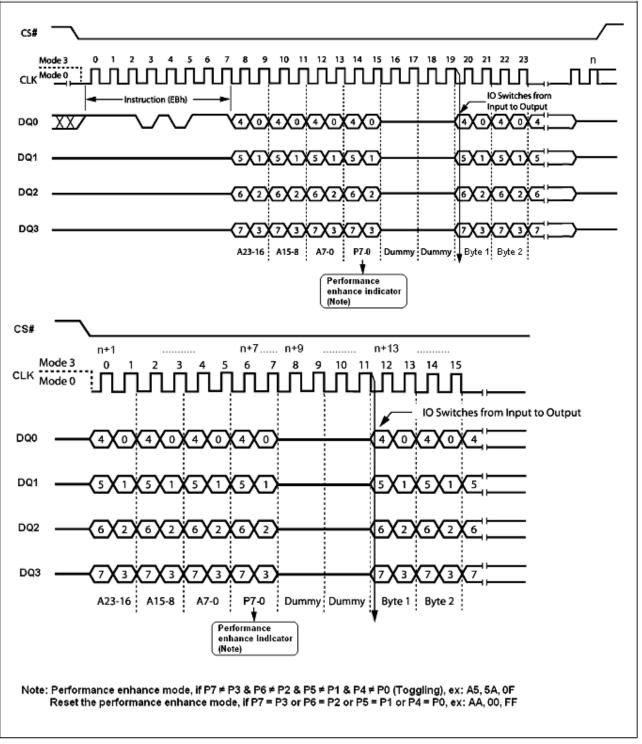


Figure 17. Quad Input/Output Fast Read Enhance Performance Mode Sequence Diagram



# EN25QH16A



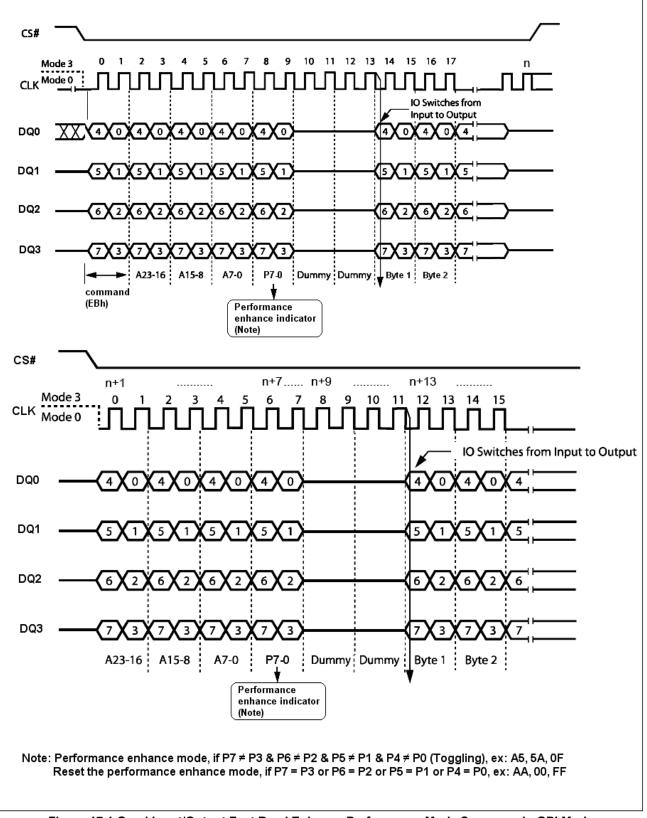





#### Page Program (PP) (02h)

The Page Program (PP) instruction allows bytes to be programmed in the memory. Before it can be accepted, a Write Enable (WREN) instruction must previously have been executed. After the Write Enable (WREN) instruction has been decoded, the device sets the Write Enable Latch (WEL).

The Page Program (PP) instruction is entered by driving Chip Select (CS#) Low, followed by the instruction code, three address bytes and at least one data byte on Serial Data Input (DI). If the 8 least significant address bits (A7-A0) are not all zero, all transmitted data that goes beyond the end of the current page are programmed from the start address of the same page (from the address whose 8 least significant bits (A7-A0) are all zero). Chip Select (CS#) must be driven Low for the entire duration of the sequence.

The instruction sequence is shown in Figure 18. If more than 256 bytes are sent to the device, previously latched data are discarded and the last 256 data bytes are guaranteed to be programmed correctly within the same page. If less than 256 Data bytes are sent to device, they are correctly programmed at the requested addresses without having any effects on the other bytes of the same page.

Chip Select (CS#) must be driven High after the eighth bit of the last data byte has been latched in, otherwise the Page Program (PP) instruction is not executed.

As soon as Chip Select (CS#) is driven High, the self-timed Page Program cycle (whose duration is  $t_{PP}$ ) is initiated. While the Page Program cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Page Program cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch (WEL) bit is reset.

A Page Program (PP) instruction applied to a page which is protected by the Block Protect (BP3, BP2, BP1, BP0) bits (see Table 3) is not executed.

The instruction sequence is shown in Figure 18.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.

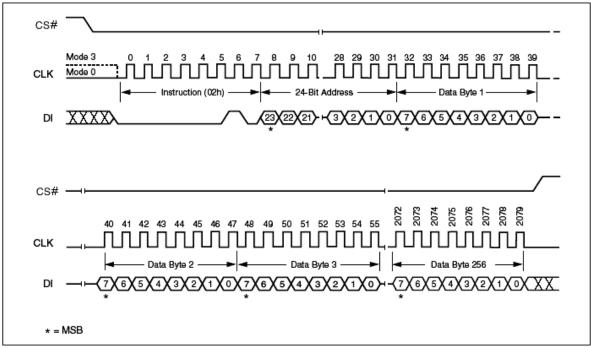


Figure 18. Page Program Instruction Sequence Diagram



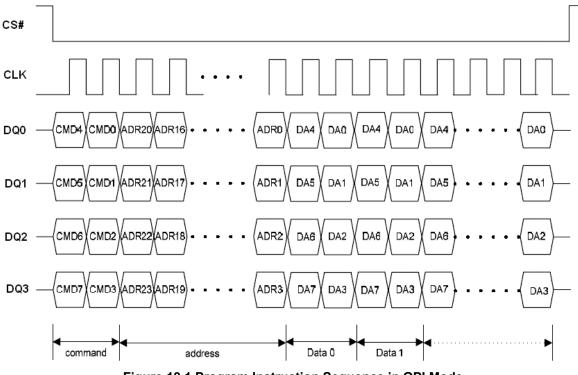


Figure 18.1 Program Instruction Sequence in QPI Mode

### Quad Input Page Program (QPP) (32h)

The Quad Page Program (QPP) instruction allows up to 256 bytes of data to be programmed at previously erased (FFh) memory locations using four pins:  $DQ_0$ ,  $DQ_1$ ,  $DQ_2$  and  $DQ_3$ . The Quad Page Program can improve performance for PROM Programmer and applications that have slow clock speeds < 5MHz. Systems with faster clock speed will not realize much benefit for the Quad Page Program instruction since the inherent page program time is much greater than the time it take to clock-in the data.

To use Quad Page Program (QPP) the WP# & Hold# Disable (WHDIS) bit in Status Register must be set to 1. A Write Enable instruction must be executed before the device will accept the Quad Page Program (QPP) instruction (S1, WEL=1). The instruction is initiated by driving the CS# pin low then shifting the instruction code "32h" followed by a 24-bit address (A23-A0) and at least one data byte, into the IO pins. The CS# pin must be held low for the entire length of the instruction while data is being sent to the device. All other functions of Quad Page Program (QPP) are identical to standard Page Program. The Quad Page Program (QPP) instruction sequence is shown in Figure 19.



# EN25QH16A

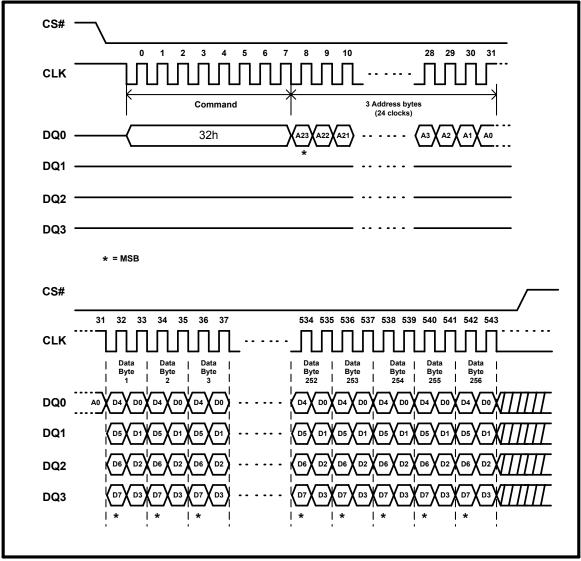


Figure 19. Quad Input Page Program Instruction Sequence Diagram (SPI Mode only)

### Sector Erase (SE) (20h)

The Sector Erase (SE) instruction sets to 1 (FFh) all bits inside the chosen sector. Before it can be accepted, a Write Enable (WREN) instruction must previously have been executed. After the Write Enable (WREN) instruction has been decoded, the device sets the Write Enable Latch (WEL).

The Sector Erase (SE) instruction is entered by driving Chip Select (CS#) Low, followed by the instruction code, and three address bytes on Serial Data Input (DI). Any address inside the Sector (see Table 2) is a valid address for the Sector Erase (SE) instruction. Chip Select (CS#) must be driven Low for the entire duration of the sequence.

The instruction sequence is shown in Figure 20. Chip Select (CS#) must be driven High after the eighth bit of the last address byte has been latched in, otherwise the Sector Erase (SE) instruction is not executed. As soon as Chip Select (CS#) is driven High, the self-timed Sector Erase cycle (whose duration is  $t_{SE}$ ) is initiated. While the Sector Erase cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the



self-timed Sector Erase cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch (WEL) bit is reset.

A Sector Erase (SE) instruction applied to a sector which is protected by the Block Protect (BP3, BP2, BP1, BP0) bits (see Table 3) is not executed.

The instruction sequence is shown in Figure 22.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.

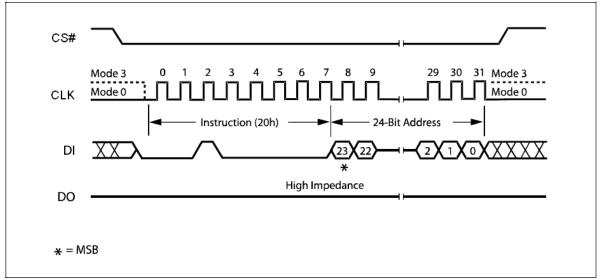


Figure 20. Sector Erase Instruction Sequence Diagram

### 32KB Half Block Erase (HBE) (52h)

The Half Block Erase (HBE) instruction sets to 1 (FFh) all bits inside the chosen block. Before it can be accepted, a Write Enable (WREN) instruction must previously have been executed. After the Write Enable (WREN) instruction has been decoded, the device sets the Write Enable Latch (WEL).

The Half Block Erase (HBE) instruction is entered by driving Chip Select (CS#) Low, followed by the instruction code, and three address bytes on Serial Data Input (DI). Any address inside the Block (see Table 2) is a valid address for the Half Block Erase (HBE) instruction. Chip Select (CS#) must be driven Low for the entire duration of the sequence.

The instruction sequence is shown in Figure 21. Chip Select (CS#) must be driven High after the eighth bit of the last address byte has been latched in, otherwise the Half Block Erase (HBE) instruction is not executed. As soon as Chip Select (CS#) is driven High, the self-timed Half Block Erase cycle (whose duration is  $t_{HBE}$ ) is initiated. While the Block Erase cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Half Block Erase cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch (WEL) bit is reset.

A Half Block Erase (HBE) instruction applied to a block which is protected by the Block Protect (BP3, BP2, BP1, BP0) bits (see Table 3) is not executed.

The instruction sequence is shown in Figure 22.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.



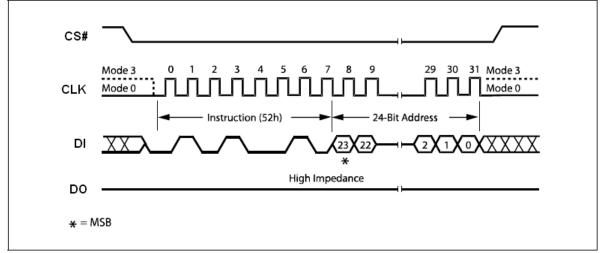


Figure 21. 32KB Half Block Erase Instruction Sequence Diagram

## 64KB Block Erase (BE) (D8h)

The Block Erase (BE) instruction sets to 1 (FFh) all bits inside the chosen block. Before it can be accepted, a Write Enable (WREN) instruction must previously have been executed. After the Write Enable (WREN) instruction has been decoded, the device sets the Write Enable Latch (WEL).

The Block Erase (BE) instruction is entered by driving Chip Select (CS#) Low, followed by the instruction code, and three address bytes on Serial Data Input (DI). Any address inside the Block (see Table 2) is a valid address for the Block Erase (BE) instruction. Chip Select (CS#) must be driven Low for the entire duration of the sequence.

The instruction sequence is shown in Figure 22. Chip Select (CS#) must be driven High after the eighth bit of the last address byte has been latched in, otherwise the Block Erase (BE) instruction is not executed. As soon as Chip Select (CS#) is driven High, the self-timed Block Erase cycle (whose duration is  $t_{BE}$ ) is initiated. While the Block Erase cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Block Erase cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch (WEL) bit is reset.

A Block Erase (BE) instruction applied to a block which is protected by the Block Protect (BP3, BP2, BP1, BP0) bits (see Table 3) is not executed.

The instruction sequence is shown in Figure 22.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.



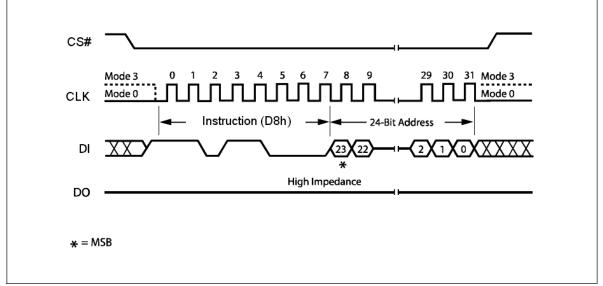


Figure 22. 64KB Block Erase Instruction Sequence Diagram

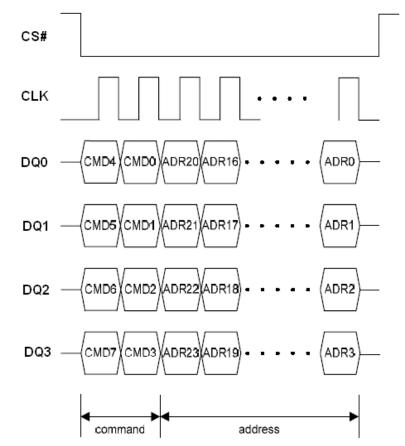


Figure 22.1 Half Block/Block/Sector Erase Instruction Sequence in QPI Mode





#### Chip Erase (CE) (C7h/60h)

The Chip Erase (CE) instruction sets all bits to 1 (FFh). Before it can be accepted, a Write Enable (WREN) instruction must previously have been executed. After the Write Enable (WREN) instruction has been decoded, the device sets the Write Enable Latch (WEL).

The Chip Erase (CE) instruction is entered by driving Chip Select (CS#) Low, followed by the instruction code on Serial Data Input (DI). Chip Select (CS#) must be driven Low for the entire duration of the sequence.

The instruction sequence is shown in Figure 23. Chip Select (CS#) must be driven High after the eighth bit of the instruction code has been latched in, otherwise the Chip Erase instruction is not executed. As soon as Chip Select (CS#) is driven High, the self-timed Chip Erase cycle (whose duration is  $t_{CE}$ ) is initiated. While the Chip Erase cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Chip Erase cycle, and is 0 when it is completed. At some unspecified time before the cycle is completed, the Write Enable Latch (WEL) bit is reset.

The Chip Erase (CE) instruction is executed only if all Block Protect (BP3, BP2, BP1, BP0) bits are 0. The Chip Erase (CE) instruction is ignored if one, or more blocks are protected.

The instruction sequence is shown in Figure 23.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.

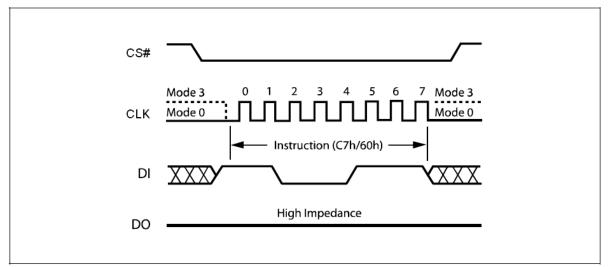


Figure 23. Chip Erase Instruction Sequence Diagram



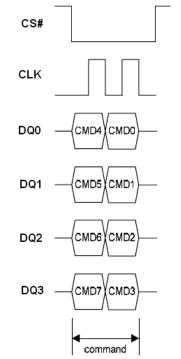


Figure 23.1 Chip Erase Sequence in QPI Mode

#### Deep Power-down (DP) (B9h)

Executing the Deep Power-down (DP) instruction is the only way to put the device in the lowest consumption mode (the Deep Power-down mode). It can also be used as an extra software protection mechanism, while the device is not in active use, since in this mode, the device ignores all Write, Program and Erase instructions.

Driving Chip Select (CS#) High deselects the device, and puts the device in the Standby mode (if there is no internal cycle currently in progress). But this mode is not the Deep Power-down mode. The Deep Power-down mode can only be entered by executing the Deep Power-down (DP) instruction, to reduce the standby current (from  $I_{CC1}$  to  $I_{CC2}$ , as specified in Table 13.)

Once the device has entered the Deep Power-down mode, all instructions are ignored except the Release from Deep Power-down and Read Device ID (RDI) instruction. This releases the device from this mode. The Release from Deep Power-down and Read Device ID (RDI) instruction also allows the Device ID of the device to be output on Serial Data Output (DO).

The Deep Power-down mode automatically stops at Power-down, and the device always Powers-up in the Standby mode. The Deep Power-down (DP) instruction is entered by driving Chip Select (CS#) Low, followed by the instruction code on Serial Data Input (DI). Chip Select (CS#) must be driven Low for the entire duration of the sequence.

The instruction sequence is shown in Figure 24. Chip Select (CS#) must be driven High after the eighth bit of the instruction code has been latched in, otherwise the Deep Power-down (DP) instruction is not executed. As soon as Chip Select (CS#) is driven High, it requires a delay of  $t_{DP}$  before the supply current is reduced to  $I_{CC2}$  and the Deep Power-down mode is entered.

Any Deep Power-down (DP) instruction, while an Erase, Program or Write cycle is in progress, is rejected without having any effects on the cycle that is in progress.





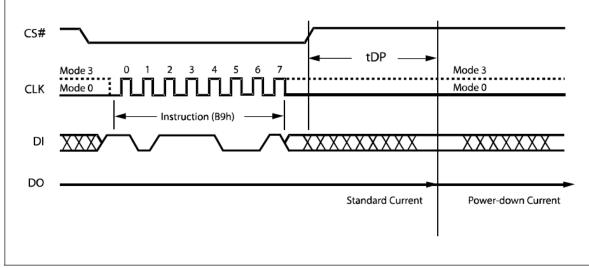


Figure 24. Deep Power-down Instruction Sequence Diagram

#### Release from Deep Power-down and Read Device ID (RDI)

Once the device has entered the Deep Power-down mode, all instructions are ignored except the Release from Deep Power-down and Read Device ID (RDI) instruction. Executing this instruction takes the device out of the Deep Power-down mode.

Please note that this is not the same as, or even a subset of, the JEDEC 16-bit Electronic Signature that is read by the Read Identifier (RDID) instruction. The old-style Electronic Signature is supported for reasons of backward compatibility, only, and should not be used for new designs. New designs should, instead, make use of the JEDEC 16-bit Electronic Signature, and the Read Identifier (RDID) instruction.

When used only to release the device from the power-down state, the instruction is issued by driving the CS# pin low, shifting the instruction code "ABh" and driving CS# high as shown in Figure 25. After the time duration of  $t_{RES1}$  (See AC Characteristics) the device will resume normal operation and other instructions will be accepted. The CS# pin must remain high during the  $t_{RES1}$  time duration.

When used only to obtain the Device ID while not in the power-down state, the instruction is initiated by driving the CS# pin low and shifting the instruction code "ABh" followed by 3-dummy bytes. The Device ID bits are then shifted out on the falling edge of CLK with most significant bit (MSB) first as shown in Figure 26. The Device ID value for the EN25QH16A are listed in Table 6. The Device ID can be read continuously. The instruction is completed by driving CS# high.

When Chip Select (CS#) is driven High, the device is put in the Stand-by Power mode. If the device was not previously in the Deep Power-down mode, the transition to the Stand-by Power mode is immediate. If the device was previously in the Deep Power-down mode, though, the transition to the Standby Power mode is delayed by  $t_{RES2}$ , and Chip Select (CS#) must remain High for at least  $t_{RES2}$ 

(max), as specified in Table 15. Once in the Stand-by Power mode, the device waits to be selected, so that it can receive, decode and execute instructions.

Except while an Erase, Program or Write Status Register cycle is in progress, the Release from Deep Power-down and Read Device ID (RDI) instruction always provides access to the 8bit Device ID of the device, and can be applied even if the Deep Power-down mode has not been entered.

Any Release from Deep Power-down and Read Device ID (RDI) instruction while an Erase, Program or Write Status Register cycle is in progress, is not decoded, and has no effect on the cycle that is in progress.



# EN25QH16A

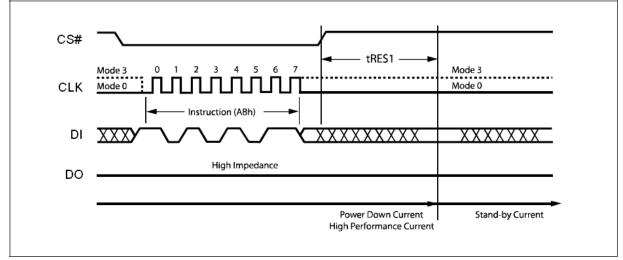


Figure 25. Release Power-down Instruction Sequence Diagram

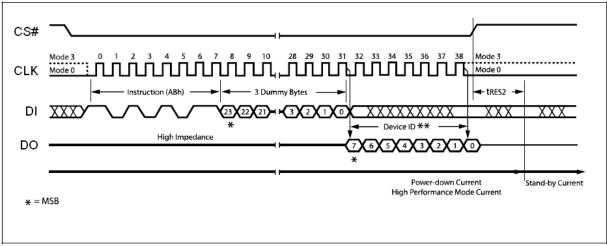


Figure 26. Release Power-down / Device ID Instruction Sequence Diagram

#### Read Manufacturer / Device ID (90h)

The Read Manufacturer/Device ID instruction is an alternative to the Release from Power-down / Device ID instruction that provides both the JEDEC assigned manufacturer ID and the specific device ID.

The Read Manufacturer/Device ID instruction is very similar to the Release from Power-down / Device ID instruction. The instruction is initiated by driving the CS# pin low and shifting the instruction code "90h" followed by a 24-bit address of 000000h. After which, the Manufacturer ID for Eon (1Ch) and the Device ID are shifted out on the falling edge of CLK with most significant bit (MSB) first as shown in Figure 27. The Device ID values for the EN25QH16A are listed in Table 6. If the 24-bit address is initially set to 000001h the Device ID will be read first

The instruction sequence is shown in Figure 27.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.



# EN25QH16A


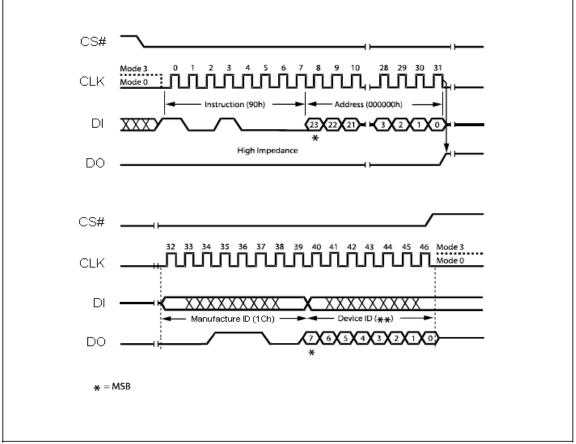


Figure 27. Read Manufacturer / Device ID Diagram



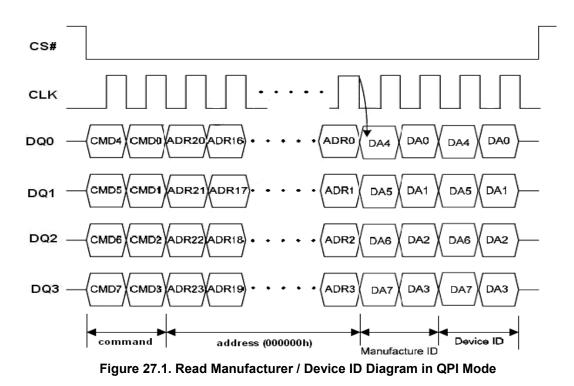

#### Read Identification (RDID) (9Fh)

The Read Identification (RDID) instruction allows the 8-bit manufacturer identification to be read, followed by two bytes of device identification. The device identification indicates the memory type in the first byte , and the memory capacity of the device in the second byte .

Any Read Identification (RDID) instruction while an Erase or Program cycle is in progress, is not decoded, and has no effect on the cycle that is in progress. The Read Identification (RDID) instruction should not be issued while the device is in Deep Power down mode.

The device is first selected by driving Chip Select Low. Then, the 8-bit instruction code for the instruction is shifted in. This is followed by the 24-bit device identification, stored in the memory, being shifted out on Serial Data Output, each bit being shifted out during the falling edge of Serial Clock. The instruction sequence is shown in Figure 28. The Read Identification (RDID) instruction is terminated by driving Chip Select High at any time during data output.

When Chip Select is driven High, the device is put in the Standby Power mode. Once in the Standby Power mode, the device waits to be selected, so that it can receive, decode and execute instructions.

The instruction sequence is shown in Figure 28.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.

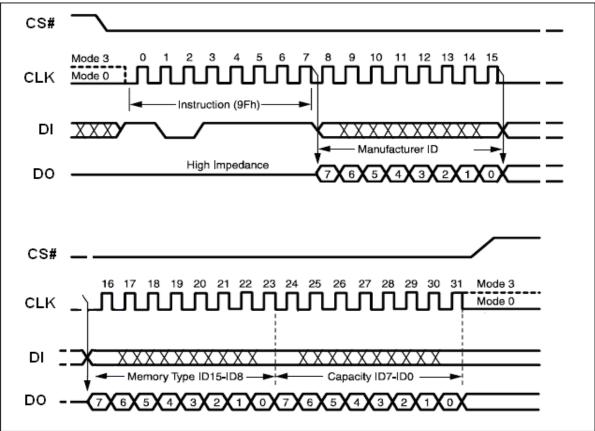


Figure 28. Read Identification (RDID)

# EN25QH16A



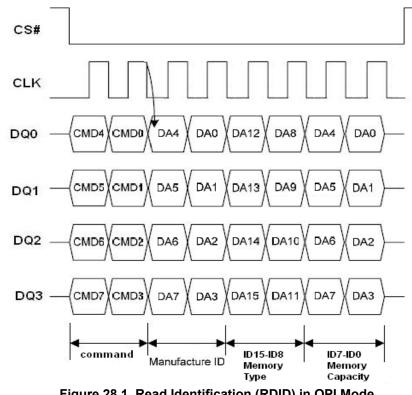


Figure 28.1. Read Identification (RDID) in QPI Mode

#### Enter OTP mode (3Ah)

This Flash support OTP mode to enhance the data protection, user can use the Enter OTP mode (3Ah) command for entering this mode. In OTP mode, the Status Register S7 bit is served as OTP\_LOCK bit; S6 bit is served as TB bit; S4 bit is served as 4KB BL bit, S3 bit is served as EBL bit, S1 bit is served as WEL bit and S0 bit is served as WIP bit. They can be read by RDSR command.

This Flash has an extra 512 bytes OTP sector, user must issue Enter OTP mode command to read, program or erase OTP sector. After entering OTP mode, the OTP sector is mapping to sector 511, SRP bit becomes OTP LOCK bit. The Chip Erase, Block Erase and Half Block Erase commands are also disabled.

In OTP mode, user can read other sectors, but program/erase OTP sector only allowed when OTP LOCK bit equal to '0'. The OTP sector can only be erased by Sector Erase (20h) command.

Sector	Sector Size	Address Range
511	512 byte	1FF000h – 1FF1FFh


Table 8. OTP Sector Address

Note: The OTP sector is mapping to sector 511.

The Enable Boot Lock feature is configured in OTP mode. It enables user to lock the 64KB-Block/Sector on the top/bottom of the device for protection. This feature is activated by programming the EBL bit to '1'. WRSR command is used to program OTP LOCK bit, TB bit, 4KB BL bit and EBL bit to '1', but these bits only can be programmed once. User can use WRDI (04h) command to exit OTP mode.

The instruction sequence is shown in Figure 29.1 while using the Enable Quad Peripheral Interface mode (EQPI) (38h) command.



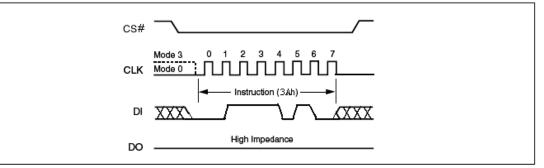



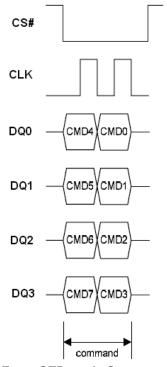


Figure 29.1 Enter OTP mode Sequence in QPI Mode



#### Read SFDP Mode and Unique ID Number (5Ah)

#### **Read SFDP Mode**

EN25QH16A features Serial Flash Discoverable Parameters (SFDP) mode. Host system can retrieve the operating characteristics, structure and vendor specified information such as identifying information, memory size, operating voltage and timing information of this device by SFDP mode.

The device is first selected by driving Chip Select (CS#) Low. The instruction code for the Read SFDP Mode is followed by a 3-byte address (A23-A0) and a dummy byte, each bit being latched-in during the rising edge of Serial Clock (CLK). Then the memory contents, at that address, is shifted out on Serial Data Output (DO), each bit being shifted out, at a maximum frequency FR, during the falling edge of Serial Clock (CLK).

The instruction sequence is shown in Figure 30. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. The whole memory can, therefore, be read with a single Serial Flash Discoverable Parameters (SFDP) instruction. When the highest address is reached, the address counter rolls over to 0x00h, allowing the read sequence to be continued indefinitely. The Serial Flash Discoverable Parameters (SFDP) instruction is terminated by driving Chip Select (CS#) High. Chip Select (CS#) can be driven High at any time during data output. Any Read Data Bytes at Serial Flash Discoverable Parameters (SFDP) instruction, while an Erase, Program or Write cycle is in progress, is rejected without having any effects on the cycle that is in progress.

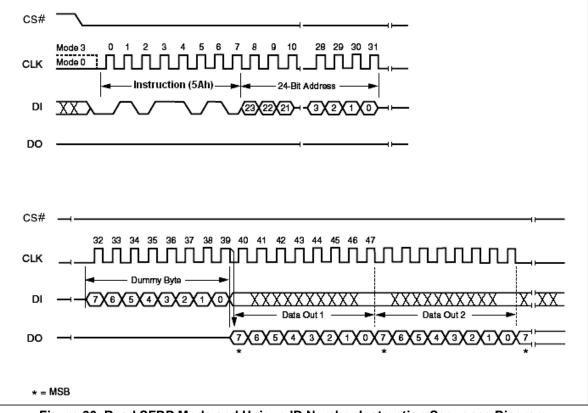


Figure 30. Read SFDP Mode and Unique ID Number Instruction Sequence Diagram



# Table 9. Serial Flash Discoverable Parameters (SFDP) Signature and Parameter Identification Data Value (Advanced Information)

Description	Address (h) (Byte Mode)	Address (Bit)	Data	Comment
	00h	07:00	53h	
SEDD Signatura	01h	15 : 08	46h	Signature [31:0]:
SFDP Signature	02h	23 : 16	44h	Hex: 50444653
	03h	31 : 24	50h	
SFDP Minor Revision Number	04h	07:00	00h	Star from 0x00
SFDP Major Revision Number	05h	15 : 08	01h	Star from 0x01
Number of Parameter Headers (NPH)	06h	23 : 16	00h	1 parameter header
Unused	07h	31 : 24	FFh	Reserved
ID Number	08h	07:00	00h	JEDEC ID
Parameter Table Minor Revision Number	09h	15 : 08	00h	Star from 0x00
Parameter Table Major Revision Number	0Ah	23 : 16	01h	Star from 0x01
Parameter Table Length (in DW)	0Bh	31 : 24	09h	9 DWORDs
	0Ch	07:00	30h	
Parameter Table Pointer (PTP)	0Dh	15 : 08	00h	000030h
. ,	0Eh	23 : 16	00h	
Unused	0Fh	31 : 24	FFh	Reserved

## Table 10. Parameter ID (0) (Advanced Information) 1/9



# EN25QH16A

Description	Address (h) (Byte Mode)	Address (Bit)	Data	Comment
Block / Sector Erase sizes Identifies the erase granularity for all Flash		00	01b	00 = reserved 01 = 4KB erase
Components		01		10 = reserved 11 = 64KB erase
Write Granularity		02	1b	0 = No, 1 = Yes
Write Enable Instruction Required for Writing to Volatile Status Register	30h	03		00 = N/A
Write Enable Opcode Select for Writing to Volatile Status Register		04	00b	01 = use 50h opcode 11 = use 06h opcode
		05		
Jnused		06	111b	Reserved
		07		
		08		
		09		
		10		
4 Kilo Puto Eroso Oncodo	le 31h	11	206	4 KB Erase Support
4 Kilo-Byte Erase Opcode		12	20h	(FFh = not supported)
		13		
		14		
		15		
Supports (1-1-2) Fast Read Device supports single input opcode & address and dual output data Fast Read		16	1b	0 = not supported 1 = supported
Address Byte		17		00 = 3-Byte 01 = 3- or 4-Byte (e.g. defaults to 3-Byte
Number of bytes used in addressing for flash array read, write and erase.			18	00b
Supports Double Transfer Rate (DTR) Clocking Indicates the device supports some type of double transfer rate clocking.	32h	19	0b	0 = not supported 1 = supported
Supports (1-2-2) Fast Read Device supports single input opcode, dual input address, and dual output data Fast Read		20	1b	0 = not supported 1 = supported
Supports (1-4-4) Fast Read Device supports single input opcode, quad input address, and quad output data Fast Read		21	1b	0 = not supported 1 = supported
Supports (1-1-4) Fast Read Device supports single input opcode & address and quad output data Fast Read		22	Ob	0 = not supported 1 = supported
Unused		23	1b	Reserved
		24		
		25		
		26	1	
		27		
Unused	33h	28	FFh	Reserved
		20	1	
		30		
		31		<u> </u>

#### Table 10. Parameter ID (0) (Advanced Information) 2/9

This Data Sheet may be revised by subsequent versions49Elite Semiconductor Memory Technology Inc.or modifications due to changes in technical specifications.49



Description	Address (h) (Byte Mode)	Address (Bit)	Data	Comment
Flash Memory Density	37h : 34h	31:00	00FFFFFFh	16 Mbits

# Table 10. Parameter ID (0) (Advanced Information) 3/9

Description	Address (h) (Byte Mode)	Address (Bit)	Data	Comment
		00		
(1-4-4) Fast Read Number of Wait states		01		
(dummy clocks) needed before valid		02	00100b	4 dummy clocks
output	38h	03		
	0011	04		
Quad Input Address Quad Output (1-4-		05	_	
4) Fast Read Number of Mode Bits		06	010b	8 mode bits
The ast read number of mode Dits		07		
(1-4-4) Fast Read Opcode	39h -	08		
		09	EBh	
		10		
		11		
Opcode for single input opcode, quad input address, and quad output data Fast Read.		12		
address, and quad output data i ast iteau.		13		
		14		
		15		
		16	-	
(1-1-4) Fast Read Number of Wait states		17		
(dummy clocks) needed before valid		18	00000b	Not Supported
output	0.4 h	19		
	3Ah	20		
		21		
(1-1-4) Fast Read Number of Mode Bits		22	000b	Not Supported
		23		
(1-1-4) Fast Read Opcode Opcode for single input opcode & address and quad output data Fast Read.	3Bh	31 : 24	FFh	Not Supported



#### Table 10. Parameter ID (0) (Advanced Information) 4/9

Description	Address (h) (Byte Mode)	Address (Bit)	Data	Comment
		00		
(1-1-2) Fast Read Number of Wait states		01		
(dummy clocks) needed before valid		02	01000b	8 dummy clocks
output	3Ch	03		
	3011	04		
(1-1-2) Fast Read Number of Mode Bits		05		
		06	000b	Not Supported
		07		
(1-1-2) Fast Read Opcode Opcode for single input opcode & address and dual output data Fast Read.	3Dh	15 : 08	3Bh	
		16		
(1-2-2) Fast Read Number of Wait states		17	00100b	4 dummy clocks
(dummy clocks) needed before valid		18		
output	3Eh	19		
	361	20		
		21		
(1-2-2) Fast Read Number of Mode Bits		22	000b	Not Supported
		23		
(1-2-2) Fast Read Opcode Opcode for single input opcode, dual input address, and dual output data Fast Read.	3Fh	31 : 24	BBh	

## Table 10. Parameter ID (0) (Advanced Information) 5/9

Description	Address (h) (Byte Mode)	Address (Bit)	Data	Comment
Supports (2-2-2) Fast Read Device supports dual input opcode & address and dual output data Fast Read.		00	0b	0 = not supported 1 = supported
Reserved. These bits default to all 1's		01		
	- 40h	02	111b	Reserved
		03		
Supports (4-4-4) Fast Read Device supports Quad input opcode & address and quad output data Fast Read.		04	1b	0 = not supported 1 = supported (QPI Mode)
		05		
Reserved. These bits default to all 1's		06	111b	Reserved
		07	]	
Reserved. These bits default to all 1's	43h : 41h	31 : 08	FFh	Reserved



### Table 10. Parameter ID (0) (Advanced Information) 6/9

Description	Address (h) (Byte Mode)	Address (Bit)	Data	Comment
Reserved. These bits default to all 1's	45h : 44h	15 : 00	FFh	Reserved
		16		
(2-2-2) Fast Read Number of Wait states (dummy clocks) needed before valid output		17		
	46h	18	00000b	Not Supported
		19		
		20		
		21	000b	Not Supported
(2-2-2) Fast Read Number of Mode Bits		22		
. ,		23		
(2-2-2) Fast Read Opcode Opcode for dual input opcode & address and dual output data Fast Read.	47h	31 : 24	FFh	Not Supported

#### Table 10. Parameter ID (0) (Advanced Information) 7/9

Description	Address (h) (Byte Mode)	Address (Bit)	Data	Comment
Reserved. These bits default to all 1's	49h : 48h	15 : 00	FFh	Reserved
(4-4-4) Fast Read Number of Wait states (dummy clocks) needed before valid output		16		
		17		
	4Ah	18	00100b	4 dummy clocks
		19		
		20		
		21	010b	8 mode bits
(4-4-4) Fast Read Number of Mode Bits		22		
, ,		23		
<b>(4-4-4) Fast Read Opcode</b> Opcode for quad input opcode/address, quad output data Fast Read.	4Bh	31 : 24	EBh	Must Enter QPI Mode Firstly

#### Table 10. Parameter ID (0) (Advanced Information) 8/9

Description	Address (h) (Byte Mode)	Address (Bit)	Data	Comment
Sector Type 1 Size	4Ch	07:00	0Ch	4 KB
Sector Type 1 Opcode	4Dh	15 : 08	20h	
Sector Type 2 Size	4Eh	23 : 16	0Fh	32 KB
Sector Type 2 Opcode	4Fh	31 : 24	52h	

#### Table 10. Parameter ID (0) (Advanced Information) 9/9

Description	Address (h) (Byte Mode)	Address (Bit)	Data	Comment
Sector Type 3 Size	50h	07:00	10h	64 KB
Sector Type 3 Opcode	51h	15 : 08	D8h	
Sector Type 4 Size	52h	23 : 16	00h	Not Supported
Sector Type 4 Opcode	53h	31 : 24	FFh	Not Supported



#### Read Unique ID Number

The Read Unique ID Number instruction accesses a factory-set read-only 96-bit number that is unique to each EN25QH16A device. The ID number can be used in conjunction with user software methods to help prevent copying or cloning of a system. The Read Unique ID instruction is initiated by driving the CS# pin low and shifting the instruction code "5Ah" followed by a three bytes of addresses, 0x80h, and one byte of dummy clocks. After which, the 96-bit ID is shifted out on the falling edge of CLK as shown in Figure 30.

#### Table 11. Unique ID Number

Description	Address (h) (Byte Mode)	Address (Bit)	Data	Comment
Unique ID Number	80h : 8Bh	95 : 00	By die	

# **Power-up Timing**

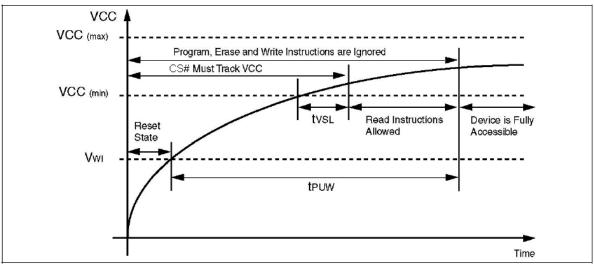


Figure 31. Power-up Timing

#### Table 12. Power-Up Timing and Write Inhibit Threshold

Symbol	Parameter	Min.	Max.	Unit
t <sub>VSL</sub> <sup>(1)</sup>	VCC(min) to CS# low	10		μs
<sup>t</sup> PUW <sup>(1)</sup>	Time delay to Write instruction	1	10	ms
VWI(1)	Write Inhibit Voltage	1	1.8	V

#### Note:

1. The parameters are characterized only.

2. VCC (max.) is 3.6V and VCC (min.) is 2.7V

# INITIAL DELIVERY STATE

The device is delivered with the memory array erased: all bits are set to 1 (each byte contains FFh). The Status Register contains 00h (all Status Register bits are 0).




#### Table 13. DC Characteristics

 $(T_a = -40^{\circ}C \text{ to } 85^{\circ}C; V_{CC} = 2.7-3.6V)$ 

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Unit
ILI	Input Leakage Current		-	1	± 2	μA
ILO	Output Leakage Current		-	1	± 2	μA
ICC1	Standby Current	CS# = $V_{CC}$ , $V_{IN}$ = $V_{SS}$ or $V_{CC}$	-	1	20	μA
I <sub>CC2</sub>	Deep Power-down Current	CS# = $V_{CC}$ , $V_{IN}$ = $V_{SS}$ or $V_{CC}$	-	1	20	μA
		CLK = 0.1 V <sub>CC</sub> / 0.9 V <sub>CC</sub> at 104MHz, DQ = open	-	10	15	mA
		CLK = 0.1 V <sub>CC</sub> / 0.9 V <sub>CC</sub> at 33MHz, DQ = open		5	8	mA
I <sub>CC3</sub>	Operating Current (READ)	CLK = 0.1 V <sub>CC</sub> / 0.9 V <sub>CC</sub> at 104MHz in Quad mode, DQ = open	-	12	18	mA
		CLK = 0.1 V <sub>CC</sub> / 0.9 V <sub>CC</sub> at 33MHz, Quad Output Read, DQ = open		6	10	mA
I <sub>CC4</sub>	Operating Current (PP)	$CS\# = V_{CC}$	-	10	20	mA
I <sub>CC5</sub>	Operating Current (WRSR)	$CS\# = V_{CC}$	-	5	12	mA
I <sub>CC6</sub>	Operating Current (SE)	CS# = V <sub>CC</sub>	-	5	10	mA
I <sub>CC7</sub>	Operating Current (BE)	CS# = V <sub>CC</sub>	-	10	25	mA
VIL	Input Low Voltage		- 0.5		0.2 V <sub>CC</sub>	V
VIH	Input High Voltage		0.7V <sub>CC</sub>		V <sub>CC</sub> +0.4	V
V <sub>OL</sub>	Output Low Voltage	I <sub>OL</sub> = 1.6 mA	-		0.4	V
V <sub>OH</sub>	Output High Voltage	I <sub>OH</sub> = –100 μA	V <sub>CC</sub> -0.2		-	V

#### Table 14. AC Measurement Conditions

Symbol	Parameter	Min.	Max.	Unit
CL	Load Capacitance	3	0	pF
	Input Rise and Fall Times		5	ns
	Input Pulse Voltages	0.2V <sub>CC</sub> t	:o 0.8V <sub>CC</sub>	V
	Input Timing Reference Voltages	0.3V <sub>CC</sub> t	o 0.7V <sub>CC</sub>	V
	Output Timing Reference Voltages	V <sub>CC</sub>	c / 2	V

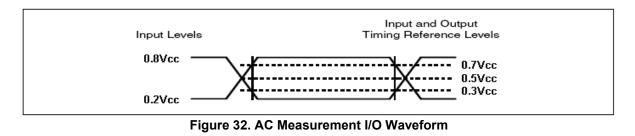

This Data Sheet may be revised by subsequent versions54Elite Semiconductor Memory Technology Inc.or modifications due to changes in technical specifications.54

Rev. C, Issue Date: 2016/03/22



## Table 15. AC Characteristics

 $(T_a = -40^{\circ}C \text{ to } 85^{\circ}C; V_{CC} = 2.7-3.6V)$ 

Symbol	Alt	Parameter	M	lin	Тур	Мах	Unit
F <sub>R</sub>	f <sub>c</sub>	Serial Clock Frequency for: FAST_READ, QPP, PP, SE, HBE, BI WREN, WRDI, WRSR, RDSR	E, DP, RES, D	.C.	-	104	MHz
R	C	Serial Clock Frequency for: RDID, Dual Output Fast Read and Qu Read	uad I/O Fast D	.C.	-	104	MHz
f <sub>R</sub>		Serial Clock Frequency for READ	D	.C.	-	50	MHz
t <sub>CH</sub> <sup>1</sup>		Serial Clock High Time		4	-	-	ns
t <sub>CL</sub> 1		Serial Clock Low Time		4	-	-	ns
t <sub>CLCH</sub> 2		Serial Clock Rise Time (Slew Rate)	0	).1	-	-	V / ns
t <sub>CHCL</sub> <sup>2</sup>		Serial Clock Fall Time (Slew Rate)	0	).1	-	-	V / ns
t <sub>SLCH</sub>	t <sub>css</sub>	CS# Active Setup Time (Relative to	CLK)	5	-	-	ns
t <sub>CHSH</sub>		CS# Active Hold Time (Relative to C	LK)	5	-	-	ns
t <sub>shCH</sub>		CS# Not Active Setup Time (Relative	e to CLK)	5	-	-	ns
t <sub>CHSL</sub>		CS# Not Active Hold Time (Relative	to CLK)	5	-	-	ns
t <sub>SHSL</sub>	t <sub>CSH</sub>	CS# High Time for read CS# High Time for program/erase		7 30	-	-	ns ns
t <sub>SHQZ</sub> <sup>2</sup>	t <sub>DIS</sub>	Output Disable Time		-	-	6	ns
t <sub>CLQX</sub>	t <sub>HO</sub>	Output Hold Time		0	-	-	ns
t <sub>DVCH</sub>	t <sub>DSU</sub>	Data In Setup Time		2	-	-	ns
t <sub>CHDX</sub>	t <sub>DH</sub>	Data In Hold Time		5	-	-	ns
t <sub>HLCH</sub>		HOLD# Low Setup Time ( relative to	CLK)	5			ns
t <sub>HHCH</sub>		HOLD# High Setup Time ( relative to	CLK )	5			ns
t <sub>СННН</sub>		HOLD# Low Hold Time ( relative to C	LK)	5			ns
t <sub>CHHL</sub>		HOLD# High Hold Time (relative to C	CLK )	5			ns
t <sub>HLQZ</sub> <sup>2</sup>	t <sub>HZ</sub>	HOLD# Low to High-Z Output				6	ns
t <sub>HHQX</sub> <sup>2</sup>	t <sub>LZ</sub>	HOLD# High to Low-Z Output				6	ns
t <sub>CLQV</sub>	t <sub>v</sub>	Output Valid from CLK for 30 pF Output Valid from CLK for 15 pF		-	-	8 6	ns
t <sub>WHSL</sub> <sup>3</sup>		Write Protect Setup Time before CS#	Low 2	20	-	-	ns
t <sub>SHWL</sub> <sup>3</sup>		Write Protect Hold Time after CS# Hi	gh 1	00	-	-	ns
t <sub>DP</sub> <sup>2</sup>		CS# High to Deep Power-down Mode	•	-	-	3	μs
t <sub>RES1</sub> <sup>2</sup>		CS# High to Standby Mode without E Signature read		-	-	3	μs
t <sub>RES2</sub> <sup>2</sup>		CS# High to Standby Mode with Elec Signature read	tronic	-	-	1.8	μs
t <sub>w</sub>		Write Status Register Cycle Time		-	2	15 2	ms
t <sub>PP</sub>		Page Programming Time Sector Erase Time		-	0.8 0.03	3 0.3	ms
t <sub>SE</sub>		32KB Block Erase Time		_	0.03	0.3 0.8	s s
t <sub>HBE</sub> t <sub>BE</sub>		64KB Block Erase Time			0.1	2	s
t <sub>CE</sub>		Chip Erase Time		_	6	30	s
		Software Reset WIP = write ope	ration	-	-	28	μs
t <sub>SR</sub>		Latency WIP = not in writ	e operation	-	-	0	μs

Note: 1. t<sub>CH</sub> + t<sub>CL</sub> must be greater than or equal to 1/ f<sub>C</sub>
2. Value guaranteed by characterization, not 100% tested in production.
3. Only applicable as a constraint for a Write status Register instruction when Status Register Protect Bit is set at 1.

This Data Sheet may be revised by subsequent versions or modifications due to changes in technical specifications. Elite Semiconductor Memory Technology Inc. 55



# EN25QH16A

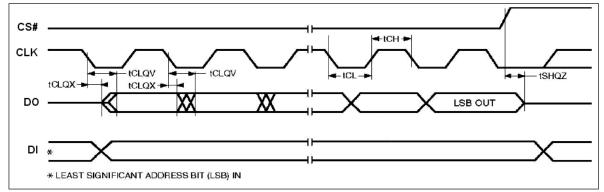


Figure 33. Serial Output Timing

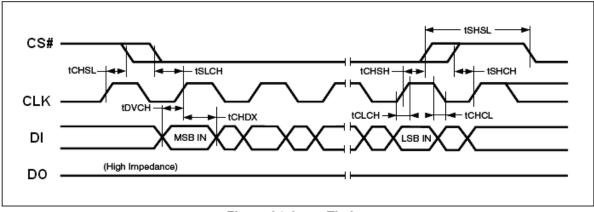


Figure 34. Input Timing

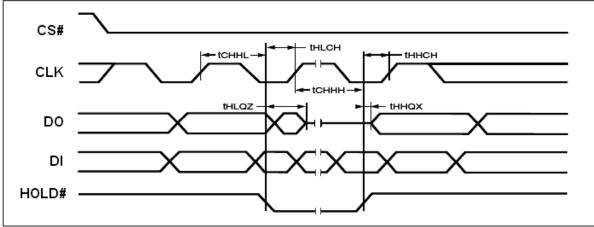


Figure 35. Hold Timing



# **ABSOLUTE MAXIMUM RATINGS**

Stresses above the values so mentioned above may cause permanent damage to the device. These values are for a stress rating only and do not imply that the device should be operated at conditions up to or above these values. Exposure of the device to the maximum rating values for extended periods of time may adversely affect the device reliability.

Parameter	Value	Unit
Storage Temperature	-65 to +150	С
Plastic Packages	-65 to +125	С
Output Short Circuit Current <sup>1</sup>	200	mA
Input and Output Voltage (with respect to ground) <sup>2</sup>	-0.5 to +4.0	V
Vcc	-0.5 to +4.0	V

Notes

1. No more than one output shorted at a time. Duration of the short circuit should not be greater than one second.


2. Minimum DC voltage on input or I/O pins is -0.5 V. During voltage transitions, inputs may undershoot V<sub>ss</sub> to -1.0V for periods of up to 50ns and to -2.0 V for periods of up to 20ns. See figure below. Maximum DC voltage on output and I/O pins is V<sub>cc</sub> + 0.5 V. During voltage transitions, outputs may overshoot to V<sub>cc</sub> + 1.5 V for periods up to 20ns. See figure below.

# **RECOMMENDED OPERATING RANGES**<sup>1</sup>


Parameter	Value	Unit
Ambient Operating Temperature Industrial Devices	-40 to 85	С
Operating Supply Voltage Vcc	Full: 2.7 to 3.6	V

Notes:

1. Recommended Operating Ranges define those limits between which the functionality of the device is guaranteed.

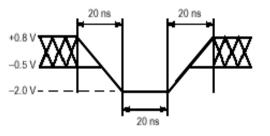

Maximum Negative Overshoot Waveform

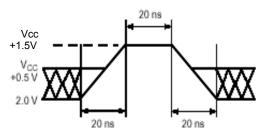

Maximum Positive Overshoot Waveform



#### Table 16. CAPACITANCE

#### (V<sub>CC</sub> = 2.7-3.6V)


Parameter Symbol	Parameter Description	Test Setup	Max	Unit
C <sub>IN</sub>	Input Capacitance	V <sub>IN</sub> = 0	6	pF
Cout	Output Capacitance	V <sub>OUT</sub> = 0	8	pF


**Note :** Sampled only, not 100% tested, at  $T_A$  = 25°C and a frequency of 20MHz.



# **PACKAGE MECHANICAL**


# Figure 36. SOP 8 (150 mil)

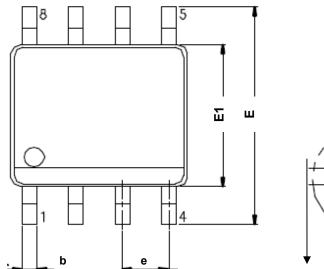


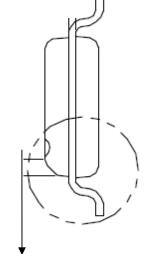

θ

Detail A

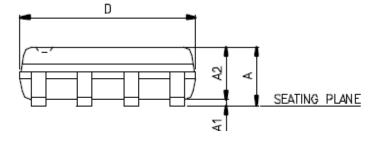




SYMBOL	DIN	DIMENSION IN MM				
STNBOL	MIN.	NOR	MAX			
A	1.35		1.75			
A1	0.10		0.25			
A2			1.50			
D	4.80		5.00			
E	5.80		6.20			
E1	3.80		4.00			
е		1.27				
b	0.33		0.51			
L	0.4		1.27			
θ	0 <sup>0</sup>		8 <sup>0</sup>			

Note : 1. Coplanarity: 0.1 mm



#### Figure 37. VSOP 8 (150 mil)

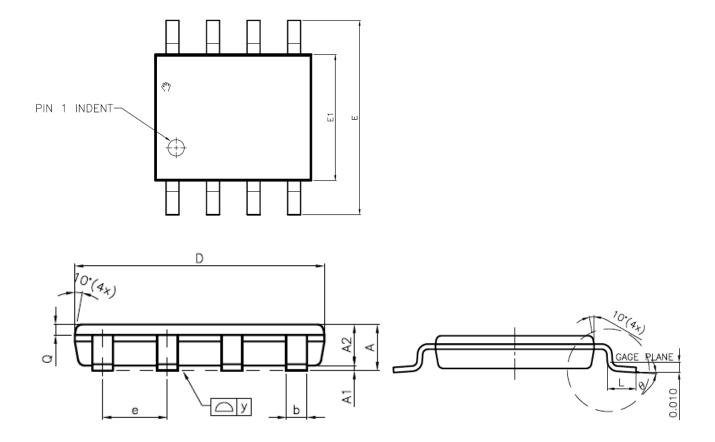



SYMBOL	DI	MENSION IN	MM
STINIBOL	MIN.	NOR	MAX
A			0.90
A1	0.05	0.10	0.15
A2	0.65	0.70	0.75
D	4.80	4.90	5.00
E	5.80	6.00	6.20
E1	3.80	3.90	4.00
е		1.27	
b	0.33	0.41	0.51
L	0.40	0.71	1.27
θ	0		10


Note : 1. Coplanarity: 0.1 mm




Figure 38. SOP 200 mil ( official name = 208 mil )

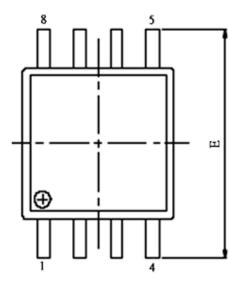





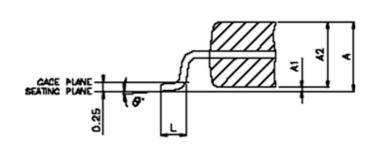


SYMBOL	DIN	DIMENSION IN MM				
STNIBOL	MIN.	NOR	MAX			
A	1.75	1.975	2.20			
A1	0.05	0.15	0.25			
A2	1.70	1.825	1.95			
D	5.15	5.275	5.40			
E	7.70	7.90	8.10			
E1	5.15	5.275	5.40			
е		1.27				
b	0.35	0.425	0.50			
L	0.5	0.65	0.80			
θ	00	4 <sup>0</sup>	8 <sup>0</sup>			

Note : 1. Coplanarity: 0.1 mm



#### Figure 39. USON 8 (4x3 mm)

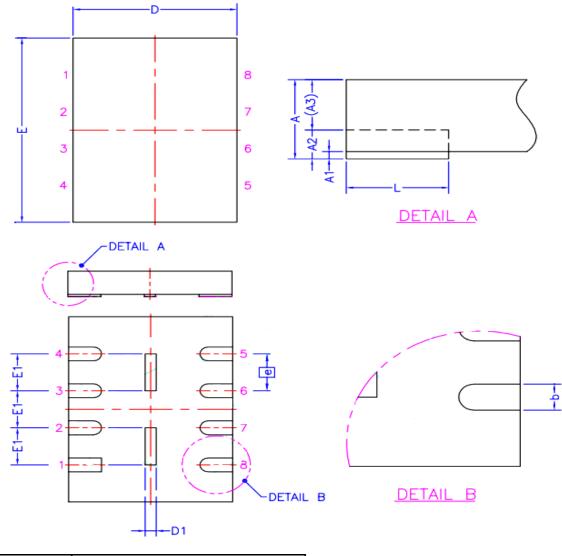


SYMBOL	DIN	MENSION IN I	MM
STMBOL	MIN.	NOR	MAX
A	0.5	0.55	0.6
A1	0	0.02	0.05
A2	-	0.15	-
A3	0.35	0.4	0.45
D	2.9	3.0	3.1
E	3.9	4.0	4.1
D1	0.1	0.2	0.3
E1	0.7	0.8	0.9
е		0.8	
b	0.25	0.3	0.35
L	0.55	0.6	0.65

Note : 1. Coplanarity: 0.1 mm



#### Figure 40. VDFN 8 (5x6 mm)

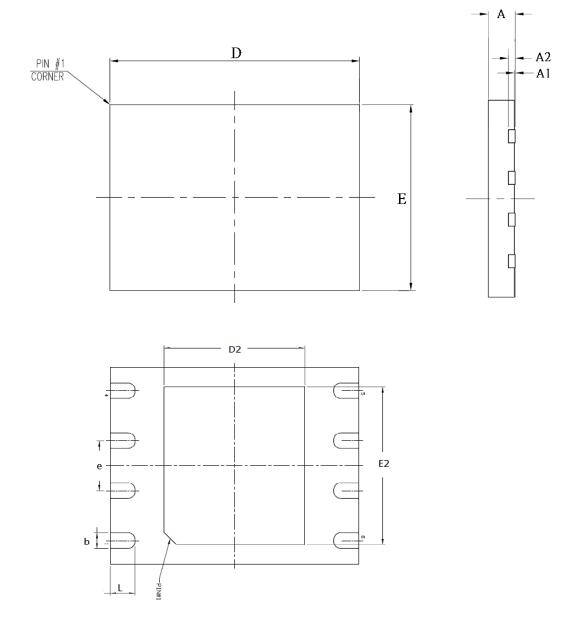


# Controlling dimensions are in millimeters (mm).


SYMBOL	DIN	DIMENSION IN MM			
STNIDUL	MIN.	NOR	MAX		
Α	0.70	0.75	0.80		
A1	0.00	0.02	0.04		
A2		0.20			
D	5.90	6.00	6.10		
E	4.90	5.00	5.10		
D2	3.30	3.40	3.50		
E2	3.90	4.00	4.10		
е		1.27			
b	0.35	0.40	0.45		
L	0.55	0.60	0.65		
Note : 1. Coplanarity: 0.1 mm					

This Data Sheet may be revised by subsequent versions or modifications due to changes in technical specifications. 63 Elite Semiconductor Memory Technology Inc.



Figure 41. PDIP8

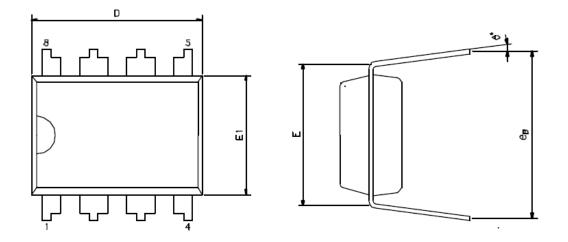


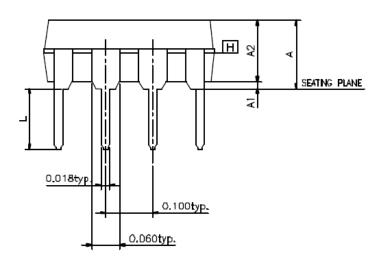

SYMBOL	DIMENSION IN INCH			
STWBOL	MIN.	NOR	MAX	
Α			0.210	
A1	0.015			
A2	0.125	0.130	0.135	
D	0.355	0.365	0.400	
E	0.300	0.310	0.320	
E1	0.245	0.250	0.255	
L	0.115	0.130	0.150	
e <sub>B</sub>	0.310	0.350	0.375	
Θ⁰	0	7	15	



## **ORDERING INFORMATION**

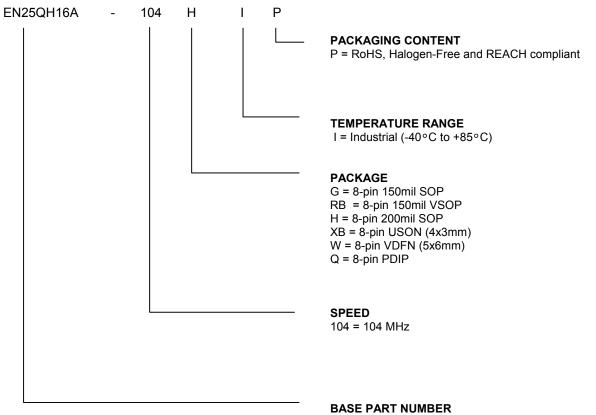

EN = Eon Silicon Solution Inc. 25QH = 3V Serial Flash with 4KB Uniform-Sector, Dual and Quad I/O 16 = 16 Megabit (2048K x 8) A = version identifier



# **Revisions List**

Revision No	Description	Date
Preliminary 0.0	Initial Release	2013/06/10
Preliminary 0.1	Supplement the description of Quad Input Page Program (QPP) (32h) on page 34.	
Preliminary 0.2	<ol> <li>Update Table 7.2 Status Register Bit Locations (In OTP mode) on page 21.</li> <li>Update Table 13. 104MHz DC Characteristics on page on page 54. (1) Correct the typo of I<sub>L1</sub> and I<sub>LO</sub> =&gt; ± 2µA (max.) (2) Update I<sub>CC4</sub> (PP) from 28 to 20 mA (max.). (3) Update I<sub>CC5</sub> (WRSR) from 10 / 18 to 5 / 12 mA (typ. / max). (4) Update I<sub>CC6</sub> (SE) from 10 / 25 to 5 / 10 mA (typ. / max).</li> <li>Update Table 15. 104 MHz AC Characteristics on page 55. (1) Update Write Status Register Cycle Time (t<sub>W</sub>) from 20 / 50 to 2 / 15 ms (typ. / max). (2) Update Page Programming Time (t<sub>PP</sub>) from 0.7 to 0.6 ms (typ.). (3) Update Sector Erase Time (t<sub>SE</sub>) from 0.2 to 0.3ms (max.).</li> </ol>	2013/10/02
Preliminary 0.3	1. Remove the package option of 8 contact USON (2x3 mm).	2013/11/18
A	Release A version.	
В	Change t <sub>HBE</sub> , t <sub>BE</sub> , tPP Write Inhibit Voltage to 1.8V	2015/06/11
С	Modify the tail	2016/03/22