

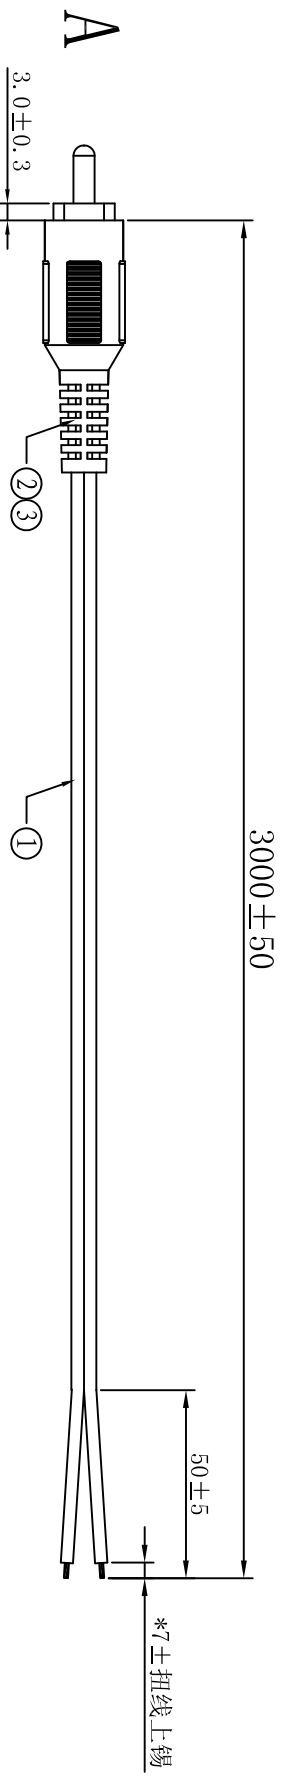


1	2	3	4	5	6	7	8
Changes the record			TOL	± 0.1mm	± 0.2mm	± 0.3mm	± 0.4mm
未标公差			SCOPE	0.00-5.00	5.01-20.00	20.01-50.00	150%以上
A	1		Unit	mm	Proportion	AO	Visual angle
A	2		Unit	mm	Proportion	AO	Visual angle

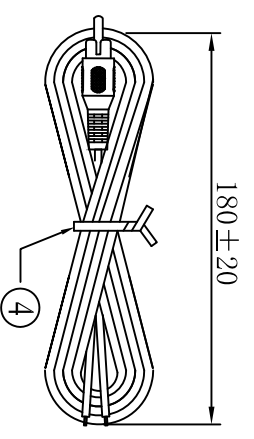

- 注: 1. 成品线注塑头上印有富迪商标 (TXLC • FT)  
 2. 成品需做100%导通测试  
 3. 图中\*为重点管控尺寸  
 4. 所有物料需符合ROHS/RECH环保要求



D	4	扎线	L100mm黑色PE有芯扎线	PCS	1
	3	胶壳	45P黑色PVC插头料	g	2.5
	2	RCA	四缝高张力棕胶RCA封闭头 铜材镀镍	PCS	1
D	1	线材	UL 2468 222AWG (17/0.16TS)*2P 1.6*3.2红黑并线 80°C/300V L=3000mm	PCS	1
	1	product name	Detail specification	part no.	Unit
	2				QTY

TXLC • FT		东莞富迪电子有限公司	
DONG GUAN FUDI ELECTRONICS CO., LTD			
核准 (APPROVED)		客户名称 (CUSTOMER NAME)	IBS
审核 (CHECKED)	范美文	客户料号 (ITEM NO)	
设计 (DESIGNED)	廉俊锋	品名规格 (PRODUCT NAME)	RCA 2468 222AWG 红黑 L=3000mm
日期 (DATE)	2018-9-7	工程图号 (DRAW NO)	FT-CB-18090705