

Specifications




备注 (Remark)
 1. 材料 (MATERIAL)
 胶芯: PA9T+30%G.F UL94V-0, 颜色: 黑色.
 Housing: PA9T+30%G.F UL94V-0, Color: Black
 四方针: 黄铜, 镍底30u"MIN, 表面镀金0.8u"MIN
 Contact: Brass, 0.8u"MIN GOLD PLATING OVER ALL
 30u" MIN NICKEL UNDERPLATING OVER ALL

2. 特性 (characteristics):
 额定电流: 1 AMP
 Rating Current: 1 AMP.
 接触阻抗: 20 mΩ MAX.
 Contact Resistance: 20 mΩ MAX.
 绝缘阻抗: 1000 MΩ MIN.
 Insulating Resistance: 1000 MΩ MIN.
 耐电压: AC 500V.
 Withstanding Voltage: AC 500V.
 温度范围: -40° C to +105° C
 Temperature Range: -40° C to +105° C

Ordering Information

P310-11 XX A0 C S 062 A 1

HEIGHT OF HOUSING	NO. OF PINS PER ROW	Contact Plating	INSULATOR MATERIAL: OF	LENGTH OF TERMINAL	PACKING
10: 1.0mm	1-50P	Full Of Gold	B: PA6T	A: PE Bag	B: Tape & Reel
		Semi-gold	C: PA9T	C: Tube	D: Tube+CAP
			D: LCP	E: Tray	
		A0=0.8u"			
		A1=1u"			
		A2=1.5u"			
		A3=2u"			
		A4=3u"			
		A5=5u"			
		A6=10u"			
		A7=15u"			
		A8=20u"			
		A9=30u"			
		S1=Ordinary Tin Plated			
		S2=Matte Tin Plated			
		S3=Tin-plated High-temperature			

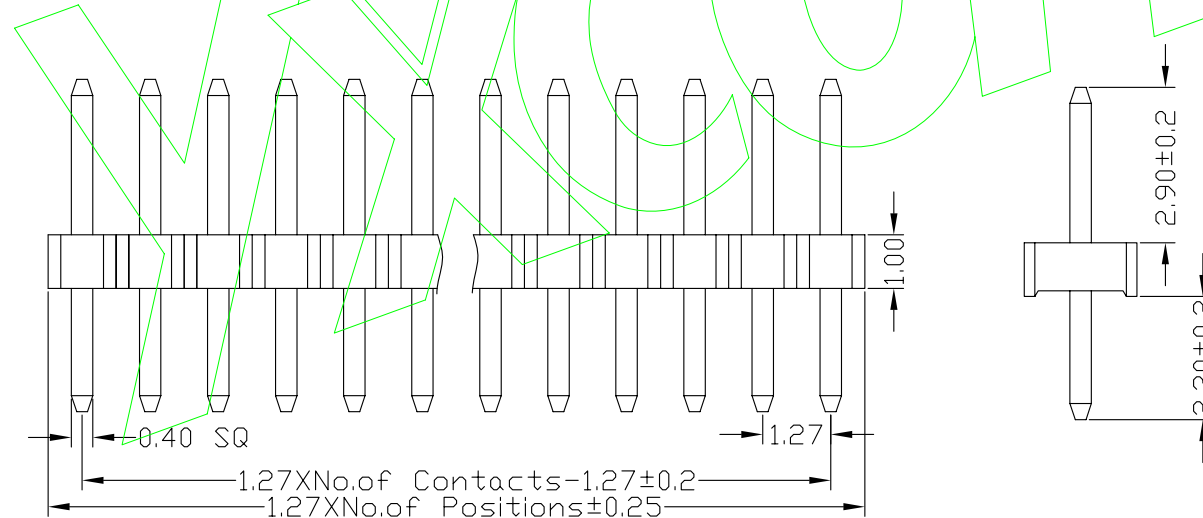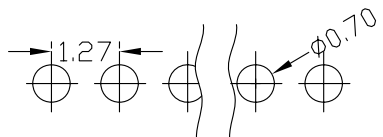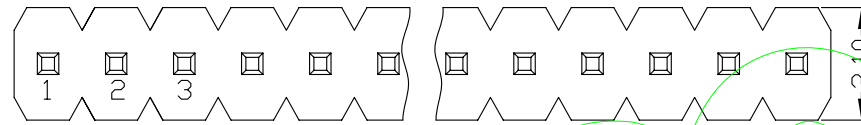

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	APPROVE	OPERATION		SCALE		Fit	Yxcon 东莞市宇熙精密连接器有限公司 Dongguan Yuxi Electronic Co., Ltd.	PART NO.	P310-11XXA0CS062A1
					X.X	±0.25	UNIT	MM				
					X.XX	±0.20	SIZE	A4	DESIGN	杨哲		
					X.XXX	±0.10	SHEET	1/1	CHECK		TITLE:	1.27mm排针 塑高1.0 1*XXP 镀普金 PA9T料 180度 1=6.2/2.3 袋装
					Angle	±3°	PROJ.	☉	APPROVE		Customer No.	
					DIM	TOL						