

HIGH CURRENT MOLDED POWER INDUCTOR

P7636 Family

Features

- Lead free (Pb-free)
- RoHS compliant
- Very low DC resistance
- Very high current rating
- Low profile
- Flat top for pick & place
- Shielded

Applications

- Energy storage choke for
- DC/DC Converters
 - VRM modules
 - POL Converters

DESCRIPTION

The P7636 family comprises of very high current shielded power choke coil in low profile size.

The products self-leaded construction consist of ferrite core and helical coil from enamel-coated copper wire.

The range covers inductance values from 0.33 μ H to 10 μ H, and provides compact solutions for high power applications with saturation currents ranging between 16 A to 80 A.

The P7636 family is compliant with RoHS Directive 2002/95/EC and suitable for lead-free and conventional placement and reflow.



P7636

SPECIFICATIONS

ELECTRICAL



Part No.	Inductance (μH) L ₀	I _{sat} (A) Typ.	DCR (mΩ)	Height
P7636-1205-R33M	0,33	80	0,70	4,80
P7636-1205-R47M	0,47	65	0,86	4,80
P7636-1205-R56M	0,56	55	1,00	4,80
P7636-1205-R68M	0,68	54	1,40	4,80
P7636-1205-1R0M	1,00	50	1,85	4,80
P7636-1205-1R5M	1,50	48	2,80	4,80
P7636-1205-1R8M	1,80	40	4,00	4,80
P7636-1205-2R2M	2,20	32	4,20	4,80
P7636-1205-3R3M	3,30	32	6,80	4,80
P7636-1205-4R7M	4,70	27	11,40	4,80
P7636-1205-5R6M	5,60	21	12,30	4,80
P7636-1205-6R8M	6,80	21	14,50	4,80
P7636-1205-8R2M	8,20	18	16,80	4,80
P7636-1205-100M	10,00	16	21,40	4,80

Notes:

- a) Test Freq. : 100KHz/ 1V
- b) Ambient Temp. : 25°C
- c) Operating Temp. : -40°C to +125°C
- d) Storage Temp. : -10°C to +40°C
- e) Humidity Range. : 50~60% RH (Product without taping)
- f) Heat Rated Current (I_{rms}) will cause the coil temperature rise approximately Δt of 40°C. (keep 1 min)
- g) Saturation Current (I_{sat} 1) will cause L₀ to drop 20% typical. (keep quickly)
- h) Part Temperature (Ambient+Temp.Rise): Should not exceed 125°C under worst case operating conditions.

CONSTRUCTION

Recommended PC Board Pattern

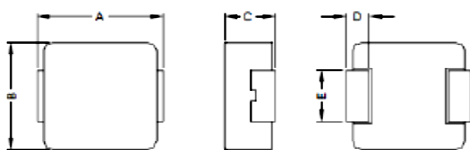

A	B	C	D	E
13,5±0,5	12,5±0,3	4,8±0,2	2,3±0,3	4,7±0,3

Unit: mm


MARKING

- Product Code (Height code + Inductance code)
- Manufacturing Date Code


SPECIFICATIONS

CHARACTERISTIC CURVES


P7636-1205-R33M




P7636-1205-R47M




P7636-1205-R56M




P7636-1205-R68M




P7636-1205-1R0M




P7636-1205-1R5M



P7636-1205-1R8M



P7636-1205-2R2M




P7636


SPECIFICATIONS

CHARACTERISTIC CURVES


P7636-1205-3R3M




P7636-1205-4R7M




P7636-1205-5R6M




P7636-1205-6R8M



P7636-1205-8R2M



P7636-1205-100M




P7636

SPECIFICATIONS

CHARACTERISTIC CURVES

- a) The inductance vs. current and temperature characteristic curves presented are typical values
- b) The inductance vs. current curves are generated by measuring inductors at 25°C ambient temperature.
- c) Temperature rise is measured at an ambient temperature of 25°C. A current is applied for 8 minutes and temperature is measured when the point of the components temperature is stable using an infrared thermometer directed at the bottom surface of the component. No forced air cooling is applied.
- d) Temperature response need to be verified in specific applications and can only be carried out by the customer

ORDERING CODE

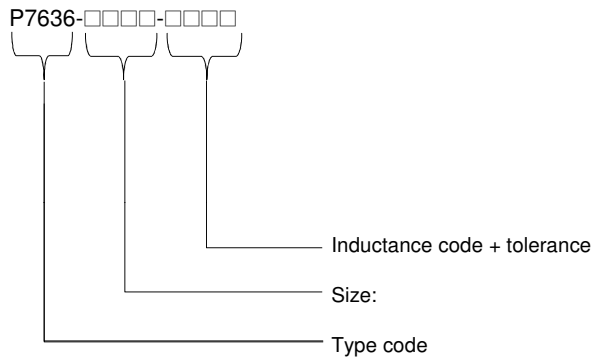

NOTES:
Units are packed in tape and reel



ETAL Group AB, Box 39 162 11 Vällingby, Sweden
Telephone: +46 8 759 35 00 Fax: +46 8 759 3540
Website: www.etalgroup.com E-mail: sales.se@etalgroup.com