

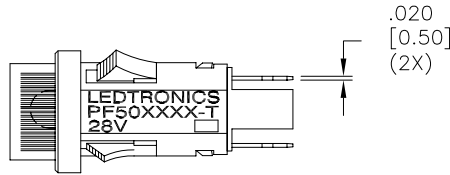


LTR	REVISION	DATE	APPD
-	RELEASED	06-07-11	

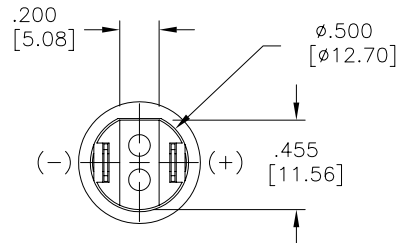

ROTATED 90°

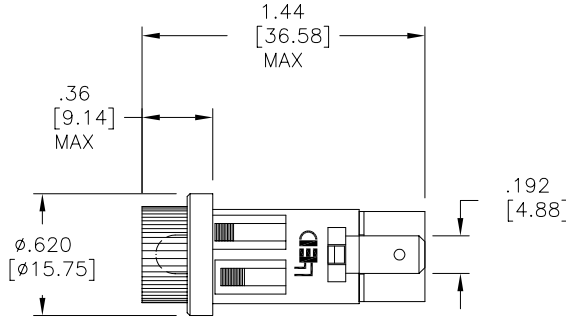

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. MOUNTING DIAMETER: $\phi 1/2"$
3. PARTS WITH (*) ARE "RoHS" CERTIFIED.
4. LENS MATERIAL: LEXAN 101-112
5. SLEEVE MATERIAL: BLACK, NYLON 66 (UL94V-1 MIN / UL94V-0 PREF)
6. HEADER MATERIAL: BLACK, NYLON 66 (UL94V-1 MIN / UL94V-0 PREF)
7. TERMINAL MATERIAL: TIN PLATED BRASS



REVISION NOTIFICATION	
<input type="checkbox"/>	PMA
<input type="checkbox"/>	UL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER

PF50-0AG-028V-T*	-	AQUA GREEN	28Vdc	10-15	5000	520	180°
PF50-0CW-028V-T*	-	COOL WHITE	28Vdc	10-15	3000	8000K	180°
PF50-0PB-028V-T*	-	SUPER BLUE	28Vdc	10-15	-	463	180°
PF50-0UO-028V-T	PF50C03K-28V-T	SUPER ORANGE	28Vdc	15-20	-	610	180°
PF50-0UR-028V-T*	-	ULTRA RED	28Vdc	15-20	900	652	180°
PF50-0UY-028V-T*	-	SUPER YELLOW	28Vdc	15-20	1800	595	180°
PF50-1AG-028V-T	-	AQUA GREEN	28Vdc	15-20	-	520	180°
PF50CG5-0004*	PF50CG5-28V/20-B/T1	HI-EFF GREEN	28Vdc	15-20	145	565	180°
PF50CR5-0004*	PF50CR5-28V/20-B/T1	HI-EFF RED	28Vdc	15-20	120	644	180°
PF50CR6-28V-T*	-	ULTRA RED	28Vdc	15-20	225	654	180°
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	ELECTRICAL TEST				VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)
			INPUT VOLTAGE, V	I _f , mA (typ.)	I _v , mcd (typ.)	λ P nm	

LED[®]
LEDTRONICS,™ INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE					
PF50-0XX-028V-T PF50CX5-0004					
DWG NO	SCALE	SHEET	DATE		
PF50-28VDC-T	1:1	1 OF 1	06-07-11		
CODE IDENT NO.	DWG BY GP	CHK BY PL	QA	MFG	R&D
8Z410	06-07-11	06-07-11			