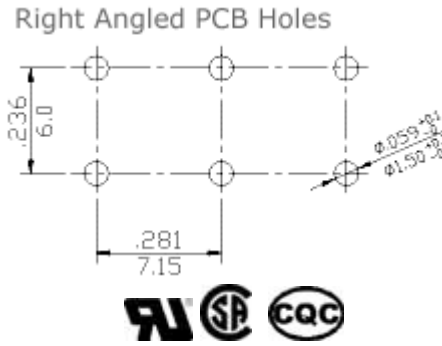
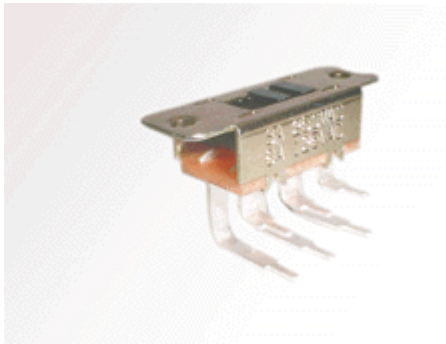

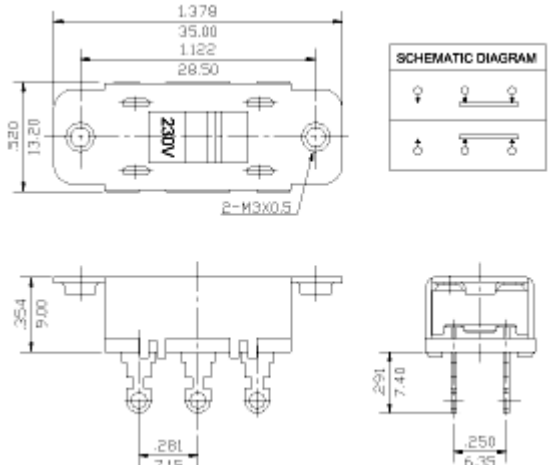



SL13 SERIES
SLIDE SWITCHES UP TO 6A 125VAC
 double poles, panel mounting, solder lug or PCB terminals



- ┆ 6A 125VAC, 3A 250VAC (UL, CSA)
- ┆ 3A 250VAC (CQC)
- ┆ Contact resistance : 30m ohm initial max.
- ┆ Insulation resistance : 100M ohm min., 500VDC
- ┆ Withstand voltage : 1,000 VAC-1 minute.
- ┆ Life cycle : 6,000 cycles
- ┆ Operation : 700±300 gram.
- ┆ Frame : Zinc rainbow plated steel
- ┆ Actuator : Nylon, UL rated 94V-2 min
- ┆ Base : Phenolic Laminate, UL rated 94V-2 min
- ┆ Contact : Silver Plated Phosphor bronze
- ┆ Terminal : Tin plated Brass

[How to Order](#)

 <u>SL13B-022AMB0</u>	
 <u>SL13B-022BHC1</u>	

