

Metallized Polypropylene (PP) Capacitors PCM 7.5 mm to 37.5 mm

Special Features

- High volume/capacitance ratio
- Self-healing
- Very low dissipation factor
- Negative capacitance change versus temperature
- Very low dielectric absorption
- According to RoHS 2002/95/EC

Typical Applications

For high frequency applications e.g.

- Sample and hold
- Timing
- Oscillating circuits
- High frequency coupling and decoupling

Construction


Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:

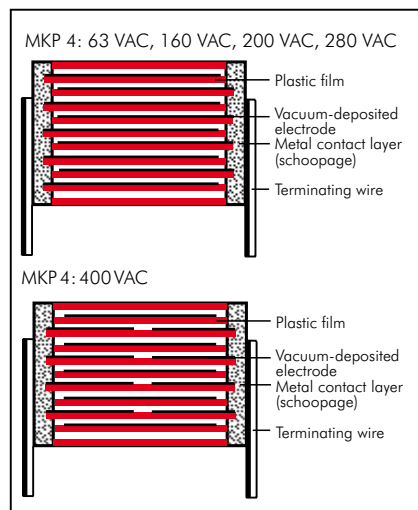

Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire.

Marking:

Colour: Red. Marking: Black.
Epoxy resin seal: Red

Electrical Data

Capacitance range:

0.01 μF to 33 μF (E12-values on request)

Rated voltages:

100 VDC, 250 VDC, 400 VDC,
630 VDC, 1000 VDC

Capacitance tolerances:

$\pm 20\%$, $\pm 10\%$, $\pm 5\%$

Operating temperature range:

-55°C to $+100^\circ\text{C}$

Climatic test category:

55/100/56 in accordance with IEC

Insulation resistance at $+20^\circ\text{C}$:

$C \leq 0.33 \mu\text{F}$: $\geq 1 \times 10^5 \text{ M}\Omega$

(mean value: $5 \times 10^5 \text{ M}\Omega$)

$C > 0.33 \mu\text{F}$: $\geq 30\,000 \text{ sec (M}\Omega \times \mu\text{F)}$

(mean value: 100 000 sec)

Measuring voltage: 100 V/1 min.

Dissipation factors at $+20^\circ\text{C}$:

$\tan \delta \leq 10 \times 10^{-4}$ at 1 kHz

Maximum pulse rise time:

Capacitance μF	max. pulse rise time V/ μsec at $T_A < 40^\circ\text{C}$				
	100 VDC	250 VDC	400 VDC	630 VDC	1000 VDC
0.01 ... 0.022	450	450	450	500	550
0.033 ... 0.068	250	250	300	350	400
0.1 ... 0.22	150	150	200	250	300
0.33 ... 0.68	100	100	150	200	200
1.0 ... 2.2	75	100	100	150	150
3.3 ... 4.7	60	100	100	120	–
6.8 ... 10	40	50	60	85	–
15 ... 33	35	50	–	–	–

for pulses equal to the rated voltage

Test specifications:

In accordance with IEC 60384-16
and EN 131 200

Test voltage:

$1.6 U_r$, 2 sec.

Dielectric absorption:

0.05%

Voltage derating:

A voltage derating factor of 1.35 % per K
must be applied from $+85^\circ\text{C}$ for DC
voltages and from $+75^\circ\text{C}$ for AC
voltages.

Reliability:

Operational life $> 300\,000$ hours

Failure rate $< 2 \text{ fit (} 0.5 \times U_r \text{ and } 40^\circ\text{C)}$

Mechanical Tests

Pull test on pins:

$d \leq 0.8 \phi$: 10 N in direction of pins

$d > 0.8 \phi$: 20 N in direction of pins

according to IEC 60068-2-21

Vibration:

6 hours at 10 ... 2000 Hz and 0.75 mm

displacement amplitude or 10 g in

accordance with IEC 60068-2-6

Low air density:

1 kPa = 10 mbar in accordance with

IEC 60068-2-13

Bump test:

4000 bumps at 390 m/sec²

in accordance with IEC 60068-2-29

Packing

Available taped and reeled up to and

including case size 15 x 26 x 31.5 /

PCM 27.5 mm.

Detailed taping information and graphs

at the end of the catalogue.

For further details and graphs please

refer to Technical Information.

Continuation

General Data


Capacitance	100 VDC/63 VAC*					250 VDC/160 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μ F	3	8.5	10	7.5	MKP4D021002B00_____	3	8.5	10	7.5	MKP4F021002B00_____
0.015 "	3	8.5	10	7.5	MKP4D021502B00_____	3	8.5	10	7.5	MKP4F021502B00_____
0.022 "	3	8.5	10	7.5	MKP4D022202B00_____	3	8.5	10	7.5	MKP4F022202B00_____
0.033 "	3	8.5	10	7.5	MKP4D023302B00_____	3	8.5	10	7.5	MKP4F023302B00_____
0.047 "	4	9	13	10	MKP4D023303C00_____	4	9	13	10	MKP4F023303C00_____
	4	9	10	7.5	MKP4D024702C00_____	4	9	10	7.5	MKP4F024702C00_____
0.068 "	4	9	13	10	MKP4D024703C00_____	4	9	13	10	MKP4F024703C00_____
	4	9	10	7.5	MKP4D026802C00_____	4	9	10	7.5	MKP4F026802C00_____
0.1 μ F	4	9	13	10	MKP4D026803C00_____	4	9	13	10	MKP4F026803C00_____
	4.5	9.5	10.3	7.5	MKP4D031002D00_____	4.5	9.5	10.3	7.5	MKP4F031002D00_____
0.15 "	4	9	13	10	MKP4D031003C00_____	4	9	13	10	MKP4F031003C00_____
	5	10.5	10.3	7.5	MKP4D031502E00_____	5	10.5	10.3	7.5	MKP4F031502E00_____
0.22 "	5	11	13	10	MKP4D031503F00_____	5	11	13	10	MKP4F031503F00_____
	6	12	13	10	MKP4D032203G00_____	6	12	13	10	MKP4F032203G00_____
0.33 "	5	11	18	15	MKP4D032204B00_____	5	11	18	15	MKP4F032204B00_____
	6	12.5	18	15	MKP4D033304C00_____	6	12.5	18	15	MKP4F033304C00_____
0.47 "	7	14	18	15	MKP4D034704D00_____	7	14	18	15	MKP4F034704D00_____
0.68 "	8	15	18	15	MKP4D036804F00_____	8	15	18	15	MKP4F036804F00_____
	6	15	26.5	22.5	MKP4D036805B00_____	6	15	26.5	22.5	MKP4F036805B00_____
1.0 μ F	7	16.5	26.5	22.5	MKP4D041005D00_____	7	16.5	26.5	22.5	MKP4F041005D00_____
1.5 "	10.5	19	26.5	22.5	MKP4D041505G00_____	10.5	19	26.5	22.5	MKP4F041505G00_____
2.2 "	11	21	26.5	22.5	MKP4D042205I00_____	11	21	26.5	22.5	MKP4F042205I00_____
	11	21	31.5	27.5	MKP4D042206B00_____	11	21	31.5	27.5	MKP4F042206B00_____
3.3 "	13	24	31.5	27.5	MKP4D043306D00_____	13	24	31.5	27.5	MKP4F043306D00_____
4.7 "	13	24	31.5	27.5	MKP4D044706D00_____	15	26	31.5	27.5	MKP4F044706F00_____
6.8 "	15	26	31.5	27.5	MKP4D046806F00_____	17	29	31.5	27.5	MKP4F046806G00_____
	13	24	41.5	37.5	MKP4D046807C00_____	15	26	41.5	37.5	MKP4F046807D00_____
10 μ F	17	29	41.5	37.5	MKP4D051007E00_____	19	32	41.5	37.5	MKP4F051007F00_____
15 "	19	32	41.5	37.5	MKP4D051507F00_____	20	39.5	41.5	37.5	MKP4F051007G00_____
22 "	20	39.5	41.5	37.5	MKP4D052207G00_____	24	45.5	41.5	37.5	MKP4F051007H00_____
33 "	24	45.5	41.5	37.5	MKP4D053307H00_____					

* AC voltage: $f \leq 400$ Hz; $1.4 \times U_{rms} + UDC \leq U_r$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

$\varnothing d$	PCM	W
0.5	7.5	≤ 3
0.6	7.5	≥ 4
0.6	10	
0.8	15 - 27.5	
1.0	37.5	



Part number completion:	
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 127.	

Rights reserved to amend design data without prior notification.

Continuation page 53

Continuation

General Data

Capacitance	400 VDC/220 VAC*					630 VDC/280 VAC*				
	W	H	L	PCM**	Part number	W	H	L	PCM**	Part number
0.01 μ F	3	8.5	10	7.5	MKP4G021002B00_____	3	8.5	10	7.5	MKP4J021002B00_____
						4	9	13	10	MKP4J021003C00_____
0.015 "	3	8.5	10	7.5	MKP4G021502B00_____	4	9	10	7.5	MKP4J021502C00_____
	4	9	13	10	MKP4G021503C00_____	4	9	13	10	MKP4J021503C00_____
0.022 "	4	9	10	7.5	MKP4G022202C00_____	4.5	9.5	10.3	7.5	MKP4J022202D00_____
	4	9	13	10	MKP4G022203C00_____	4	9	13	10	MKP4J022203C00_____
0.033 "	4.5	9.5	10.3	7.5	MKP4G023302D00_____	5	10.5	10.3	7.5	MKP4J023302E00_____
	4	9	13	10	MKP4G023303C00_____	4	9	13	10	MKP4J023303C00_____
0.047 "	5	10.5	10.3	7.5	MKP4G024702E00_____	5.7	12.5	10.3	7.5	MKP4J024702F00_____
	4	9	13	10	MKP4G024703C00_____	5	11	13	10	MKP4J024703F00_____
0.068 "	5.7	12.5	10.3	7.5	MKP4G026802F00_____	6	12	13	10	MKP4J026803G00_____
	5	11	13	10	MKP4G026803F00_____	6	12.5	18	15	MKP4J026804C00_____
0.1 μ F	6	12	13	10	MKP4G031003G00_____	7	14	18	15	MKP4J031004D00_____
	5	11	18	15	MKP4G031004B00_____					
0.15 "	6	12.5	18	15	MKP4G031504C00_____	8	15	18	15	MKP4J031504F00_____
						6	15	26.5	22.5	MKP4J031505B00_____
0.22 "	7	14	18	15	MKP4G032204D00_____	9	16	18	15	MKP4J032204J00_____
						7	16.5	26.5	22.5	MKP4J032205D00_____
0.33 "	8	15	18	15	MKP4G033304F00_____	8.5	18.5	26.5	22.5	MKP4J033305F00_____
	6	15	26.5	22.5	MKP4G033305B00_____					
0.47 "	7	16.5	26.5	22.5	MKP4G034705D00_____	10.5	19	26.5	22.5	MKP4J034705G00_____
						11	21	31.5	27.5	MKP4J034706B00_____
0.68 "	8.5	18.5	26.5	22.5	MKP4G036805F00_____	11	21	31.5	27.5	MKP4J036806B00_____
1.0 μ F	11	21	26.5	22.5	MKP4G041005I00_____	13	24	31.5	27.5	MKP4J041006D00_____
	11	21	31.5	27.5	MKP4G041006B00_____					
1.5 "	11	21	31.5	27.5	MKP4G041506B00_____	15	26	31.5	27.5	MKP4J041506F00_____
2.2 "	15	26	31.5	27.5	MKP4G042206F00_____	17	29	41.5	37.5	MKP4J042207E00_____
3.3 "	17	29	31.5	27.5	MKP4G043306G00_____	19	32	41.5	37.5	MKP4J043307F00_____
	17	29	41.5	37.5	MKP4G043307E00_____					
4.7 "	19	32	41.5	37.5	MKP4G044707F00_____	20	39.5	41.5	37.5	MKP4J044707G00_____
6.8 "	20	39.5	41.5	37.5	MKP4G046807G00_____	24	45.5	41.5	37.5	MKP4J046807H00_____
10 μ F	24	45.5	41.5	37.5	MKP4G051007H00_____					

* AC voltage: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Part number completion:

Tolerance: 20 % = M

10 % = K

5 % = J

Packing: bulk = S

Pin length: 6-2 = SD

Taped version see page 127.

Rights reserved to amend design data without prior notification.

Continuation page 54

Continuation

General Data

Capacitance	1000 VDC/400 VAC*				Part number
	W	H	L	PCM**	
0.01 μF	5.7	12.5	10.3	7.5	MKP4O121002F00_
	5	11	13	10	MKP4O121003F00_
0.015 "	5	11	13	10	MKP4O121503F00_
	5	11	18	15	MKP4O121504B00_
0.022 "	5	11	18	15	MKP4O122204B00_
0.033 "	6	12.5	18	15	MKP4O123304C00_
0.047 "	7	14	18	15	MKP4O124704D00_
0.068 "	8	15	18	15	MKP4O126804F00_
	6	15	26.5	22.5	MKP4O126805B00_
0.1 μF	9	16	18	15	MKP4O131004J00_
	7	16.5	26.5	22.5	MKP4O131005D00_
0.15 "	8.5	18.5	26.5	22.5	MKP4O131505F00_
0.22 "	11	21	26.5	22.5	MKP4O132205I00_
	11	21	31.5	27.5	MKP4O132206B00_
0.33 "	11	21	31.5	27.5	MKP4O133306B00_
0.47 "	13	24	31.5	27.5	MKP4O134706D00_
0.68 "	17	29	31.5	27.5	MKP4O136806G00_
1.0 μF	17	29	41.5	37.5	MKP4O141007E00_
1.5 "	20	39.5	41.5	37.5	MKP4O141507G00_
2.2 "	24	45.5	41.5	37.5	MKP4O142207H00_

Part number completion:	
Tolerance:	20 % = M
	10 % = K
	5 % = J
Packing:	bulk = S
Pin length:	6-2 = SD
Taped version see page 127.	






* AC voltage: $f \leq 400 \text{ Hz}$; $1.4 \times U_{\text{rms}} + \text{UDC} \leq U_r$

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Rights reserved to amend design data without prior notification.

Permissible AC voltage in relation to frequency at 10° C internal temperature rise (general guide).

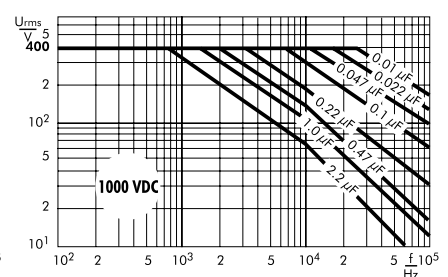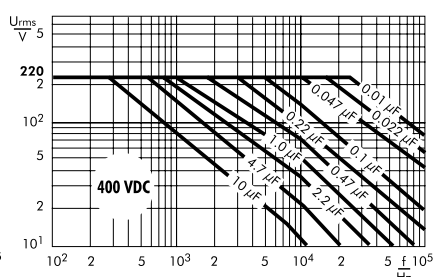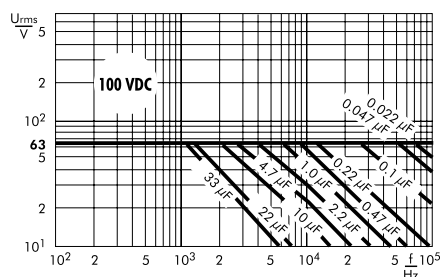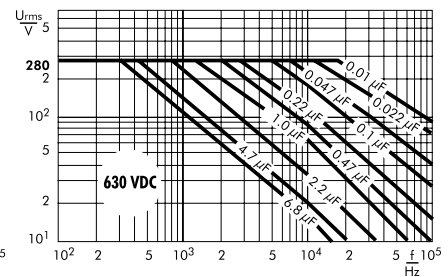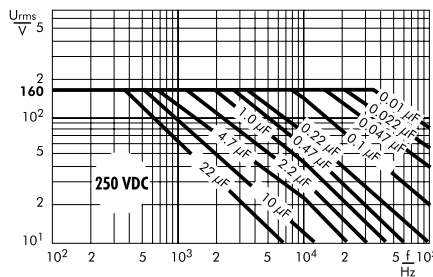

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

A preheating of through-hole WIMA capacitors is allowed for temperatures $T_{\max} < 100^{\circ}\text{C}$.
In practice a preheating duration of $t < 5$ min. has been proven to be best.


Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$
Immersion time: $t < 5$ sec

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$
Immersion time: $2 \times t < 3$ sec

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

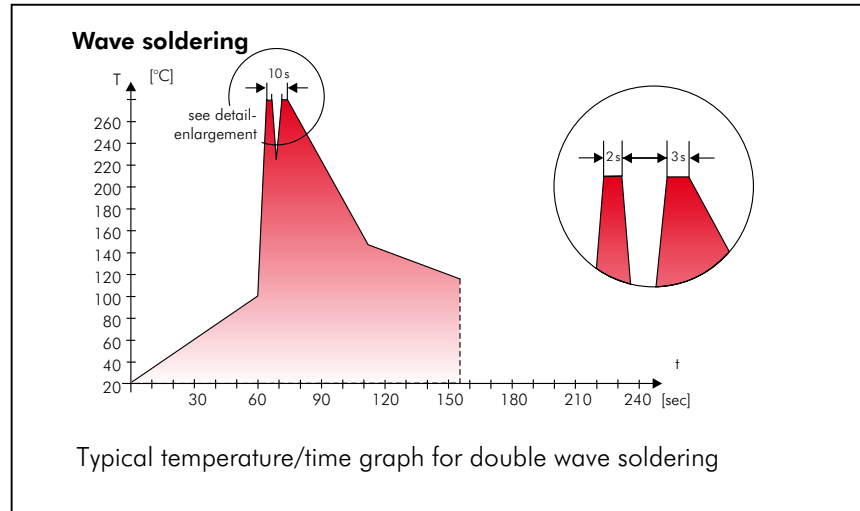

WIMA Quality and Environmental Philosophy

ISO 9001:2008 Certification

ISO 9001:2008 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2008 of our factories by the VDE inspectorate certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application of WPCS during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- AQL check

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- foamed polystyrene (Styropor®)
- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2002/95/EC certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2002/95/EG

WIMA capacitors are lead free in accordance with RoHS 2002/95/EC

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration

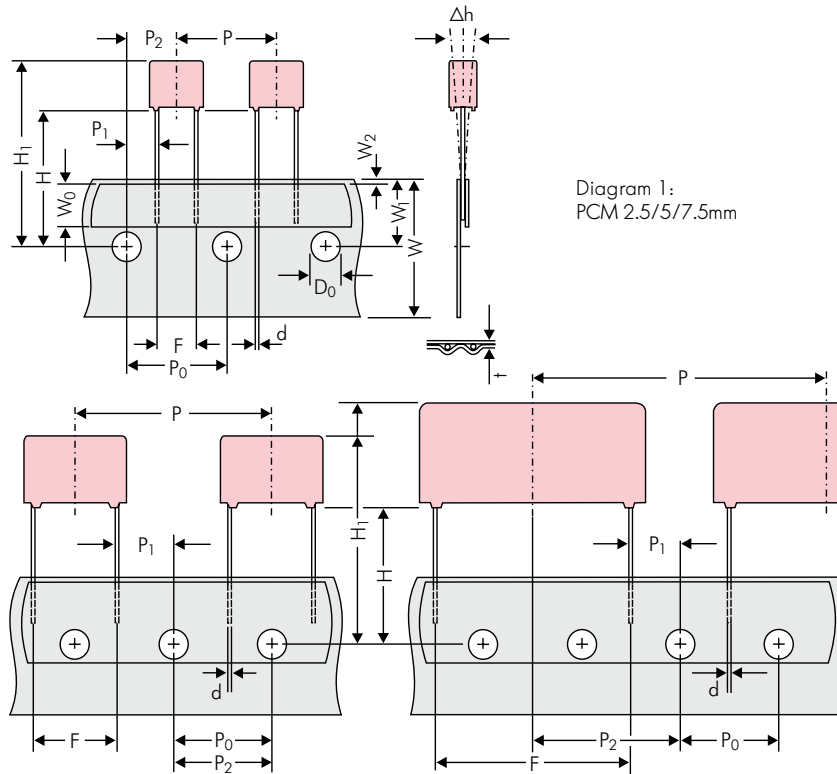


Diagram 1:
PCM 2.5/5/7.5mm

Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	PCM 5 taping	PCM 7.5 taping	PCM 10 taping*	PCM 15 taping*	PCM 22.5 taping	PCM 27.5 taping
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W ₀	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W ₁	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W ₂	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D ₀	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P ₀	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P ₁	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P ₂	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H	16.5 ±0.3 18.5 ±0.5	16.5 ±0.3 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5	16.5 ±0.5 18.5 ±0.5
Feed hole centre to top edge of the component	H ₁	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 32.25 max.	H+H _{component} < H ₁ 24.5 to 31.5	H+H _{component} < H ₁ 25.0 to 31.5	H+H _{component} < H ₁ 26.0 to 37.0	H+H _{component} < H ₁ 30.0 to 43.0	H+H _{component} < H ₁ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 ^{+0.8} _{-0.2}	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}	0.8 ^{+0.08} _{-0.05}
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2	0.7 ±0.2
Package (see also page 128)	ROLL/AMMO			AMMO				
	REEL	φ 360 max. φ 30 ±1	B 52 ±2 58 ±2 } depending on comp. dimensions	REEL	φ 360 max. φ 30 ±1	52 ±2 58 ±2 or 66 ±2	REEL	φ 500 max. φ 25 ±1
Unit	see details page 130.							

Dims in mm.

* Diameter of pins see General Data.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P₀ = 12.7 or 15.0 is possible

Please clarify customer-specific deviations with the manufacturer.

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
	W	H	L	Codes		S	H16.5 N	H18.5 O	ø 360 H16.5 F	ø 500 H18.5 I	H16.5 H	H18.5 J	340 x 340 H16.5 A	490 x 370 H18.5 C	H16.5 B
2.5 mm	2.5	7	4.6	0B	5000		2200		2500		-		2800		-
	3	7.5	4.6	0C	5000		2000		2300		-		2300		-
	3.8	8.5	4.6	0D	5000		1500		1800		-		1800		-
	4.6	9	4.6	0E	5000		1200		1500		-		1500		-
	5.5	10	4.6	0F	5000		900		1200		-		1200		-
5 mm	2.5	6.5	7.2	1A	5000		2200		2500		-		2800		-
	3	7.5	7.2	1B	5000		2000		2300		-		2300		-
	3.5	8.5	7.2	1C	5000		1600		2000		-		2000		-
	4.5	6	7.2	1D	6000		1300		1500		-		1500		-
	4.5	9.5	7.2	1E	4000		1300		1500		-		1500		-
	5	10	7.2	1F	3500		1100		1400		-		1400		-
	5.5	7	7.2	1G	4000		1000		1200		-		1200		-
	5.5	11.5	7.2	1H	2500		1000		1200		-		1200		-
	6.5	8	7.2	1I	2500		800		1000		-		1000		-
	7.2	8.5	7.2	1J	2500		700		1000		-		1000		-
	7.2	13	7.2	1K	2000		700		950		-		1000		-
	8.5	10	7.2	1L	2000		600		800		-		800		-
8.5	14	7.2	1M	1500		600		800		-		800		-	
11	16	7.2	1N	1000		500		700		-		700		-	
7.5 mm	2.5	7	10	2A	5000		-		2500		4400		2500		-
	3	8.5	10	2B	5000		-		2200		4300		2300		4150
	4	9	10	2C	4000		-		1700		3200		1700		3100
	4.5	9.5	10.3	2D	3500		-		1500		2900		1400		2800
	5	10.5	10.3	2E	3000		-		1300		2500		1300		-
	5.7	12.5	10.3	2F	2000		-		1000		2200		1100		-
	7.2	12.5	10.3	2G	1500		-		900		1800		1000		-
10 mm	3	9	13	3A	3000		-		1100		2200		-		1900
	4	8.5	13.5	FA	3000		-		900		1600		-		1450
	4	9	13	3C	3000		-		900		1600		-		1450
	4	9.5	13	3D	3000		-		900		1600		-		1400
	5	10	13.5	FB	2000		-		700		1300		-		1200
	5	11	13	3F	3000		-		700		1300		-		1200
	6	12	13	3G	2400		-		550		1100		-		1000
	6	12.5	13	3H	2400		-		550		1100		-		1000
8	12	13	3I	2000		-		400		800		-		740	
15 mm	5	11	18	4B	2400		-		600		1200		-		1150
	5	13	19	FC	1000		-		600		1200		-		1200
	6	12.5	18	4C	2000		-		500		1000		-		1000
	6	14	19	FD	1000		-		500		1000		-		1000
	7	14	18	4D	1600		-		450		900		-		850
	7	15	19	FE	1000		-		450		900		-		850
	8	15	18	4F	1200		-		400		800		-		740
	8	17	19	FF	500		-		400		800		-		740
	9	14	18	4H	1200		-		350		700		-		650
	9	16	18	4J	900		-		350		700		-		650
	10	18	19	FG	500		-		300		650		-		590
11	14	18	4M	1000		-		300		600		-		540	
22.5 mm	5	14	26.5	5A	1200		-		-		800		-		770
	6	15	26.5	5B	1000		-		-		700		-		640
	7	16.5	26.5	5D	760		-		-		600		-		550
	8	20	28	FH	500		-		-		500		-		480
	8.5	18.5	26.5	5F	500		-		-		480		-		450
	10	22	28	FI	540*		-		-		420		-		380
	10.5	19	26.5	5G	680*		-		-		400		-		360
	10.5	20.5	26.5	5H	680*		-		-		400		-		360
	11	21	26.5	5I	680*		-		-		380		-		350
	12	24	28	FJ	450*		-		-		350		-		310

* Tray Packing-System
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing units								
						ROLL		REEL				AMMO		
	W	H	L	Codes		S	H16.5	H18.5	ø 360		ø 500		340 × 340	
					N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	6A	640*	–	–	–	–	460/340*	–	–	–	420
	11	21	31.5	6B	544*	–	–	–	–	380/280*	–	–	–	350
	13	24	31.5	6D	448*	–	–	–	–	300	–	–	–	290
	13	25	33	6K	336*	–	–	–	–	270	–	–	–	250
	15	26	31.5	6F	384*	–	–	–	–	–	–	–	–	–
	15	26	33	6L	288*	–	–	–	–	–	–	–	–	–
	17	29	31.5	6G	176*	–	–	–	–	–	–	–	–	–
	17	34.5	31.5	6I	176*	–	–	–	–	–	–	–	–	–
	19	30	31.5	6L	50*	–	–	–	–	–	–	–	–	–
	20	32	33	6M	216*	–	–	–	–	–	–	–	–	–
20	39.5	31.5	6J	144*	–	–	–	–	–	–	–	–	–	
37.5 mm	9	19	41.5	7A	480*	–	–	–	–	–	–	–	–	–
	11	22	41.5	7B	408*	–	–	–	–	–	–	–	–	–
	13	24	41.5	7C	252*	–	–	–	–	–	–	–	–	–
	15	26	41.5	7D	144*	–	–	–	–	–	–	–	–	–
	17	29	41.5	7E	132*	–	–	–	–	–	–	–	–	–
	19	32	41.5	7F	108*	–	–	–	–	–	–	–	–	–
	20	39.5	41.5	7G	108*	–	–	–	–	–	–	–	–	–
	24	45.5	41.5	7H	84*	–	–	–	–	–	–	–	–	–
	31	46	41.5	7I	72*	–	–	–	–	–	–	–	–	–
	35	50	41.5	7J	35*	–	–	–	–	–	–	–	–	–
40	55	41.5	7K	28*	–	–	–	–	–	–	–	–	–	
48.5 mm	19	31	56	8D	50*	–	–	–	–	–	–	–	–	–
	23	34	56	8E	72*	–	–	–	–	–	–	–	–	–
	27	37.5	56	8H	60*	–	–	–	–	–	–	–	–	–
	33	48	56	8J	48*	–	–	–	–	–	–	–	–	–
	37	54	56	8L	25*	–	–	–	–	–	–	–	–	–
52.5 mm	35	50	57	9F	25*	–	–	–	–	–	–	–	–	–
	45	55	57	9H	20*	–	–	–	–	–	–	–	–	–
	45	65	57	9J	20*	–	–	–	–	–	–	–	–	–

* for 2-inch transport pitches.

* Tray Packing System

Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.



A WIMA part number consists of 18 digits and is composed as follows:

- Field 1 - 4: Type description
- Field 5 - 6: Rated voltage
- Field 7 - 10: Capacitance
- Field 11 - 12: Size and PCM
- Field 13 - 14: Special features (e.g. Snubber versions)
- Field 15: Capacitance tolerance
- Field 16: Packing
- Field 17 - 18: Lead length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	K	S	2	C	0	2	1	0	0	1	A	0	0	M	S	S	D
MKS 2				63 VDC		0.01 µF			2.5x6.5x7.2		-		20%	bulk	6 -2		

<p>Type description:</p> <p>SMD-PET = SMDT SMD-PPS = SMDI FKP 02 = FKP0 MKS 02 = MKS0 FKS 2 = FKS2 FKP 2 = FKP2 MKS 2 = MKS2 MKS 2 = MKP2 FKS 3 = FKS3 FKP 3 = FKP3 MKS 4 = MKS4 MKP 4 = MKP4 MKP 10 = MKP1 FKP 4 = FKP4 FKP 1 = FKP1 MKP-X2 = MKX2 MKP-X2 R = MKXR MKP-Y2 = MKY2 MP 3-X2 = MPX2 MP 3-X1 = MPX1 MP 3-Y2 = MPY2 MP 3R-Y2 = MPRY Snubber MKP = SNMP Snubber FKP = SNFP GTO MKP = GTOM DC-LINK MKP 4 = DCP4 DC-LINK MKP 5 = DCP5 DC-LINK MKP 6 = DCP6 DC-LINK HC = DCH_ SuperCap C = SCSC SuperCap MC = SCMC SuperCap R = SCSR SuperCap MR = SCMR</p>	<p>Rated voltage:</p> <p>2.5 VDC = A1 4 VDC = A2 14 VDC = A3 28 VDC = A4 40 VDC = A5 5 VDC = A6 50 VDC = B0 63 VDC = C0 100 VDC = D0 160 VDC = E0 250 VDC = F0 400 VDC = G0 450 VDC = H0 600 VDC = I0 630 VDC = J0 700 VDC = K0 800 VDC = L0 850 VDC = M0 900 VDC = N0 1000 VDC = O1 1100 VDC = P0 1200 VDC = Q0 1250 VDC = R0 1500 VDC = S0 1600 VDC = T0 2000 VDC = U0 2500 VDC = V0 3000 VDC = W0 4000 VDC = X0 6000 VDC = Y0 250 VAC = 0W 275 VAC = 1W 300 VAC = 2W 400 VAC = 3W 440 VAC = 4W 500 VAC = 5W</p>	<p>Capacitance:</p> <p>22 pF = 0022 47 pF = 0047 100 pF = 0100 150 pF = 0150 220 pF = 0220 330 pF = 0330 470 pF = 0470 680 pF = 0680 1000 pF = 1100 1500 pF = 1150 2200 pF = 1220 3300 pF = 1330 4700 pF = 1470 6800 pF = 1680 0.01 µF = 2100 0.022 µF = 2220 0.047 µF = 2470 0.1 µF = 3100 0.22 µF = 3220 0.47 µF = 3470 1 µF = 4100 2.2 µF = 4220 4.7 µF = 4470 10 µF = 5100 22 µF = 5220 47 µF = 5470 100 µF = 6100 220 µF = 6220 1 F = A010 2.5 F = A025 50 F = A500 100 F = B100 110 F = B110 600 F = B600 1200 F = C120 ...</p>	<p>Size:</p> <p>4.8x3.3x3 Size 1812 = KA 4.8x3.3x4 Size 1812 = KB 5.7x5.1x3.5 Size 2220 = QA 5.7x5.1x4.5 Size 2220 = QB 7.2x6.1x3 Size 2824 = TA 7.2x6.1x5 Size 2824 = TB 10.2x7.6x5 Size 4030 = VA 12.7x10.2x6 Size 5040 = XA 15.3x13.7x7 Size 6054 = YA 2.5x7x4.6 PCM 2.5 = 0B 3x7.5x4.6 PCM 2.5 = 0C 2.5x6.5x7.2 PCM 5 = 1A 3x7.5x7.2 PCM 5 = 1B 2.5x7x10 PCM 7.5 = 2A 3x8.5x10 PCM 7.5 = 2B 3x9x13 PCM 10 = 3A 4x9x13 PCM 10 = 3C 5x11x18 PCM 15 = 4B 6x12.5x18 PCM 15 = 4C 5x14x26.5 PCM 22.5 = 5A 6x15x26.5 PCM 22.5 = 5B 9x19x31.5 PCM 27.5 = 6A 11x21x31.5 PCM 27.5 = 6B 9x19x41.5 PCM 37.5 = 7A 11x22x41.5 PCM 37.5 = 7B 94x49x182 DCH_ = H0 94x77x182 DCH_ = H1 ...</p>	<p>Tolerance:</p> <p>20% = M 10% = K 5% = J 2.5% = H 1% = E ...</p> <p>Packing:</p> <p>AMMO H16.5 340x340 = A AMMO H16.5 490x370 = B AMMO H18.5 340x340 = C AMMO H18.5 490x370 = D REEL H16.5 360 = F REEL H16.5 500 = H REEL H18.5 360 = I REEL H18.5 500 = J ROLL H16.5 = N ROLL H18.5 = O BLISTER W12 180 = P BLISTER W12 330 = Q BLISTER W16 330 = R BLISTER W24 330 = T Bulk Standard = S TPS Standard = Y ...</p>	
				<p>Special features:</p> <p>Standard = 00 Version A1 = 1A Version A1.1.1 = 1B Version A1.2 = 1C ...</p>	<p>Lead length (untaped)</p> <p>3.5 ±0.5 = C9 6 -2 = SD 16 ±1 = P1 ...</p>

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.