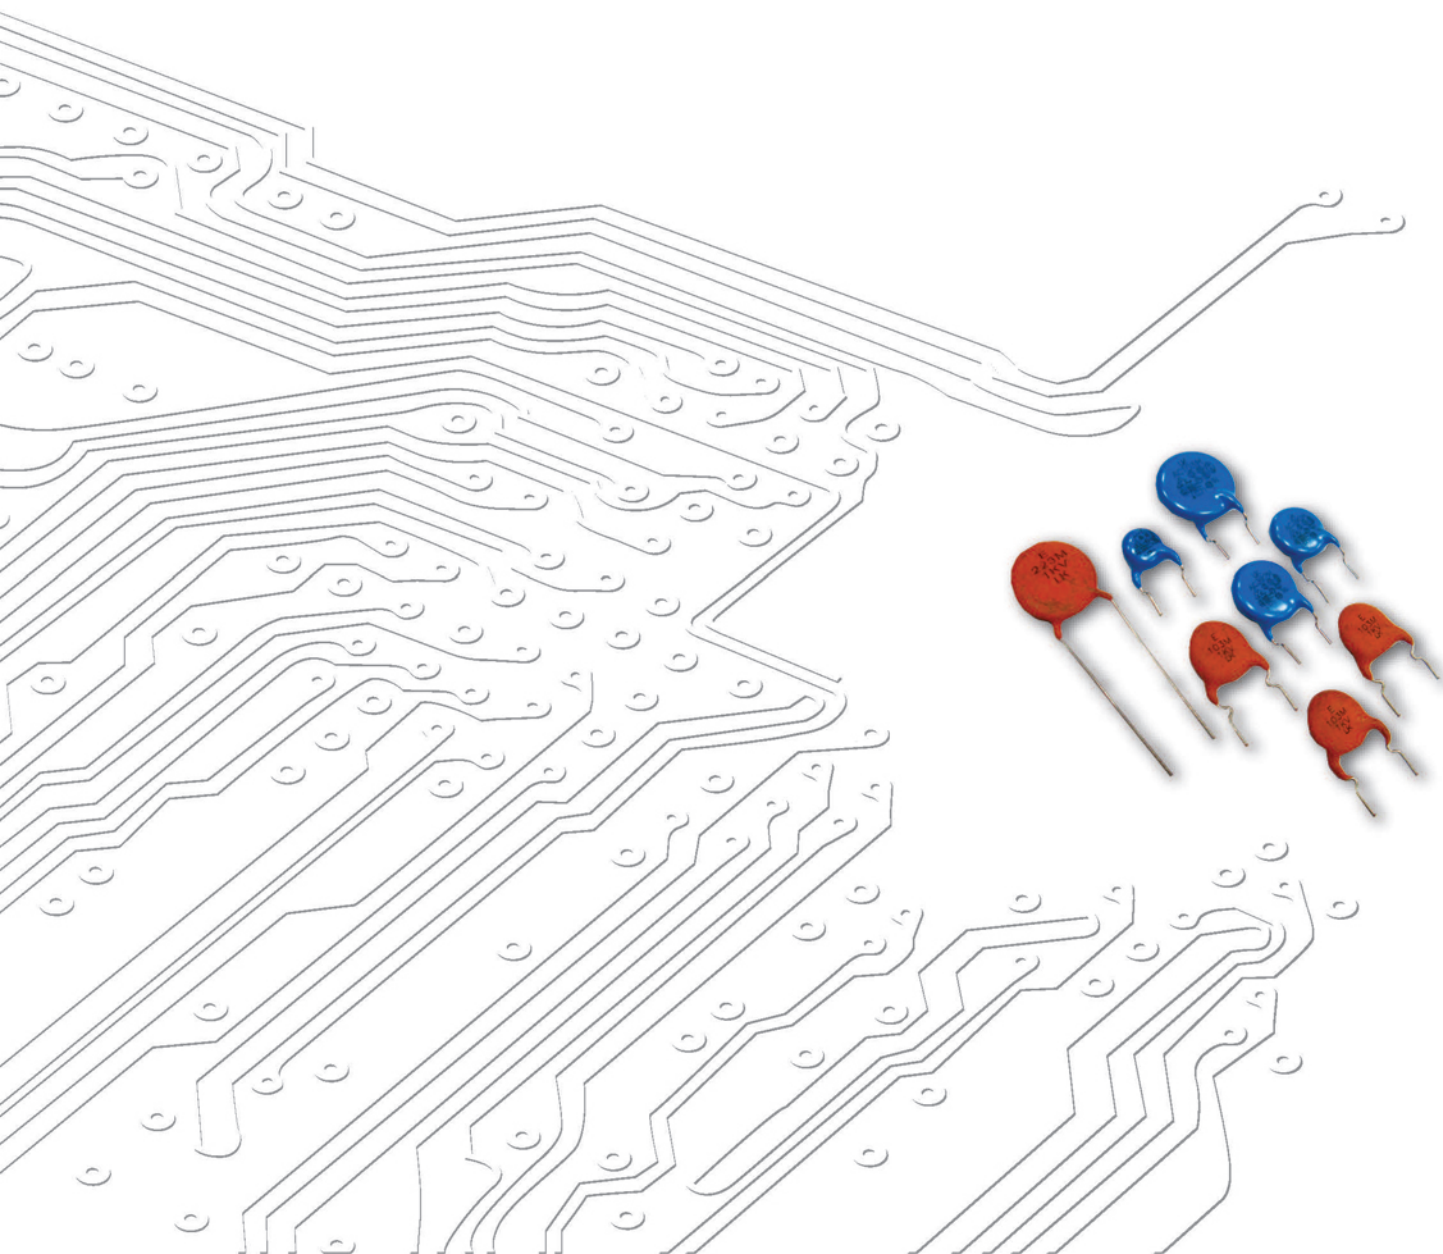


Disc Capacitors

Product catalog

www.passivecomponent.com



Product Portfolio



Multilayer Ceramic Capacitors (MLCC)



Chip-Resistor



Disc Capacitors



RF Device and High Frequency Inductors



Antenna



Inductors



Varistors and SMD-Varistors

IEC-63 Nominal Resistance / Capacitance

E1	100																							
E3	100				220					470														
E6	100	150	220	330	470	680																		
E12	100	120	150	180	220	270	330	390	470	560	680	820												
E24	100	110	120	130	150	160	180	200	220	240	270	300	330	360	390	430	470	510	560	620	680	750	820	910
E96	100	102	121	124	147	150	178	182	215	221	261	267	316	324	383	392	464	475	562	576	681	698	825	845
	105	107	127	130	154	158	187	191	226	232	274	280	332	340	402	412	487	499	590	604	715	732	866	887
	110	113	133	137	162	165	196	200	237	243	287	294	348	357	422	432	511	523	619	634	750	768	909	931
	115	118	140	143	169	174	205	210	249	255	301	309	365	374	442	453	536	549	649	665	787	806	953	976

E6: $\sqrt[6]{10} \approx 1.46$ E12: $\sqrt[12]{10} \approx 1.21$

E1 series resistance: 1Ω, 10Ω, 100Ω, 1000Ω, 10000Ω, 100000Ω

INDEX

Subject	Page
CERAMIC CAPACITOR PART NUMBER EXPLANATION.....	1
CLASS I 50V, 100V, 500V, 1KV, 2KV, 3KV, 6KV TEMPERATURE COMPENSATION TYPE.....	2~4
CLASS II 50V, 100V, 500V, 1KV, 2KV, 3KV HI-K TYPE.....	5~9
CLASS III SEMI-CONDUCTIVE TYPE.....	10
1KV, 2KV, 3KV LOW DISSIPATION LB, LR TYPE.....	11~16
SAFETY STANDARD CERAMIC CAPACITOR PART NUMBER EXPLANATION.....	17
AH and AS Type-Class X1/Y1; AC Type-Class X1/Y2.....	18~19
SAFETY STANDARD CERAMIC CAPACITOR DETAIL SPECIFICATION.....	20- 21
APPROVAL FILE NUMBER, TAPING SPECIFICATION AND DIMENSION, MARKING.....	22~26
RADIAL LEADED MULTILAYER CERAMIC CAPACITOR PART NUMBER EXPLANATION.....	27
RADIAL LEADED CAPACITOR FEATURES DIMENSION.....	28
RADIAL LEADED CAPACITANCE RANGE AND MARKING.....	29~31
MPQ (Min Packing Quantity).....	32

*The specifications are subject to change or products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

*This catalog has only typical specifications because there is no space for detailed specifications. Therefore, please approve our product specifications or transact the approval sheet for product specifications before ordering.



CERAMIC CAPACITOR PART NUMBER EXPLANATION

To order, please also specify Pan Overseas Part No. as the following example for SAP system :

YP	500	102	K	040	B	20	C	7	H
Dielectric Code	Voltage Code	Capacitance Code	Tolerance Code	Diameter Code	Lead Style	Length or Packing	Length Tolerance	Pitch	Coating
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩

① Dielectric Code

CLASS I:		
CODE	T.C. (ppm/°C)	
SL	SL (-1000 ~ +350) (+20°C to +85°C)	
CLASS II:		
CODE	T.C. (ΔC%)	
YP	Y5P (±10%)	
ZU	Z5U (+22 ~ -56%)	
ZV	Z5V (+22 ~ -82%)	
YU	Y5U (+22 ~ -56%)	
YV	Y5V (+22 ~ -82%)	
CLASS III:		
CODE	T.C. (ΔC%)	
FY	Y5V (+22 ~ -82%)	
Low DF:		
CODE	D.F.	T.C. (ΔC%)
LR	≤0.2%	Y5R (+15 ~ -30%) (-25°C to +125°C)
LB	≤0.5%	Y5P(±10%)

② Voltage Code

CODE	WV
160	16 VDC
250	25 VDC
500	50 VDC
501	500 VDC
102	1KVDC
202	2KVDC
302	3KVDC
602	6KVDC

③ Capacitance Code

CODE	Capacitance
080	8 pF
100	10 pF
101	100 pF
102	1000 pF
472	4700 pF
103	0.01uF
104	0.1uF

④ Tolerance Code

CODE	Tolerance
D	± 0.5pF
J	± 5%
K	± 10%
M	± 20%
Z	-20 ~ +80 %

⑤ Diameter Code

CODE	Diameter max
040	Refer to the product diameter D max
050	
060	
070	
080	
090	
100	
110	
120	
130	
140	

⑥ Lead Style-Reference Lead Style

⑦ Packing / Pitch / Lead Length

Taping(ex)	
CODE	Packing & Pitch
AF	Ammo Box & Pitch 15.0 mm
AN	Ammo Box & Pitch 12.7 mm
AM	Ammo Box & Pitch 25.4 mm
Bulk (ex)	
CODE	Length
3E	3.5mm
04	4.0mm
4E	4.5mm
05	5.0mm
20	20.0mm

⑧ Length Tolerance

CODE	Length Tolerance
A	± 0.5 mm (Only for short kink lead type)
B	± 1.0 mm
C	Min.
D	Tapping & Special Purpose

⑨ Pitch

CODE	Length Pitch
2	2.5±0.8mm
5	5.0±0.8mm (for Bulk)
5	5.0+0.8-0.2mm (for Taping)
7	7.5 ± 1mm
0	10.0 ± 1mm

⑩ Coating Type

CODE	Coating
A	Phenolic resin-Halogen free and Pb free
H	Epoxy resin-Halogen free and Pb free

CERAMIC DISC CAPACITOR

CLASS I 50V, 100V, 500V, 1KV, 2KV, 3KV, 6KV TEMPERATURE COMPENSATION TYPE

CERAMIC DISC CAPACITOR:

CLASS I 50V, 100V, 500V, 1KV, 2KV, 3KV, 6KV TEMPERATURE COMPENSATION TYPE







Features

- Capacitance has linear temperature coefficient
- Capacitance high stability
- Epoxy Coating for 1KV, 2KV, 3KV, 6KV parts (equivalent to UL94V-0 standards)
- RoHS Compliance
- Halogen free products are available
- Low loss at wide range of frequency

General specification

Capacitance Range	8pF to 820pF (See page 3 to page 5)
Capacitance Tolerance	±0.5pF(for 8~10pF), ±5%(for 10~820pF),
Operating Temperature Range	-25°C ~ +125°C.
Rated Voltage	50,100, 500, 1000, 2000, 3000 ,6000 VDC
Q Factor @ 1MHz, 1±0.2 Vrms, 25°C	C ≥ 30 pF.....Q ≥ 1,000, C < 30 pF.....Q ≥ 400+20°C
Insulation Resistance (IR) @ 25°C	10,000 MΩ Minimum
Dielectric Strength	50~500VDC:3 times the rated WVDC ; 1K, 2K, 3KVDC:2 times the rated WVDC; 6KVDC:1.5 times the rated WVDC.
Testing Parameters	1MHz ±20%, 1.0Vrms±0.2Vrms

Lead style

Lead type	Lead Code	Lead configuration	Lead type	Lead Code	Lead configuration
Type 1 Straight long lead	B	lead style : B 	Type 4 Inside kink lead	H	lead style : H 
Type 2 Outside kink lead	X	lead style : X 	Type 5 Vertical kink short lead	D	lead style : D 
Type 3 Straight short lead	L	lead style : L 	Type 6 Double outside kink lead	M	lead style : M 

CERAMIC DISC CAPACITOR

CLASS I 50V, 100V, 500V, 1KV, 2KV, 3KV, 6KV TEMPERATURE COMPENSATION TYPE


Manufacturing product range

Cap. Value v.s. Rate voltage, Product diameter & Type

Photo:





T.C	SL (CLASS I, Temperature:+20°C~+85°C, T.C.C.: -1000 ~ +350ppm/°C)																			
Rate voltage	50V(SL500);100V(SL101)							500V(SL501)					1KV(SL102)				2KV(SL202)			
Dφ(Code)	040	050	060	070	080	090	100	050	060	070	080	100	050	060	070	080	060	070	080	
D max. (mm)	5.0	6.0	7.0	8.0	9.0	10.0	11.0	6.0	7.0	8.0	9.0	11.0	6.0	7.0	8.0	9.0	7.5	8.5	9.5	
T max. (mm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4.0	4.0	4.0	4.0	4.0	4.5	4.5	4.5	4.5	4.5	4.5	4.5	
8	080							080												
10	100							100					100							
12	120							120					120							
15	150							150					150						150	
18	180							180					180						180	
20	200							200					200						200	
22	220							220					220						220	
24	240							240					240						240	
27	270							270					270						270	
30	300							300					300						300	
33	330							330					330						330	
36	360							360					360						360	
39	390							390					390						390	
47	470							470					470						470	
51	510							510					510						510	
56	560							560					560						560	
68	680							680					680						680	
75	750							750						750					750	
82	820							820						820					820	
100	101							101						101					101	
120		121							121						121					121
150		151							151							151				151
180		181								181						181				
200			201							201								201		
220			221							221								221		
240			241								241									
270				271							271									
300				301							301									
330				331							331									
360				361								361								
390				391									391							
470					471															
500						501														
510						511														
560						561														
680							681													
750							751													
820							821													
φd (mm)	0.55±0.05																			
Packing	TAPING or BULK							TAPING or BULK					TAPING or BULK				TAPING or BULK			
Coating	Phenolic Resin										Phenolic or Epoxy Resin					Epoxy Resin				


Marking	1	2	3		4	5	6
	Temperature characteristic	Nominal capacitance	Rated voltage		Capacitance tolerance	Manufacturer's identification	Halogen and Pb free
	SL : No marking.	Identified by 3-figure code. Ex. 8pF → "8" 100 pF → "101"	50V/100V	Marked as underline	D:±0.5pF J:±5%	Shall be marked as "UK", but when Dφ≤060 shall be omitted.	There is a "_" marking under the code "V" as the coating is Halogen and Pb free Epoxy
			500V	No marking (is blank)			
			1000V	Marked "1kV"			
			2000V	Marked "2kV"			

CERAMIC DISC CAPACITOR

CLASS I 50V, 100V, 500V, 1KV, 2KV, 3KV, 6KV TEMPERATURE COMPENSATION TYPE

Manufacturing product range Cap. Value v.s. Rate voltage, Product diameter & Type	Photo: SL302	SL602
		

T.C.	SL (Temperature:+20°C~+85°C, T.C.C.: -1000 ~ +350 ppm/°C)					
Rate voltage	3KV(SL302)			6KV(SL602)		
Dφ(Code)	060	070	080	060	070	080
D max. (mm)	7.5	8.5	9.5	7.5	8.5	9.5
T max. (mm)	5.0	5.0	5.0	5.0	5.0	5.0
10	100			100		
12	120			120		
15	150			150		
18	180			180		
20	200			200		
22	220			220		
24	240					
27	270			270		
30	300			300		
33	330			330		
36	360					
39	390			390		
47		470			470	
51		510			510	
56		560			560	
62		620				
68		680				680
75			750			
82			820			820
100			101			101
φd (mm)	0.55±0.05					
Packing	TAPING or BULK					
Coating	Epoxy Resin					

	1	2	3	4	5	6
	Temperature characteristic	Nominal capacitance	Capacitance tolerance	Rated voltage	Manufacturer's identification	Halogen and Pb free
	SL : No marking	1. Cap.≥100pF Ex. 120pF →"121" 2. Cap<100pF, Ex. 22pF→"22"	D: ±0.5pF J: ±5%	3000V : Be marked "3kV" 6000V : Be marked "6kV"	Shall be marked as "UK", but when Dφ≤ 060 shall be omitted.	When the epoxy resin is Halogn and Pb free, there is a "-"marking.
	Definition of date code marking:					
	7	8	9	10	11	12
	Supplier of Epoxy	No. of test equipment	Factory of manufacture	Year of manufacture	Month of manufacture	Week of manufacture by month
<: K-company		1~9: No.1~No.9, J: No.10, K: No.11, L: No.12	C: GZ Plant D: DL Plant	5:2015, 6:2016, 7:2017,	1~9:January~ September, O: October, N: November, D: December	week 1: - week 2: • week 3: : week 4: ' week 5: ;

CERAMIC DISC CAPACITOR

CLASS II 50V, 100V, 500V, 1KV, 2KV, 3KV Hi-K TYPE







Features

- Capacitance has non-linear temperature coefficient.
- Large capacitance in small size.
- Epoxy Coating for 1KV, 2KV and 3KV parts (equivalent to UL94V-0 standards).
- RoHS Compliance.
- Halogen free products are available.
- Wide range of general purposes applications.

General specification

Capacitance Range	100pF to 22000pF (See page 6 to page 9)
Capacitance Tolerance	±10%(for Y5P), ±20%(for Z5U), +80% -20%(for Z5U&Z5V&Y5V)
Operating Temperature Range	-25°C~ +85°C(Y5P,Y5V) ; 10°C~ +85°C(Z5U, Z5V)
Rated Voltage	50,100, 500,1000, 2000, 3000VDC
Dissipation Factor (tan δ)	Y5P, Z5U : tanδ≤2.5%, Z5V, Y5V : tanδ≤5.0%
Insulation Resistance (IR) @ 25°C	10,000 MΩMinimum or 200 MΩμF whichever is smaller
Dielectric Strength	50~500VDC: 2.5 times the rated WVDC; 1K, 2K, 3KVDC: 2 times the rated WVDC
Testing Parameters	1KHz ±20%, 1.0Vrms±0.2Vrms

Lead style

Lead type	Lead Code	Lead configuration	Lead type	Lead Code	Lead configuration
Type 1 straight long lead	B	lead style : B 	Type 4 Inside kink lead	H	lead style : H 
Type 2 Outside kink lead	X	lead style : X 	Type 5 Vertical kink short lead	D	lead style : D 
Type 3 straight short lead	L	lead style : L 	Type 6 Double outside kink lead	M	lead style : M 

CERAMIC DISC CAPACITOR

CLASS II 50V, 100V, 500V, 1KV, 2KV, 3KV Hi-K TYPE

Manufacturing product range
Cap. Value v.s. Rate voltage, product diameter & type

Photo:



T.C.	Y5P (CLASS II, Temperature:-25°C~+85°C, T.C.C.:±10%)																											
Rate voltage	50V(YP500) & 100V(YP101)								500V(YP501)								1KV(YP102)						2KV(YP202)					
Dφ(Code)	040	050	060	070	080	090	100	040	050	060	070	080	090	100	110	130	050	060	070	080	100	120	060	080	090	100	130	140
D max. (mm)	4.5	5.5	6.5	7.5	8.5	9.5	11.0	4.5	5.5	6.5	7.5	9.0	10.0	11.0	12.0	14.0	6.0	7.0	8.0	9.0	11.0	13.0	7.5	9.5	10.5	11.5	14.5	15.5
T max. (mm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.0	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
100	101							101								101						101						
120	121							121								121						121						
150	151							151								151						151						
180	181							181								181						181						
200	201							201								201						201						
220	221							221								221						221						
240	241							241								241						241						
270	271							271								271						271						
330	331							331								331						331						
390	391							391								391						391						
470	471							471								471						471						
560	561							561								561						561						
680	681							681									681					681						
820	821								821								821						821					
1000	102								102								102						102					
1200		122								122								122						122				
1500		152								152								152						152				
1800		182									182								182					182				
2000		202									202								202					202				
2200		222									222								222					222				
2700			272									272								272					272			
3000			302									302								302						302		
3300			332										332							332						332		
3900				392									392								392					392		
4700				472										472							472						472	
5000					502									502														
5600					562									562														
6800						682									682													
8200							822														822							
10000							103																					103
φd (mm)	0.55±0.05																											
Packing	TAPING or BULK								BULK								TAPING or BULK						BULK					
Coating	Phenolic Resin														Phenolic or Epoxy Resin													

Marking	1	2	3		4	5	6
	Temperature characteristic	Nominal capacitance	Rated voltage		Capacitance tolerance	Manufacturer's identification	Halogen and Pb free
	Be marked "B".	Identified by 3-figure code. Ex. 1000pF→"102" 3300pF→"332"	50V/100V	Marked as underline	K:±10%	Shall be marked as "UK", but when Dφ ≤060 shall be omitted.	There is a "_" marking under the code "V" as the coating is Halogen and Pb free Epoxy.
			500V	No marking (is blank)			
			1000V	Marked "1kV"			
			2000V	Marked "2kV"			

CERAMIC DISC CAPACITOR


CLASS II 50V, 100V, 500V, 1KV, 2KV, 3KV Hi-K TYPE

Manufacturing product range
Cap. Value v.s. Rate voltage, product diameter & type

Photo:



T.C.	Z5U (CLASS II, Temperature: +10°C~+85°C, T.C.C.: +22~-56%)																	
	50V(ZU500)&100V(ZU101)				500V(ZU501)				1KV(ZU102)				2KV(ZU202)					
Rate voltage																		
Dφ(Code)	040	050	060	070	050	060	070	090	050	070	090	100	060	070	080	090	110	130
D max. (mm)	4.5	5.5	6.5	7.5	5.5	6.5	7.5	9.5	6.0	8.0	10.0	11.0	7.5	8.5	9.5	10.5	12.5	14.5
T max. (mm)	3.5	3.5	3.5	3.5	4.0	4.0	4.0	4.0	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5	4.5
1000					102				102				102					
1200					122				122				122					
1500					152				152				152					
2200	222				222				222				222					
2700	272				272				272				272					
3300	332					332			332				332					
3600	362					362			362						362			
3900	392					392			392						392			
4700	472						472		472						472			
5000		502							502									
5600							562										562	
6800							682				682						682	
8200			822									822						822
10000				103				103				103						103
φd (mm)	0.55±0.05																	
Packing	TAPING or BULK																	BULK
Coating	Phenolic Resin						Phenolic or Epoxy Resin						Epoxy Resin					

Marking	1	2	3		4	5	6
	Temperature characteristic	Nominal capacitance	Rated voltage		Capacitance tolerance	Manufacturer's identification	Halogen and Pb free
	Be marked "E".	Identified by 3-figure code. Ex. 1000pF→"102" 3300pF→"332"	50V/100V	Marked as underline	M:±20% Z:-20~+80%	Shall be marked as "UK", but when Dφ ≤060 shall be omitted.	There is a " " marking under the code "V" as the coating is Halogen and Pb free Epoxy.
			500V	No marking (is blank)			
			1000V	Marked "1kV"			
			2000V	Marked "2kV"			

CERAMIC DISC CAPACITOR

CLASS II 50V, 100V, 500V, 1KV, 2KV, 3KV Hi-K TYPE

Manufacturing product range
Cap. Value v.s. Rate voltage, product diameter & type

Photo:





T.C.	Z5V (CLASS II, Temperature: +10°C~+85°C, T.C.C.: +22~82%)								
Rate voltage	50V(ZV500) & 100V(ZV101)				500V(ZV501)	1KV(ZV102)			2KV(ZV202)
Dφ (Code)	050	060	070	080	080	060	080	100	120
D max. (mm)	5.5	6.5	7.5	8.5	9.0	7.0	9.0	11.0	13.5
T max. (mm)	3.5	3.5	3.5	3.5	4.0	4.5	4.5	4.5	4.5
1000	102								
1500	152					152			
2200	222					222			
2700	272					272			
3300	332					332			
3900	392						392		
4700	472						472		
10000		103			103			103	103
20000			203						
22000				223					
φd (mm)	0.55±0.05								
Packing	TAPING or BULK								BULK
Coating	Phenolic Resin					Phenolic or Epoxy Resin			Epoxy Resin

T.C.	Y5V (CLASS II, Temperature: -25°C~+85°C, T.C.C.: +22% ~82%)												
Rate voltage	50V(YV500)				100V(YV101)			500V(YV501)			1KV(YV102)	2KV(YV202)	
Dφ(Code)	040	050	060	080	040	050	060	050	070	080	100	070	120
D max. (mm)	4.5	5.5	6.6	8.5	4.5	5.5	6.6	5.5	7.5	8.5	11.0	8.5	13.5
T max. (mm)	3.5	3.5	3.5	3.5	3.5	3.5	3.5	4.0	4.0	4.0	4.5	5.0	5.0
1000	102				102							102	
2200		222				222		222				222	
4700		472				472			472				
10000			103				103			103	103		103
22000				223									
φd (mm)	0.55±0.05												
Packing	TAPING or BULK											BULK	
Coating	Phenolic Resin									Phenolic or Epoxy Resin		Epoxy Resin	


Marking	1	2	3		4	5	6
	Temperature characteristic	Nominal capacitance	Rated voltage		Capacitance tolerance	Manufacturer's identification	Halogen and Pb free
	Z5V, Y5V: the logo is "F", but the "F" shall be omitted.	Identified by 3-figure code. Ex. 1000pF→"102" 3300pF→"332" 4700pF→"472"	50V/100V	Marked as underline	M:±20% Z:-20~+80%	Shall be marked as "UK", but when Dφ≤060 shall be omitted	There is a "_" marking under the code "V" as the coating is Halogen and Pb free Epoxy.
			500V	No marking (is blank)			
			1000V	Marked "1kV"			
			2000V	Marked "2kV"			
			2000V	Marked "2kV"			

CERAMIC DISC CAPACITOR

CLASS II 50V, 100V, 500V, 1KV, 2KV, 3KV Hi-K TYPE

Manufacturing product range Cap. Value v.s. Rate voltage, product diameter & type	Photo: Y5P Z5U  
--	--

T.C.	Y5P (CLASS II, Temperature: -25°C~+85°C, T.C.C.: ±10%)					Z5U (CLASS II, Temperature: +10°C~+85°C, T.C.C.: +22~-56%)						
Rate voltage	3KV(YP302)					3KV(ZU302)						
Dφ (Code)	060	070	090	110	130	060	080	100	110	120	140	170
D max. (mm)	8.0	9.0	11.0	13.0	15.0	8.0	10.0	12.0	13.0	14.0	16.0	19.0
T max. (mm)	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
100	101											
120	121											
150	151											
180	181											
220	221											
270	271											
330	331											
390		391										
470		471										
560		561										
680			681									
820			821									
1000			102			102						
1200				122			122					
1500				152			152					
1800				182			182					
2200					222		222					
2700								272				
3300								332				
3900									392			
4700										472		
5600											562	
6800											682	
φd (mm)	0.55±0.05											
Packing	TAPING or BULK											
Coating	Epoxy Resin											



1	2	3	4	5	6
Temperature characteristic	Nominal capacitance	Capacitance tolerance	Rated voltage	Manufacturer's identification	Halogen and Pb free
Y5P : Be marked "B" Z5U : Be marked "E"	Identified by 3-figure code when Cap. ≥100pF Ex. 1000pF → "102"	K: ±10% (for Y5P) M: ±20% (for Z5U)	3000V : Be marked "3kV"	Shall be marked as "UK", but when Dφ ≤ 060 shall be omitted	When the epoxy resin is Halogen and Pb free, there is a "-" marking.
Definition of date code marking:					
7	8	9	10	11	12
Supplier of Epoxy	No. of test equipment	Factory of manufacture	Year of manufacture	Month of manufacture	Week of manufacture by month
<: K-company	1~9: No.1~No.9, J: No.10, K: No.11, L: No.12	C: GZ Plant D: DL Plant	5:2015, 6:2016, 7:2017,	1~9: January~September, O: October, N: November, D: December	week 1: - week 2: • week 3: : week 4: ' week 5: ;

CERAMIC DISC CAPACITOR


CLASS III SEMI-CONDUCTIVE TYPE

CERAMIC DISC CAPACITOR

CLASS III SEMI-CONDUCTIVE TYPE

Features

- Large capacitance in small size
- Low lost at wide range of frequency
- Cost saving by placing film capacitors
- Capacitance has linear temperature coefficient
- Stable capacitance change over specified temperature range
- RoHS Compliance
- Halogen free products are available



General specification

Capacitance Range	100000pF
Capacitance Tolerance	+80%-20%
Operating Temperature Range	-25°C ~+ 85°C
Rated Voltage	16, 25 & 50 VDC
Dissipation Factor (tan δ)	Y5V 16V.....tan δ≤7.5%; Y5V 25/50V.....tan δ≤5.0%
Insulation Resistance (IR) @ 25°C	16V.....100MΩ Minimum or 10MΩμF 25/50V...1000MΩ Minimum or 20MΩμF
Dielectric Strength	2 times the rated WVDC
Testing Parameters	1KHz±20%, 0.1Vrms Maximum

Capacitance chart

Manufacturing Product Range				
T.C.	FY (Y5V) CLASS III			
Rate voltage	16V	25V	50V	
Dφ(Code)	060	060	060	
D max. (mm)	7.0	7.0	7.0	
T max. (mm)	3.5	3.5	3.5	
0.1uF	104	104	104	
φd (mm)	0.55±0.05			
Packing	TAPING or BULK			
Coating	Phenolic Resin			

Marking	1	2	3		4	5
	Temperature characteristic	Nominal capacitance	Rated voltage		Capacitance tolerance	Manufacturer's identification
	Y5V; the product logo is "F", but it is omitted on marking.	Identified by 3-figure code. 0.1uF → "104"	16V/25V	Marked with code: 16V → "16V" 25V → "25V"	Z: -20~+80%	50V: Shall be marked as "UK", 16V&25V shall be omitted.
			50V	Marked as underline		

CERAMIC DISC CAPACITOR 1KV, 2KV, 3KV LOW DISSIPATION LB, LR TYPE







Features

- Reduced heat dissipation permitted due to small dielectric loss of the ceramic material.
- Operating temperature range is guaranteed up to 125 degree C.
- Coated with flame-retardant epoxy resin (equivalent to UL94V-0 standards).
- RoHS Compliance.
- Halogen free products are available.
- Ideal for use on high frequency pulse circuits such as a horizontal resonance circuit for CTV and snubber circuits for switching power supplies.

General specification

Capacitance Range	100pF to 4700pF (See page 12 to page 13)
Capacitance Tolerance	±10%,
Operating Temperature Range	-25°C~ +125°C
Rated Voltage	1K, 2K, 3K VDC
Dissipation Factor (tan δ)	LB: tan δ ≤ 0.5% ; LR: tan δ ≤ 0.2%
Insulation Resistance (IR) @ 25°C	10000MΩ Minimum or 200MΩμF whichever is smaller (500VDC, 60sec)
Dielectric Strength	2 times the rated WVDC
Testing Parameters	1KHz ±20%, 1.0Vrms±0.2Vrms

Lead style

Lead type	Lead Code	Lead configuration	Lead type	Lead Code	Lead configuration
Type 1 straight long lead	B	lead style : B 	Type 4 Inside kink lead	H	lead style : H 
Type 2 Outside kink lead	X	lead style : X 	Type 5 Vertical kink short lead	D	lead style : D 
Type 3 straight short lead	L	lead style : L 	Type 6 Double outside kink lead	M	lead style : M 

CERAMIC DISC CAPACITOR

1KV, 2KV, 3KV LOW DISSIPATION LB, LR TYPE

LB Series:


Part Number	Rated Voltage.	Cap. in pF	Cap. Tol. (%)	Dimensions in mm	
				D max.	T Max.
LB102101K050□□□□□	1000VDC	100	±10%	6.5	4.5
LB102151K050□□□□□	1000VDC	150	±10%	6.5	4.5
LB102181K050□□□□□	1000VDC	180	±10%	6.5	4.5
LB102221K050□□□□□	1000VDC	220	±10%	6.5	4.5
LB102271K050□□□□□	1000VDC	270	±10%	6.5	4.5
LB102331K050□□□□□	1000VDC	330	±10%	6.5	4.5
LB102391K050□□□□□	1000VDC	390	±10%	6.5	4.5
LB102471K050□□□□□	1000VDC	470	±10%	6.5	4.5
LB102561K050□□□□□	1000VDC	560	±10%	6.5	4.5
LB102681K060□□□□□	1000VDC	680	±10%	7.5	4.5
LB102821K060□□□□□	1000VDC	820	±10%	7.5	4.5
LB102102K060□□□□□	1000VDC	1000	±10%	7.5	4.5
LB102152K070□□□□□	1000VDC	1500	±10%	8.5	4.5
LB102182K070□□□□□	1000VDC	1800	±10%	8.5	4.5
LB102222K080□□□□□	1000VDC	2200	±10%	9.5	4.5
LB102332K100□□□□□	1000VDC	3300	±10%	11.5	4.5
LB202101K050□□□□□	2000VDC	100	±10%	6.5	5.0
LB202151K050□□□□□	2000VDC	150	±10%	6.5	5.0
LB202221K050□□□□□	2000VDC	220	±10%	6.5	5.0
LB202271K050□□□□□	2000VDC	270	±10%	6.5	5.0
LB202331K050□□□□□	2000VDC	330	±10%	6.5	5.0
LB202391K050□□□□□	2000VDC	390	±10%	6.5	5.0
LB202471K050□□□□□	2000VDC	470	±10%	6.5	5.0
LB202561K060□□□□□	2000VDC	560	±10%	7.5	5.0
LB202681K060□□□□□	2000VDC	680	±10%	8.5	5.0
LB202821K070□□□□□	2000VDC	820	±10%	8.5	5.0
LB202102K070□□□□□	2000VDC	1000	±10%	8.5	5.0
LB202122K070□□□□□	2000VDC	1200	±10%	8.5	5.0
LB202152K080□□□□□	2000VDC	1500	±10%	9.5	5.0
LB202182K090□□□□□	2000VDC	1800	±10%	10.5	5.0
LB202222K100□□□□□	2000VDC	2200	±10%	11.5	5.0
LB202272K110□□□□□	2000VDC	2700	±10%	12.5	5.0
LB202332K120□□□□□	2000VDC	3300	±10%	13.5	5.0
LB302101K050□□□□□	3000VDC	100	±10%	6.5	6.0
LB302151K050□□□□□	3000VDC	150	±10%	6.5	6.0
LB302221K050□□□□□	3000VDC	220	±10%	6.5	6.0
LB302331K050□□□□□	3000VDC	330	±10%	6.5	6.0
LB302391K050□□□□□	3000VDC	390	±10%	6.5	6.0
LB302471K060□□□□□	3000VDC	470	±10%	7.5	6.0
LB302561K060□□□□□	3000VDC	560	±10%	7.5	6.0
LB302681K070□□□□□	3000VDC	680	±10%	8.5	6.0
LB302821K080□□□□□	3000VDC	820	±10%	9.5	6.0
LB302102K080□□□□□	3000VDC	1000	±10%	9.5	6.0
LB302152K100□□□□□	3000VDC	1500	±10%	11.5	6.0
LB302222K120□□□□□	3000VDC	2200	±10%	13.5	6.0

CERAMIC DISC CAPACITOR

1KV, 2KV, 3KV LOW DISSIPATION LB, LR TYPE

LR Series:

Part Number	Rated Voltage.	Cap. in pF	Cap. Tol. (%)	Dimensions in mm	
				D max.	T Max.
LR102101K050□□□□□	1000VDC	100	±10%	6.5	4.5
LR102151K050□□□□□	1000VDC	150	±10%	6.5	4.5
LR102221K050□□□□□	1000VDC	220	±10%	6.5	4.5
LR102271K050□□□□□	1000VDC	270	±10%	6.5	4.5
LR102331K050□□□□□	1000VDC	330	±10%	6.5	4.5
LR102391K050□□□□□	1000VDC	390	±10%	6.5	4.5
LR102471K050□□□□□	1000VDC	470	±10%	6.5	4.5
LR102681K060□□□□□	1000VDC	680	±10%	7.5	4.5
LR102821K070□□□□□	1000VDC	820	±10%	8.5	4.5
LR102102K070□□□□□	1000VDC	1000	±10%	8.5	4.5
LR102152K090□□□□□	1000VDC	1500	±10%	10.5	4.5
LR102222K100□□□□□	1000VDC	2200	±10%	11.5	4.5
LR102332K130□□□□□	1000VDC	3300	±10%	14.5	4.5
LR202101K050□□□□□	2000VDC	100	±10%	6.5	5.0
LR202151K050□□□□□	2000VDC	150	±10%	6.5	5.0
LR202221K050□□□□□	2000VDC	220	±10%	6.5	5.0
LR202271K050□□□□□	2000VDC	270	±10%	6.5	5.0
LR202331K060□□□□□	2000VDC	330	±10%	7.5	5.0
LR202391K060□□□□□	2000VDC	390	±10%	7.5	5.0
LR202471K060□□□□□	2000VDC	470	±10%	7.5	5.0
LR202561K070□□□□□	2000VDC	560	±10%	8.5	5.0
LR202681K080□□□□□	2000VDC	680	±10%	9.5	5.0
LR202821K080□□□□□	2000VDC	820	±10%	9.5	5.0
LR202102K090□□□□□	2000VDC	1000	±10%	10.5	5.0
LR202122K100□□□□□	2000VDC	1200	±10%	11.5	5.0
LR202152K110□□□□□	2000VDC	1500	±10%	12.5	5.0
LR202182K120□□□□□	2000VDC	1800	±10%	13.5	5.0
LR202222K130□□□□□	2000VDC	2200	±10%	14.5	5.0
LR202332K160□□□□□	2000VDC	3300	±10%	17.5	5.0
LR302101K050□□□□□	3000VDC	100	±10%	6.5	6.0
LR302151K050□□□□□	3000VDC	150	±10%	6.5	6.0
LR302221K050□□□□□	3000VDC	220	±10%	6.5	6.0
LR302331K060□□□□□	3000VDC	330	±10%	7.5	6.0
LR302391K070□□□□□	3000VDC	390	±10%	8.5	6.0
LR302471K080□□□□□	3000VDC	470	±10%	9.5	6.0
LR302561K080□□□□□	3000VDC	560	±10%	9.5	6.0
LR302681K090□□□□□	3000VDC	680	±10%	10.5	6.0
LR302821K100□□□□□	3000VDC	820	±10%	11.5	6.0
LR302102K100□□□□□	3000VDC	1000	±10%	11.5	6.0
LR302152K130□□□□□	3000VDC	1500	±10%	14.5	6.0
LR302222K150□□□□□	3000VDC	2200	±10%	16.5	6.0

Marking	1	2	3		4	5	6
	Temperature characteristic	Nominal capacitance	Rated voltage		Capacitance tolerance	Manufacturer's identification	Halogen and Pb free
	LB : Be marked "LB" LR : Be marked "LR"	Identified by 3-figure code. Ex. 100pF→"101" 2200pF→"222"	1000V	Marked "1kV"	K:±10%	Shall be marked as "LK", but when $D\phi \leq 060$ shall be omitted	There is a "-" marking under the code "V" as the coating is Halogen and Pb free Epoxy.
			2000V	Marked "2kV"			
			3000V	Marked "3kV"			

LB: Cap. Change: ±10%(-25°C~+85°C), DF:0.5%Max. ; **LR:** Cap. Change:-30%~+15%(-25°C~+125°C), DF:0.2%Max.

CERAMIC DISC CAPACITOR

1KV, 2KV, 3KV LOW DISSIPATION LB, LR TYPE

Caution

1. Caution (Rating):

1.1 Operating Voltage

When dc-rated capacitors are to be used in ac or ripple current circuits, be sure to maintain the V_{p-p} value of the applied voltage or the V_{o-p} which contains dc bias within the rated voltage range.

When the voltage is applied to the circuit, starting or stopping may generate irregular voltage for a transit period because of resonance or switching. Be sure to use a capacitor with a rated voltage range that includes these irregular voltages.

When using the low-dissipation (LB, LR Char.) series in a high-frequency and high-voltage circuit, be sure to read the instructions in item 4.

Voltage	DC Voltage	DC+AC Voltage	AC Voltage	Pulse Voltage (1)	Pulse Voltage (2)
Positional measurement					

1.2 Operating Temperature And Self-Generated Heat

Keep the surface temperature of a capacitor below the upper limit of its rated operating temperature range. be sure to take into account the heat generated by the capacitor itself. When the capacitor is used in a high-frequency current, pulse current or similar current, it may self-generate heat due to dielectric loss. The applied voltage load (*) should be such that the capacitor's self-generated heat is within 20°C at an atmosphere temperature of 25°C. When measuring, use a thermocouple of small thermal capacity-k of $\phi 0.1\text{mm}$ in conditions where the capacitor is not affected by radiant heat from other components or surrounding ambient fluctuations.

Excessive heat may lead to deterioration of the capacitor's characteristics and reliability. (Never attempt to perform measurement with the cooling fan running. otherwise, accurate measurement cannot be ensured.)

1.3 Fail-Safe

When capacitor is broken, failure may result in a short circuit. Be sure to provide an appropriate fail-safe function like a fuse on your product if failure would follow an electric shock, fire or fume.

1.4 Load Reduction and Self-generated Heat During

Application of High-frequency and High-voltage

Due to the low self-heating characteristics of low dissipation capacitors, the allowable electric power of these capacitors is generally much higher than that of B characteristic capacitors. However, in case the self heating temperature is 15°C under a high-frequency voltage whose peak-to-peak value equals the capacitor's rated voltage, the capacitor's power consumption may exceed it's allowable electric power.

Therefore, when using the Low D.F. series in a high-frequency and high-voltage circuit with a frequency of 1kHz or higher, make sure that the V_{p-p} values including the DC bias, do not exceed the applied voltage value specified in Table 1. Also make sure that the self-heating temperature (the difference between the capacitor's surface temperature and the capacitor's ambient temperature) at an ambient temperature of 25°C does not exceed the value specified in Table 1.

As shown in Fig. 2, the self-heating temperature depends on the ambient temperature. Therefore, if you are not able to set the ambient temperature to approximately 25°C, please contact our sales representatives or product engineers.

[Table 1] Allowable conditions at high frequency

Series	DC rated voltage	Allowable conditions at High-frequency *3		Capacitor's ambient temp. *2
		Applied voltage (Max.)	Self-heating temp. (25°C ambient temp.)*1	
LB, LR	1KV	600Vp-p	15°CMax.	-25 ~ +125°C
		1000Vp-p	5°CMax.	
	2KV	1000Vp-p	10°CMax.	
		2000Vp-p	5°CMax.	
	3KV	3000Vp-p	5°CMax.	

- Fig. 1 shows the relationship between the applied voltage and the allowable self-heating temperature regarding 1 to 3KV rated voltage of the low D.F.series LB、LR characteristic.
- Fig. 2 When the ambient temperature is 85 to 125°C, the applied voltage needs to be further reduced. If the low D.F. series needs o be used at an ambient temperature of 85 to 125°C, please contact our sales representatives or product engineers.
- Fig. 3 shows reference data on the allowable voltage-frequency characteristic for a sine wave voltage.Failure to follow the above cautions (items 1.1 to 1.4) may result, worst case, in a short circuit and cause fuming or partial dispersion when the product is used.

**Fig 1: Relationship Between Applied Voltage and Self-heating Temperature
(Allowable Self-heating Temp. at 25°C Ambient Temp.)**

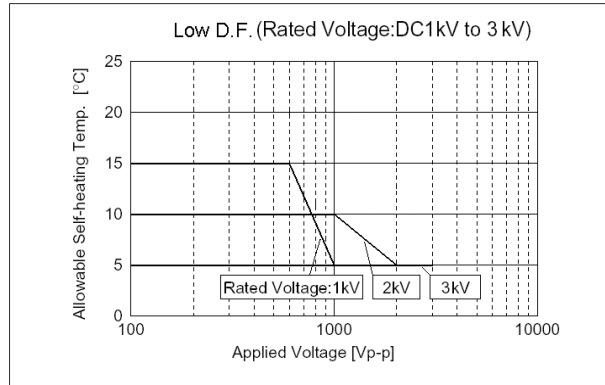


Fig 2: Dependence of Self-heating Temperature on Ambient Temperature

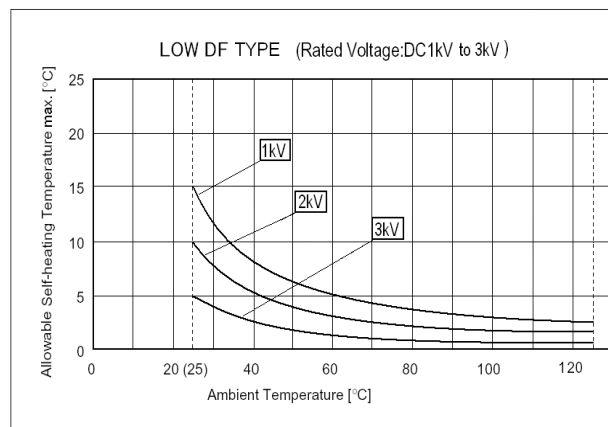
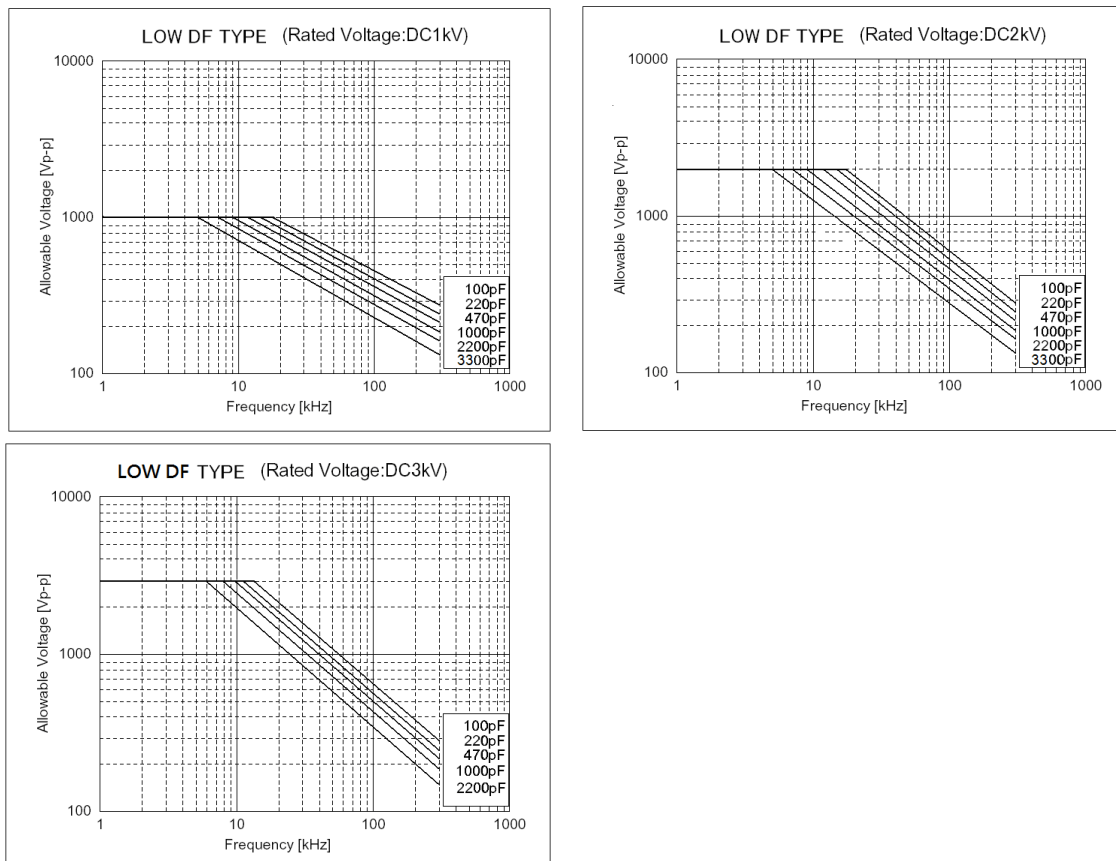


Fig 3: Allowable Voltage (Sine Wave Voltage)- Frequency Characteristics (At Ambient Temperature of 85°C or less)



CERAMIC DISC CAPACITOR

1KV, 2KV, 3KV LOW DISSIPATION LB, LR TYPE

Because of influence of harmonics, when the applied voltage is a rectangular wave or pulse wave voltage (instead of a sine wave voltage), the heat generated by the capacitor is higher than the value obtained by application of the sine wave with the same fundamental frequency. Roughly calculated for reference, the allowable voltage for a rectangular wave or pulse wave corresponds approximately to the allowable voltage for a sine wave whose fundamental frequency is twice as large as that of the rectangular wave or pulse wave. This allowable voltage, however, varies depending on the voltage and current waveforms.

Therefore, you are requested to make sure that the self-heating temperature is not higher than the value specified in Table 1.

2. Caution (Storage And Operating Condition):

Operating And Storage Environment

The insulating coating of capacitors does not form a perfect seal; therefore, do not use or store capacitors in a corrosive atmosphere, especially where chloride gas, sulfide gas, acid, alkali, salt or the like are present. And avoid exposure to Moisture. Before cleaning, bonding or molding this product, verify that these processes do not affect product quality by testing the performance of a cleaned, bonded or molded product in the intended equipment. Store the capacitors where the temperature and relative humidity do not exceed -10 to 40 degrees centigrade and 15 to 85 %.

Use capacitors within 6 months.

Failure to follow the above cautions may result, worst case, in a short circuit and cause fuming or partial dispersion when the product is used.

3. Caution (Soldering And Mounting)

3.1 Vibration And Impact

Do not expose a capacitor or its leads to excessive shock or vibration during use.

3.2 Soldering

When soldering this product to a Pcb / Pwb, do not exceed the solder heat resistance specification of the capacitor. Subjecting this product to excessive heating could melt the internal junction solder and may result in thermal shocks that can crack the ceramic element. When soldering capacitor with a soldering iron, it should be performed in following conditions.

Temperature of iron-tip: 400 °C Max.

Soldering iron wattage: 50W Max.

Soldering time: 3.5 sec. Max.

Failure to follow the above cautions may result, worst case, in a short circuit and cause fuming or partial dispersion when the product is used.

4. Caution (Handling)

Vibration and Impact

Do not expose a capacitor or its leads to excessive shock or vibration during use.

Failure to follow the above cautions may result, worst case, in a short circuit and cause fuming or partial dispersion when the product is used.

Notice

1. Notice (Soldering And Mounting)

Cleaning (Ultrasonic cleaning)

To perform ultrasonic cleaning, observe the following conditions.

Rinse bath capacity: output of 20-watts per liter or less.

Rinsing time: 5 min. Maximum.

Do not vibrate the Pcb/Pwb directly.

Excessive ultrasonic cleaning may lead to fatigue destruction of the lead wires.

2. Notice (Rating)

Low D.F. series

Capacitance might change greatly depending on the surrounding temperature or an applied voltage. So, it is not likely to be suitable for use in a time constant circuit. Please contact us if you need detailed information.

SAFETY STANDARD CERAMIC CAPACITOR SAP Part Number Explanation

To order, please also specify Pan Overseas Part No. as the following example for SAP system :

YV	0AC	472	M	10	0	L	20	C	7	H
1	2	3	4	5	6	7	8	9	10	11

1. Temperature characteristic (identified code):

CODE	SL	YP (Y5P)	YU (Y5U)	YV (Y5V)
Cap. Change (%)	-1000~+350ppm/°C(+20°C~+85°C)	±10%	+20%to -55%	+30%to -80%

2. TYPE (identified by 3-figure code):

0AC=AC(X1-400V~/Y2-250V~); 1AC=AC(X1-440V~/Y2-300V~)(only approval for VDE//ENEC/UL/CSA)

0AH=AH(X1-400V~/Y1-250V~); 1AH=AH(X1-400V~/Y1-400V~)

0AS=AS(X1-760V~/Y1-500V~) (Only approval for VDE//ENEC/UL/CUL)

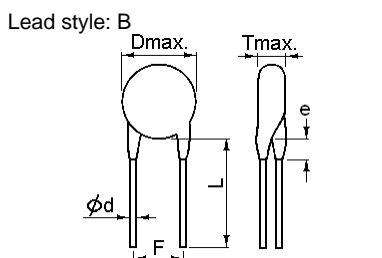
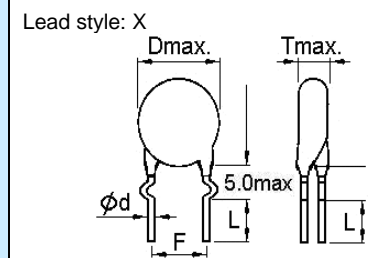
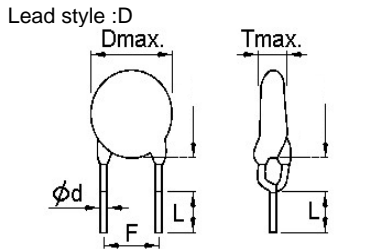
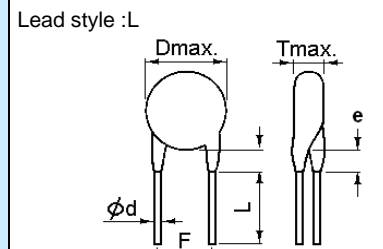
3. Capacitance (identified by 3-figure code)

4. Capacitance tolerance (identified by code)

5. Nominal body diameter dimension (identified by 2-figure code)

6. Internal control code:0—Normal, other code—Special control

7. Lead Style:

Lead type & Code	Lead Configuration	Lead type & Code	Lead Configuration
Type B Straight long lead	Lead style: B 	Type X Outside kink lead	Lead style: X 
Type D Vertical kink short lead	Lead style :D 	Type L Straight short lead	Lead style :L 

8. Packing mode and lead length (identified by 2-figure code)

Taping Code	Description
AM	Box and Pitch : 25.4 mm (10.0mm)
AF	Box and Pitch : 15.0 mm (Pitch=7.5mm)

Bulk Code	Description
3E	lead length L : 3.5mm
04	lead length L : 4.0mm
4E	lead length L : 4.5mm
20	lead length L : 20mm

9. Length tolerance

Code	Description
A	±0.5 mm (only for kink lead type)
B	±1.0 mm
C	MIN.
D	Taping special purpose

10. Pitch

Code	Description
7	7.5±1.0 mm
0	10±1.0 mm

11. Epoxy Resin Code

Code	Description
H	Halogen and Pb free, epoxy resin (Ag electrode)
T	Halogen and Pb free, epoxy resin (Cu electrode)

SAFETY STANDARD CERAMIC CAPACITOR

AH and AS Type-Class X1/Y1; AC Type-Class X1/Y2

SAFETY STANDARD CERAMIC CAPACITOR: AH and AS Type-Class X1/Y1; AC Type-Class X1/Y2

Introduction

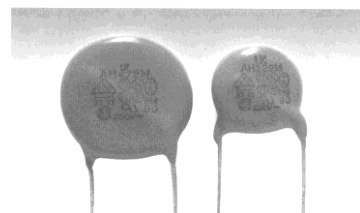
Ideal for use as X/Y capacitors for AC line filters and primary-secondary coupling on switching power Supplies and AC adapters applications.

Having internationally recognized safety certifications, these capacitors are well-suited for applications that require keeping potentially disruptive or damaging line transients and EMI out of susceptible equipment.

They are also an ideal solution in situations where there is a need to suppress line disturbances at the power.

Features

- Compact size
- Cost effective products
- Ideal for across the line applications
- Safety Standard Recognized for AC applications
- Coated with flame-retardant epoxy resin (equivalent to UL94V-0 standards)
- RoHS Compliance
- Halogen free products are available



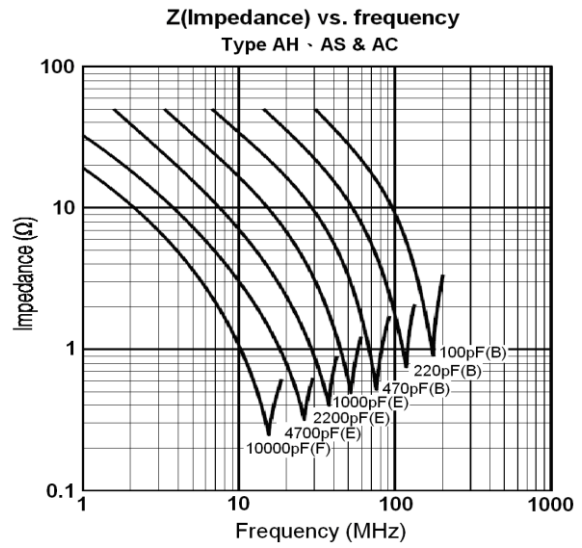
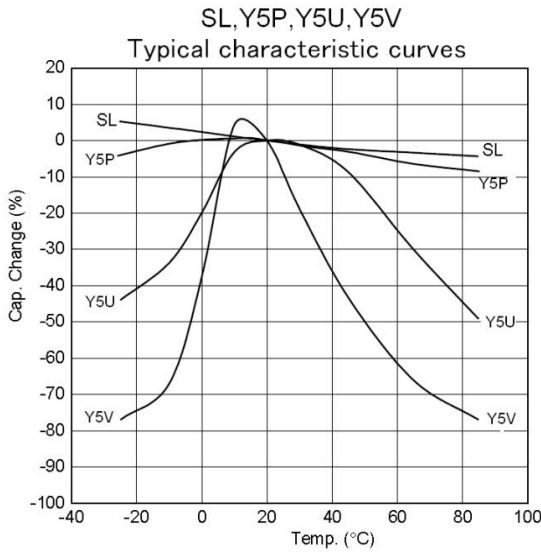
Approval standards

Agencies	UL	CSA	CQC	KTL	VDE,ENEC, SEMKO, NEMKO, DEMKO, FIMKO, SEV, KEMA
Standard No.	UL60384-14: 2014	E60384-14:14	IEC60384-14: 2005	K60384-14	IEC384-14 4 th Edition
Rated Voltage	0AC = AC(X1:400V~/Y2:250V~) 1AC = AC(X1:440V~/Y2:300V~) 0AH = AH(X1:400V~/Y1:250V~) 1AH = AH(X1:400V~/Y1:400V~) 0AS = AS(X1:760V~/Y1:500V~)				
Capacitance Value(pF)	AH: 2 ~ 4700; AC: 2 ~10000; AS: 100~4700				

General specification

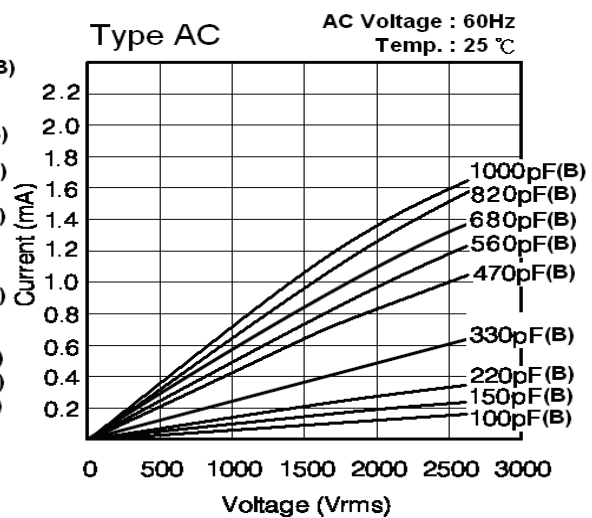
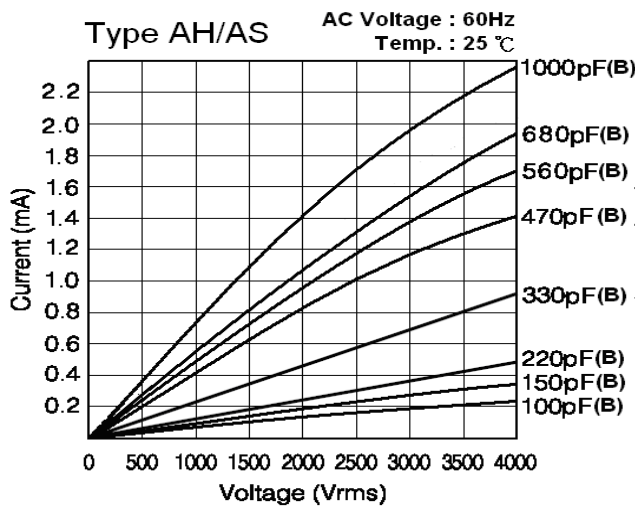
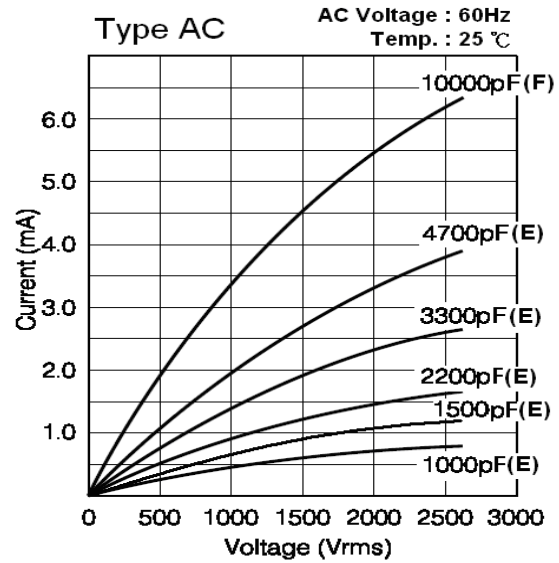
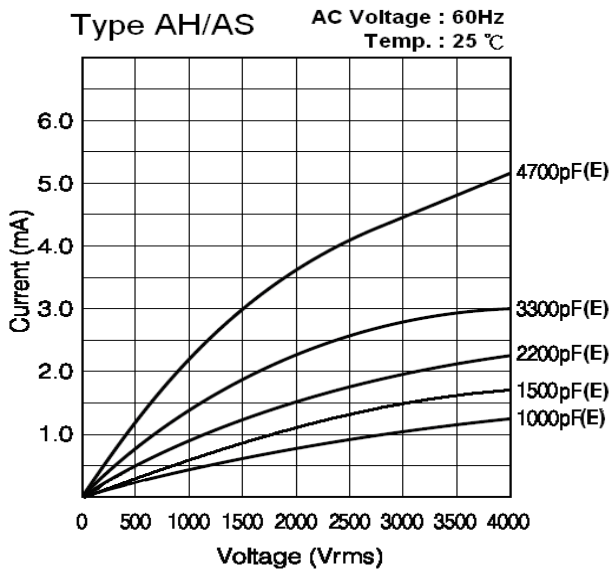
Capacitance Range	AH:10pF to 4700pF; AC:10pF to 10000pF; AS: 100pF to 4700pF
Capacitance Tolerance	±0.25pF, ±0. 5pF, ±5%, ±10%, ±20%
Operating Temperature Range	-40°C~ +125°C
Temperature Coefficient (ΔC Max)	-1000~+350ppm/°C(SL), ±10% (Y5P), +30 ~80% (Y5V), +20~55% (Y5U)
Voltage Resistance	AH Type: X1:400Vac / Y1:400Vac or 250Vac ; AC Type: X1:400Vac or 440Vac / Y2:250VAC or 300Vac AS Type: X1:760Vac / Y1:500Vac
Dissipation Factor(tanδ) or Q	SL: 30pF&above:Q≥1000 Below 30pF:Q≥400+20×C @20°C, 1MHz, 1±0.2Vrms Y5P: tanδ=2.5% Max. @20°C, 1KHz, 1±0.2Vrms Y5U: tanδ=2.5% Max. @20°C, 1KHz, 1±0.2Vrms Y5V: tanδ=5.0% Max. @20°C, 1KHz, 1±0.2Vrms
Insulation Resistance	10000MΩ at 500VDC for 60 Seconds
Dielectric Strength	1500VAC for 60 Seconds (AC TYPE) (For Lead Pitch=5.0mm)
	2600VAC for 60 Seconds (AC TYPE) (For Lead Pitch=7.5 & 10 mm)
	4000VAC for 60 Seconds (AH,AS TYPE) (For Lead Pitch=10.0mm & 12.5mm)

Typical characteristic curves & Z(Impedance) vs. frequency :



Note: Above data are just for reference not assured ones.

Leakage Current Characteristics (AH and AS: ~4000V / AC: ~2600V):



Note: Above data are just for reference not assured ones

SAFETY STANDARD CERAMIC CAPACITOR

Detail Specification

AH Type-Class X1/Y1 (Normal for standard parts):


Part Number	Temp. Char.	Cap.(pF)	Tol.	Dimension (mm)			
				D Max.	T Max.	F±1	Wire Dia. (φd)
YP *AH101K060	Y5P	100	±10%	7.0	5.0	10.0	0.55±0.05
YP *AH151K060		150		7.0			
YP *AH221K060		220		7.0			
YP *AH331K060		330		7.0			
YP *AH471K070		470		8.0			
YP *AH561K080		560		9.0			
YP *AH681K080		680		9.0			
YP *AH102K100		1000		11.0			
YU *AH681M060	Y5U	680	±20%	7.0	5.0	10.0	0.55±0.05
YU *AH102M070		1000		8.0			
YU *AH152M080		1500		9.0			
YU *AH222M090		2200		10.0			
YU *AH332M110		3300		12.0			
YU *AH392M120		3900		14.0			
YU *AH472M130		4700		14.0			
YV *AH102M060	Y5V	1000	±20%	7.0	5.5	10.0	0.55±0.05
YV *AH152M070		1500		8.0			
YV *AH222M080		2200		9.0			
YV *AH332M100		3300		11.0			
YV *AH472M110		4700		12.0			
SL *AH ***J060	SL	10,12,15,18,20,22,24,27,30,33,36,39	±5%	7.0	5.0	10.0	0.55±0.05
SL *AH ***J070		47,50,51,56,62		8.0			
SL *AH ***J080		68,75		9.0			
SL *AH***J090		82,100		10.0			

AS Type-Class X1/Y1 (Normal for standard parts):

SAP P/N	T.C.	Capacitance(pF)	Tolerance	Dimension (unit:mm)			
				D(max.)	T(max.)	F	Φd
YP*AS101K070*	Y5P	100 pF	±10%	8.0	7.0	10.0	0.55+/-0.05
YP*AS151K070*		150 pF		8.0			
YP*AS221K070*		220 pF		8.0			
YP*AS331K070*		330 pF		8.0			
YP*AS471K080*		470 pF		9.0			
YP*AS561K090*		560 pF		10.0			
YP*AS681K090*		680 pF		10.0			
YP*AS102K110*		1000 pF		12.0			
YU*AS102M080*	Y5U	1000 pF	±20%	9.0	7.0	10.0	0.55+/-0.05
YU*AS152M090*		1500 pF		10.0			
YU*AS222M120*		2200 pF		13.0			
YU*AS332M120*		3300 pF		13.0			
YU*AS392M130*		3900 pF		14.0			
YU*AS472M140*		4700 pF		15.0			

AC Type-Class X1/Y2:

Part Number	Temp. Char.	Cap.(pF)	Tol.	Dimension (mm)			
				D max.	T max.	F±1	Wire Dia. (φd)
YP *AC101K060	Y5P	100	±10%	7.0	5.0	7.5, 10.0	0.55±0.05
YP *AC151K060		150		7.0			
YP *AC221K060		220		7.0			
YP *AC331K060		330		7.0			
YP *AC471K060		470		7.0			
YP *AC561K070		560		8.0			
YP *AC681K070		680		8.0			
YP *AC821K080		820		9.0			
YP *AC102K080		1000		9.0			
YU *AC102M060		Y5U		1000			
YU *AC152M080	1500		9.0				
YU *AC222M080	2200		9.0				
YU *AC332M100	3300		11.0				
YU *AC392M120	3900		13.0				
YU *AC472M120	4700		13.0				
YV *AC102M060	Y5V	1000	±20%	7.0	5.0	7.5 10.0	0.55±0.05
YV *AC152M060		1500		7.0			
YV *AC222M060		2200		7.0			
YV *AC332M080		3300		9.0			
YV *AC392M100		3900		11.0			
YV *AC472M100		4700		11.0			
YV *AC682M120		6800		13.0			
YV *AC103M140		10000		15.0			
SL *AC *** J060	SL	10,12,15,18,20,22,24,27, 30,33,36,39,47,50,51	±5%	7.0	5.0	7.5 10.0	0.55±0.05
SL *AC *** J070		56,62,68,75		8.0			
SL *AC820J080		82		9.0			
SL *AC101J090		100		10.0			

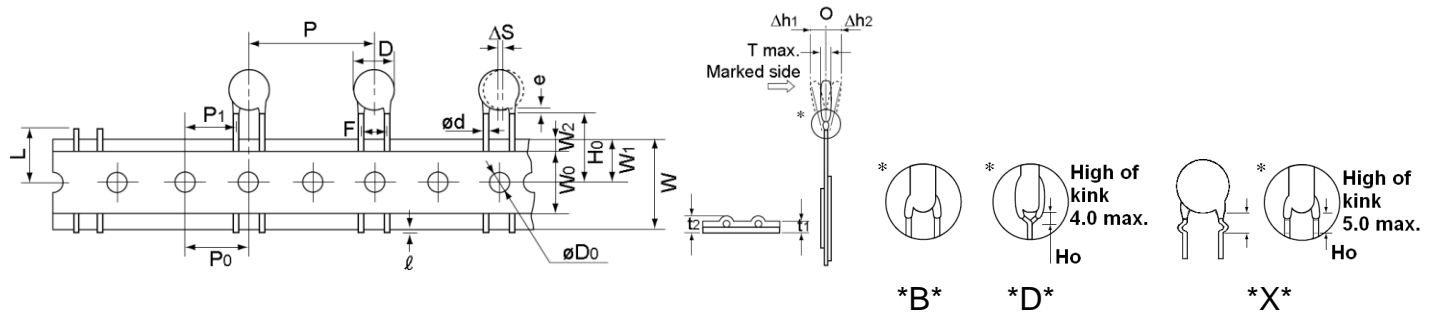
 = **Lead Code** : Please consult our part number explanation on page 20 for detail lead space, lead length, and lead configuration.

SAFETY STANDARD CERAMIC CAPACITOR

Taping Specification and Dimension

Taping Format: AH and AS X1/Y1

- 25.4mm pitch/lead spacing 10.0mm taping
Lead Code: *BAMD0 & *DAMD0 & *XAMD0



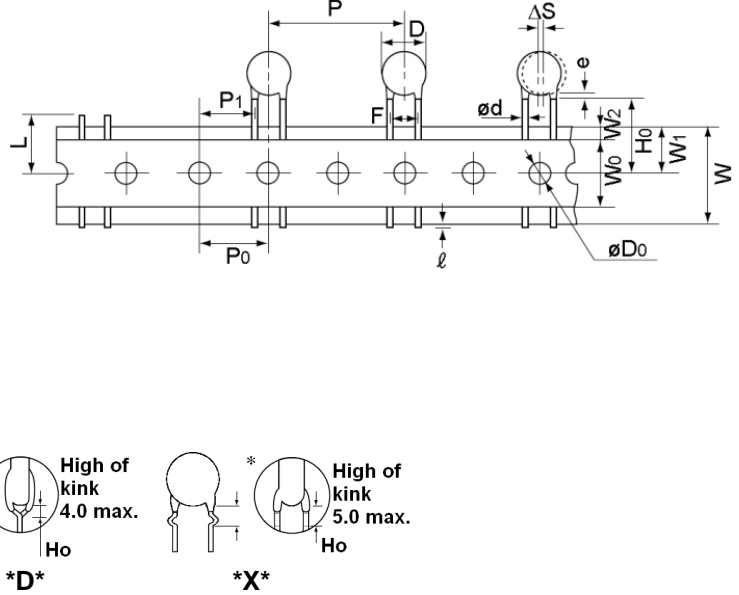
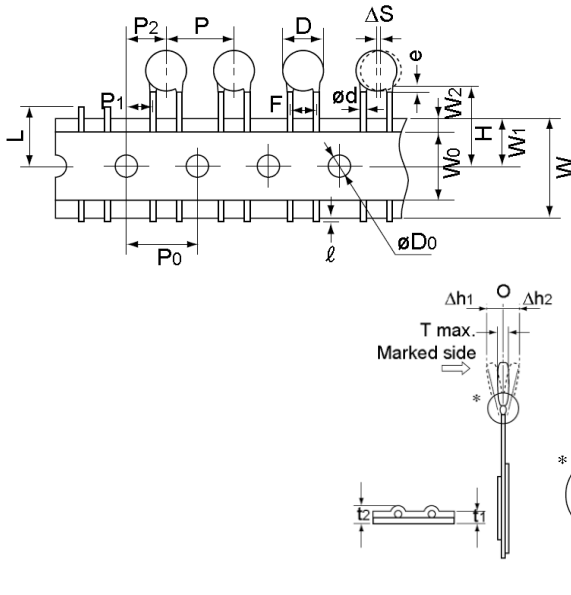
POE Part Number		*BAMD0 / *DAMD0 / *XAMD0
Item	Symbol	Dimensions(mm)
Pitch of component	P	25.4 ± 2
Pitch of sprocket	P0	12.7 ± 0.3
Lead spacing	F	10.0 ± 1.0
Length from hole center to component center	P2	12.7 ± 1.5
Length from hole center to lead	P1	7.7 ± 1.5
Body diameter	D	Refer to page 21
Deviation along tape, life or right	ΔS	0 ± 2.0
Carrier tape width	W	18.0 +1/-0.5
Position of sprocket hole	W1	9.0 ± 0.5
Lead distance between the kink and center of sprocket hole	H0	18.0 +2.0/-0 (For: *DAMD0 & *XAMD0)
Lead distance between the bottom of body and the center of sprocket hole	H	20.0+1.5/-1.0 (For: *BAMD0)
Protrusion length	ℓ	2.0max (Or the end of lead wire may be inside the tape.)
Diameter of sprocket hole	D0	4.0 ± 0.2
Lead diameter	φd	0.55±0.05
Total tape thickness	t1	0.6 ± 0.3
Total thickness, tape and lead wire	t2	1.5 max.
Deviation across tape	Δh1	2.0 max.
	Δh2	2.0 max
Portion to cut in case of defect	L	11.0 max.
Hole-down tape width	W0	8.0 min
Hole-down tape distortion	W2	1.5 ± 1.5
Coating extension on leads	E	3.0 max for straight lead style; Not exceed the kink leads for kink lead.
Body thickness	T	Refer to page 20

Taping Format: AC X1/Y2

- 15mm pitch/lead spacing 7.5mm taping
Lead Code: *BAFD7 & *DAFD7 & *XAFD7

- 25.4mm pitch/lead spacing 7.5mm taping
Lead Code: *BAMD7 & *DAMD7 & *XAMD7

- 25.4mm pitch/lead spacing 10.0mm taping
Lead Code: *BAMD0 & *DAMD0 & *XAMD0



POE Part Number		*BAFD7	*DAFD7 *XAFD7	*BAMD7 *DAMD7 *XAMD7	*BAMD0 *DAMD0 *XAMD0
Item	Symbol	Dimensions (mm)			
Pitch of component	P	15.0	15.0	25.4	25.4
Pitch of sprocket	P0	15.0±0.3	15.0±0.3	12.7±0.3	12.7±0.3
Lead spacing	F	7.5±1.0	7.5±1.0	7.5±1.0	10.0±1.0
Length from hole center to component center	P2	7.5±1.5	7.5±1.5	12.7±1.5	12.7 ± 1.5
Length from hole center to lead	P1	3.75±1.0	3.75±1.0	8.95±1.0	7.7±1.5
Body diameter	D	Refer to page 22			
Deviation along tape, life or right	ΔS	0±2.0			
Carrier tape width	W	18.0 +1/-0.5			
Position of sprocket hole	W1	9.0±0.5			
Lead distance between the kink and center of sprocket hole	H0	---	18.0+2.0/-0	18.0+2.0/-0 (For: *DAMD7 / *XAMD7)	18.0+2.0/-0 (For: *DAMD0 / *XAMD0)
Lead distance between the bottom of body and the center of sprocket hole	H	20.0+1.5/-1.0	---	20.0+1.5/-1.0 (For: *BAMD7)	20.0+1.5/-1.0 (For: *BAMD0)
Protrusion length	ℓ	2.0max (Or the end of lead wire may be inside the tape.)			
Diameter of sprocket hole	D0	4.0±0.2			
Lead diameter	φd	0.55±0.05			
Total tape thickness	t1	0.6±0.3			
Total thickness, tape and lead wire	t2	1.5 max.			
Deviation across tape	Δh1/Δh2	2.0 max.			
Portion to cut in case of defect	L	11.0 max.			
Hole-down tape width	W0	8.0 min			
Hole-down tape distortion	W2	1.5±1.5			
Coating extension on leads	e	3.0 max for straight lead style; Not exceed the kink leads for kink lead.			
Body thickness	T	Refer to page 21			

SAFETY STANDARD CERAMIC CAPACITOR










Marking

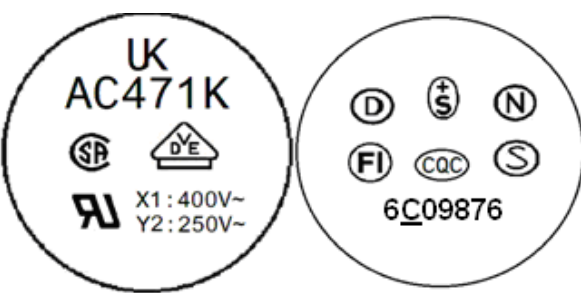

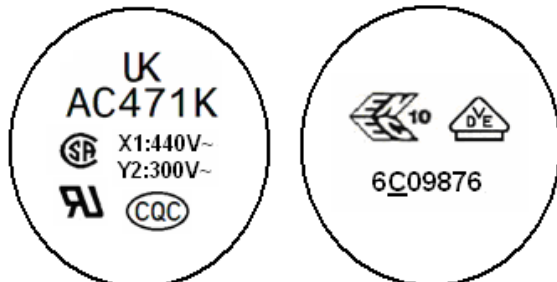

Marking: AH

1. Type Designation	AH		
2. Nominal Capacitance	3-digit-system		
3. Capacitance Tolerance	D:±0.5pF, J:±5%, K:±10%, M:±20%		
4. Company Trade mark	UK		
5. Products ID	<p>Abbreviation ex.:</p> <p>Manufacture year: ← 6 C 6 1234 → Last 4 digits of lot no.</p> <p>5:2015 6:2016 7:2017 ⋮</p> <p>Manufacture month: 1:January 2:February ⋮ 9:September O:October N:November D:December</p> <p>Epoxy resin code: " _ ": Haglogen and Pb free epoxy resin (For the last code "H" and "B" of SAP P/N)</p> <p>Manufactory: C:Pan overseas (Guangzhou)</p>		
6. Approved Monogram:			
(1) VDE approval mark		IEC 60384-14 Class Code : X1 : 400V~ , Y1 : 250V~ or 400V~	
(2) UL approval mark		(6) DEMKO approval mark	
(3) CSA approval mark		(7) FIMKO approval mark	
(4) SEMKO approval mark		(8) SEV approval mark	
(5) NEMKO approval mark		(9) CQC approval mark	
Two sides (For SAP part number 10-11 digits≤07 products)		One side (For SAP part number 10-11 digits≥08" products)	
Ex.:	Ex.:		Special marking: YP*AH102K100* 0AH:
<p>0AH:</p> <p>1AH:</p>	<p>0AH:</p> <p>1AH:</p>		<p>1AH:</p>
<p>* Marking by the laser.</p> <p>**"C": Marked with code " _ " stand for Halogen and Pb free for epoxy resin coating.</p>			

Marking: AC

1. Type Designation	AC
2. Nominal Capacitance	3-digit-system
3. Capacitance Tolerance	D:±0.5pF, J:±5%, K:±10%, M:±20%
4. Company Trade mark	UK
5. Products ID	<p>Abbreviation ex.:</p> <p>Manufacture year: ← 6 C 6 1234 → Last 4 digits of lot no.</p> <p>5:2015 6:2016 7:2017 ⋮</p> <p>Manufacture month: 1:January 2:February ⋮ 9:September O:October N:November D:December</p> <p>Epoxy resin code: " _ ": Halogen and Pb free epoxy resin (For the last code "H" and "B" of SAP P/N)</p> <p>Manufacture: C:Pan overseas (Guangzhou)</p>

6. Approved monogram:									
6.1 VDE		6.3 CSA		6.5 NEMKO		6.7 FIMKO		6.9 CQC	
6.2 UL		6.4 SEMKO		6.6 DEMKO		6.8 SEV			

Marking Ex.:	Type	Two sides marking (For SAP part number 10-11 digits≤07 products)		One side marking (For SAP part number 10-11 digits≥"08" products)
	0AC <u>X1:400Vac</u> <u>Y2:250Vac</u>			
	1AC <u>X1:440Vac</u> <u>Y2:300Vac</u>			

*Marking by the laser.

**"C" : Marked with code " _ " stand for Halogen and Pb free for epoxy resin coating.

SAFETY STANDARD CERAMIC CAPACITOR

Marking

Marking: AS

1. Type Designation	AS
2. Nominal Capacitance	3-digit-system
3. Capacitance Tolerance	K:±10%, M:±20%
4. Company Name Code(Trade mark)	UK
5. Products ID	<p>Abbreviation ex.:</p> <p>Manufacture year: ← 6 C 6 1234 → Last 4 digits of lot no.</p> <p>5:2015 6:2016 7:2017 ...</p> <p>Manufacture month: 1:January 2:February ... 9:September O:October N:November D:December</p> <p>Manufactory: C:Pan overseas (Guangzhou)</p> <p>Epoxy resin code: " _ ": Halogen and Pb free epoxy resin (For the last code "H" and "B" of SAP P/N)</p>
6. Approved Monogram:	
(1) VDE approval mark	<p>IEC 60384-14 Class code : X1 : 760V~ · Y1 : 500V~</p>
(2) UL approval mark	
Marking sample	
Two sides marking (for SAP part number 10-11 digits ≤“08”products)	One side marking (for SAP part number 10-11 digits ≥“09” products)
<p>* Marking by the laser.</p> <p>**“C” : Marked with code “ _ ” stand for Halogen and Pb free epoxy resin.</p>	

RADIAL LEADED MULTILAYER CERAMIC CAPACITOR PART NUMBER EXPLANATION

To order, please also specify Pan Overseas Part No. as the following example for SAP system :

RD21	B	102	K	500	B	5	C	07	B
①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩

① Product Type

Product Type		
RD21	RD20	RD30

② Dielectric Code

Code	T.C.	OP Temperature	Cap. Change (ΔC)
N	NPO	-55~+125°C	0 \pm 30 (ppm/°C)
B	X7R	-55~+125°C	\pm 15%
F	Y5V	-25~+85°C	+30% ~ -80%

③ Capacitance Code

Code	Capacitance	Code	Capacitance	Code	Capacitance	Code	Capacitance
010	1 pF	100	10 pF	102	1000 pF	103	10000 pF
1R5	1.5 pF	101	100 pF	472	4700 pF	104	100000 pF

④ Tolerance Code

Code	Tolerance	Code	Tolerance	Code	Tolerance	Code	Tolerance
J	\pm 5%	K	\pm 10%	M	\pm 20%	Z	+80% / -20%

⑤ Rated Voltage

Code	Voltage	Code	Voltage	Code	Voltage	Code	Voltage	Code	Voltage	Code	Voltage
100	10V	250	25V	101	100V	251	250V	631	630V	202	2000V
160	16V	500	50V	201	200V	501	500V	102	1000V		

⑥ Packaging Code

Code	Packing
A	Ammo
B	Bulk

⑦ Chip Size

Code	Chip Size
5	0805
6	1206

⑧ Termination

Code	Termination	Code	Termination	Code	Termination	Code	Termination
A	Ag/Ni/Sn Halogen free	L	Ag/Ni/Sn	H	Cu/Ni/Sn Halogen free	C	Cu/Ni/Sn

⑨-1 Lead Length for Bulk

Code	Length
07	7.0 mm
3E	3.5 mm
05	5.0 mm

⑨-2 Packing for Taping

Code	Packing
AN	Ammo

⑩ Length Tolerance

Code	Length Tol.	Code	Length Tol.
A	\pm 0.5 mm	D	Taping.
B	\pm 1.0 mm		

RADIAL LEADED MULTILAYER CERAMIC CAPACITOR

Features, Dimension and Taping Specification

Features

1. MLC Radial Lead Capacitor (RD) has wide application in computer, data processing, telecommunication, industrial control and instrumentation equipment.
2. The radial lead MLC is built with superior moisture, and shock resistant epoxy coating material, can be supplied in both, bulk or taping form for automatic insertion.
3. RoHS compliance.
4. Halogen free products are available.

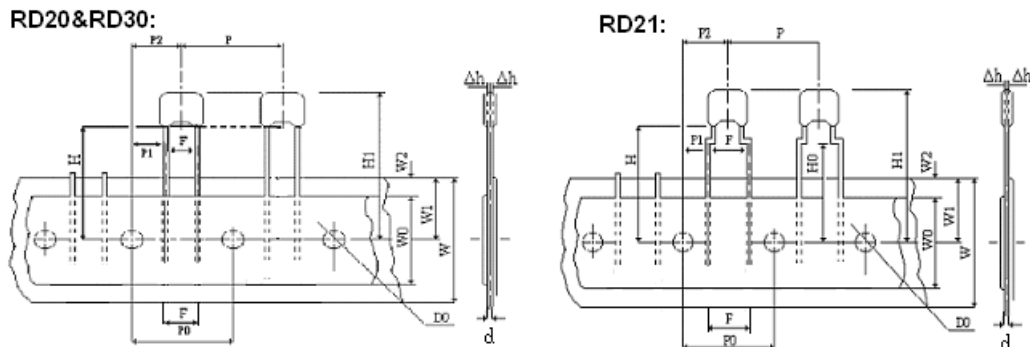
Lead configuration and dimension

(Unit: mm)

Size		Width (W) Max.	Height (H)Max.	Thickness (T) Max.	Length (L)	Lead spacing (F)		Lead diameter (d)
						Taping	Bulk	
RD20	0805	5.0	4.5	6.0	Refer to the item ①-1 SAP Part Number	2.5±1.0	2.54±1.0	0.5±0.05
RD21	0805	5.0	4.5	6.5		5.0±1.0	5.08±1.0	
	1206	6.5	5.0	7.0				
RD30	1210	6.5	5.5	7.5		5.0±1.0	5.08±1.0	
	1808	8.0	6.0	7.5				
	1812	8.0	6.5	8.0				

Lead Configuration	RD20	RD21	RD30

Taping Specification



ITEM	SYMBOL	DIMENSIONS (mm)	REMARKS
Pitch of Components	P	12.7 ± 1.0	
Feed hole pitch	P0	12.7 ± 0.3	Cumulative pitch error : ± 1.0mm / 20 pitches
Feed hole center to lead	P1	5.1 ± 0.7(for RD20) 3.85 ± 0.7(for RD21)	
Feed hole center to component center	P2	6.35 ± 1.3	
Lead diameter	φd	0.5 ± 0.05	
Lead to lead spacing	F	2.5 ± 0.8 (for RD20) 5.0 ± 0.8 (for RD21) 5.0 ± 0.8 (for RD30)	To lead top within tolerance
Component alignment, F - R	Δh	2.0 max	The alignment from the center of the lead is ± 1.0 mm
Tape width	W	18.0 -1.0 / -0.5	
Adhesive tape width	W0	11.0 min	
Hole position	W1	9.0 ± 0.5	
Adhesive tape position	W2	3.0 max	
Height of bottom body from tape center	H	18.0 + 2.0 / -0	H + 12.5 mm ≤ H1
Lead-wire clinch height	H0	18.0 ± 0.5 (for RD20/RD30) 16.0 ± 0.5 (for RD21)	6.5 ≤ H0 - W1
Component height	H1	32.25 max	
Feed hole diameter	D0	4.0 ± 0.2	
Total tape thickness	T	0.6 ± 0.3	

NPO Dielectric

Dielectric		NPO																								
		0805			1206							1210							1808				1812			
Size		50	100	200	50	100	200	250	500	630	1000	50	100	200	250	500	630	1000	500	630	1000	2000	500	630	1000	2000
Voltage (VDC)		50	100	200	50	100	200	250	500	630	1000	50	100	200	250	500	630	1000	500	630	1000	2000	500	630	1000	2000
Capacitance	1.0pF (010)	B	B	B																						
	1.2pF (1R2)	B	B	B	B	B																				
	1.5pF (1R5)	B	B	B	B	B	B	B	B	B	B															
	1.8pF (1R8)	B	B	B	B	B	B	B	B	B	B								B	B	B	B				
	2.2pF (2R2)	B	B	B	B	B	B	B	B	B	B								B	B	B	B				
	2.7pF (2R7)	B	B	B	B	B	B	B	B	B	B								B	B	B	B				
	3.3pF (3R3)	B	B	B	B	B	B	B	B	B	B								B	B	B	B				
	3.9pF (3R9)	B	B	B	B	B	B	B	B	B	B								B	B	B	B				
	4.7pF (4R7)	B	B	B	B	B	B	B	B	B	B								B	B	B	B				
	5.6pF (5R6)	B	B	B	B	B	B	B	B	B	B								B	B	B	B				
	6.8pF (6R8)	B	B	B	B	B	B	B	B	B	B								B	B	B	B				
	8.2pF (8R2)	B	B	B	B	B	B	B	B	B	B								B	B	B	B				
	10pF (100)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	12pF (120)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	15pF (150)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	18pF (180)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	22pF (220)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	27pF (270)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	33pF (330)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	39pF (390)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	47pF (470)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	56pF (560)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	68pF (680)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	82pF (820)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	100pF (101)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	120pF (121)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	150pF (151)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	180pF (181)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	220pF (221)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	270pF (271)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	330pF (331)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	390pF (391)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	470pF (471)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	560pF (561)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	680pF (681)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	820pF (821)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	1000pF (102)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	1200pF (122)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	1500pF (152)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	1800pF (182)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	2200pF (222)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	
	2700pF (272)	B	B		B	B	B	B					B	B	B	B	B	B					B	B		
3300pF (332)	B	B		B	B	B	B					B	B	B	B	B	B					B	B			
3900pF (392)	B	B		B	B	B	B					B	B	B	B	B	B									
4700pF (472)	B	B		B	B	B	B					B	B	B	B											
5600pF (562)	B	B		B	B							B	B	B	B											
6800pF (682)	B	B		B	B							B	B	B	B											
8200pF (822)	B			B	B							B	B	B	B											
0.010uF (103)	B			B	B							B	B	B	B											
0.012uF (123)	B			B	B							B	B													
0.015uF (153)				B	B							B	B													
0.018uF (183)	B			B	B																					
0.022uF (223)	B			B	B																					
0.027uF (273)				B																						
0.033uF (333)				B																						
0.039uF (393)				B																						
0.047uF (473)				B																						
0.056uF (563)				B																						
0.068uF (683)				B																						
0.082uF (823)				B																						
0.1uF (104)				B																						

- The letter in cell is expressed the symbol of product terminations. B: (Cu/Ni/Sn)
- RD30 type can use Mlcc size 1808 and 1812, RD21 type can use Mlcc size 0805 and 1206, but RD20 type can only use Mlcc size 0805.

RADIAL LEADED MULTILAYER CERAMIC CAPACITOR

Capacitance Range

X7R Dielectric

Dielectric		X7R																											
		0805			1206							1210							1808					1812					
Size		50	100	200	50	100	200	250	500	630	1000	50	100	200	250	500	630	1000	500	630	1000	2000	3000	500	630	1000	2000	3000	
Voltage (VDC)		50	100	200	50	100	200	250	500	630	1000	50	100	200	250	500	630	1000	500	630	1000	2000	3000	500	630	1000	2000	3000	
Capacitance	100pF (101)	B	B	B																									
	120pF (121)	B	B	B																									
	150pF (151)	B	B	B	B	B	B	B	B	B	B								B	B	B	B	B						
	180pF (181)	B	B	B	B	B	B	B	B	B	B								B	B	B	B	B						
	220pF (221)	B	B	B	B	B	B	B	B	B	B								B	B	B	B	B						
	270pF (271)	B	B	B	B	B	B	B	B	B	B								B	B	B	B	B				B	B	
	330pF (331)	B	B	B	B	B	B	B	B	B	B								B	B	B	B	B				B	B	
	390pF (391)	B	B	B	B	B	B	B	B	B	B								B	B	B	B	B				B	B	
	470pF (471)	B	B	B	B	B	B	B	B	B	B								B	B	B	B	B				B	B	
	560pF (561)	B	B	B	B	B	B	B	B	B	B								B	B	B	B	B				B	B	
	680pF (681)	B	B	B	B	B	B	B	B	B	B								B	B	B	B	B				B	B	B
	820pF (821)	B	B	B	B	B	B	B	B	B	B								B	B	B	B	B				B	B	B
	1000pF (102)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	1200pF (122)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	1500pF (152)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	1800pF (182)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	2200pF (222)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	2700pF (272)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	3300pF (332)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	3900pF (392)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	4700pF (472)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	5600pF (562)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	6800pF (682)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	8200pF (822)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.01uF (103)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.012uF (123)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.015uF (153)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.018uF (183)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.022uF (223)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.027uF (273)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.033uF (333)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.039uF (393)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.047uF (473)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.056uF (563)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.068uF (683)	B	B	B	B	B	B	B					B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.082uF (823)	B	B	B	B	B	B	B					B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.1uF (104)	B	B	B	B	B	B	B					B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.12uF (124)	B			B	B							B	B	B	B											B	B	
	0.15uF (154)	B			B	B							B	B	B	B											B	B	
	0.18uF (184)	B			B	B							B	B	B	B											B	B	
0.22uF (224)	B	B		B	B							B	B	B	B											B	B		
0.27uF (274)	B			B	B							B	B	B	B														
0.33uF (334)	B			B	B							B	B	B	B														
0.39uF (394)	B			B	B							B	B	B	B														
0.47uF (474)	B	B		B	B							B	B	B	B														
0.56uF (564)				B	B							B	B																
0.68uF (684)				B	B							B	B																
0.82uF (824)				B	B							B	B																
1.0uF (105)	B			B	B							B	B																
1.5uF (155)												B	B																
2.2uF (225)	B			B	B							B	B																
4.7uF (475)				B								B																	

- The letter in cell is expressed the symbol of product terminations. B: (Cu/Ni/Sn)
- RD30 type can use Mlcc size 1808 and 1812, RD21 type can use Mlcc size 0805 and 1206, but RD20 type can only use Mlcc size 0805.

Y5V Dielectric

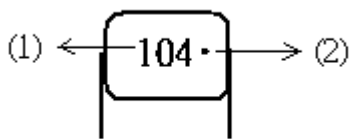
Dielectric		Y5V																							
Size		0805						1206						1210						1812					
Voltage (VDC)		10	16	25	50	100	200	10	16	25	50	100	200	250	10	16	25	50	100	200	250	50	100	200	250
Capacitance	0.01uF (103)	B	B	B	B	B	B	B	B	B	B	B	B	B					B	B	B		B	B	B
	0.015uF (153)	B	B	B	B	B	B	B	B	B	B	B	B	B					B	B	B		B	B	B
	0.022uF (223)	B	B	B	B	B	B	B	B	B	B	B	B	B					B	B	B		B	B	B
	0.033uF (333)	B	B	B	B	B	B	B	B	B	B	B	B	B					B	B	B		B	B	B
	0.047uF (473)	B	B	B	B	B	B	B	B	B	B	B	B	B					B	B	B		B	B	B
	0.068uF (683)	B	B	B	B	B	B	B	B	B	B	B	B	B					B	B	B		B	B	B
	0.1uF (104)	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.15uF (154)	B	B	B	B			B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
	0.22uF (224)	B	B	B	B			B	B	B	B	B			B	B	B	B	B			B	B	B	B
	0.33uF (334)	B	B	B	B			B	B	B	B				B	B	B	B	B			B	B	B	B
	0.47uF (474)	B	B	B	B			B	B	B	B				B	B	B	B				B	B	B	B
	0.68uF (684)	B	B	B	B			B	B	B	B				B	B	B	B				B	B	B	B
	1.0uF (105)	B	B	B	B			B	B	B	B				B	B	B	B				B	B		
	1.5uF (155)	B	B					B	B	B					B	B	B					B			
	2.2uF (225)	B	B	B				B	B	B	B				B	B	B	B				B			
	3.3uF (335)	B	B					B	B	B					B	B	B					B			
	4.7uF (475)	B	B	B				B	B	B					B	B	B	B				B			
6.8uF (685)	B						B	B						B	B	B	B				B				
10uF (106)	B	B					B	B	B					B	B	B	B				B				
22uF (226)	B						B																		

☆ The letter in cell is expressed the symbol of product terminations. B: (Cu/Ni/Sn)

☆ RD30 type can use Mlcc size 1808 and 1812, RD21 type can use Mlcc size 0805 and 1206, but RD20 type can only use Mlcc size 0805.

Marking

Rated voltage (VDC)	10	16	25	50	100	200	250	500	630	1000	2000	3000
Marking	<u>104</u>	<u>104</u>	<u>104</u>	104	<u>104</u>	<u>104</u>	104	<u>104</u>	<u>104</u>	<u>104</u>	<u>104</u>	<u>A</u> 104



- Rated capacitance: Identified by 3-figure code.
- Halogen and Pb free: There is a "." beside the capacitance code when the coating resin is Halogen and Pb free Epoxy.

MPQ (Min. Packing Quantity)

MPQ (Min. Packing Quantity)

Y Cap. (AH and AC series)	Packing type	The code of 14th to 15th in SAP P/N		MPQ (Kpcs/Box)		Remark
	Taping	AF		1		
		AT		0.5		
		AM		1		For size code ≤ 11
		AM		0.5		For size code ≥ 12
		AN		1		
	Packing type	Lead length	Size code of 10th to 11th in SAP P/N	MPQ (Kpcs/Bag)	Kpcs/Box	Remark
	Bulk	Long lead (L \geq 20mm)	06~12	0.5	1.5	
			13-15	0.5	1	
		Short lead (L<20mm)	06~14	0.5	2	
15			0.2	1		
	All	16	0.2	1		

Disc DC Cap. (50V~6KVdc)	Packing type	The code of 14th to 15th in SAP P/N		MPQ (Kpcs/Box)		Remark
	Taping	AF		1		
		AT		0.5		
		AM		0.5		
		TN		2		
		AN		2		Phenolic resin
		AN		1.5		Epoxy resin
	Packing type	Lead length	Size code of 10th to 12th in SAP P/N	MPQ (Kpcs/Bag)	Kpcs/Box	Remark
	Bulk	Long lead (L \geq 20mm)	040~070	1	3	Phenolic resin
			080~100	1	2	Phenolic resin
			050~100	1	2	Epoxy resin
			110~120	0.5	1.5	
			130~170	0.5	1	
Short lead (L<20mm)		040~060	1	6		
		070~080	1	4		
		090~100	1	3		
		110~140	1	2		
		150~170	0.5	1		

RD Cap. (Multilayer Radial Leded Type)	Packing type	The code of 16th to 17th in SAP P/N		MPQ (Kpcs/Box)		Remark
	Taping	TN		2		
		AN		2		Size of chip ≤ 0805
		AN		1.5		Size of chip > 0805
	Packing type	Lead length		MPQ (Kpcs/Bag)	Kpcs/Box	Remark
Bulk	Short lead(L<20mm)		1	20		

Ruled lines for writing content.

Taiwan - Yang-Mei Plant / Sales Office

Walsin Technology Corporation
566-1, Kao-Shi Road, Yang-Mei,
Tao-Yuan, Taiwan
Tel: +886-3-475-8711
Fax: +886-3-475-7130
Email: info@passivecomponent.com

China - Dalang Plant / Sales Office

Dongguan Walsin Tech. Electronics CO., Ltd.
Xiniupo Administrative Zone,
Dalang Town, Dongguan City,
Guangdong Province 523799
Tel: +86-769-831-15168
Fax: +86-769-831-15188
Email: msyu@passivecomponent.com

China - Suzhou Plant / Sales Office

Suzhou Walsin Technology Electronics Co., Ltd.
No. 369, Changyan Street,
Suzhou Industrial Park,
Jiangsu Province 215126
Tel: +86-512-628-36888
Fax: +86-512-628-37888
Email: msyu@passivecomponent.com

China - Guangzhou Plant / Sales Office

Pan Overseas (Guangzhou) Electronic Co., Ltd.
No. 277, Hong Ming Road, Eastern Section,
Guangzhou Economic and Technology
Development Zone, China
Tel: +86-20-8223-7476
Fax: +86-20-8223-7475
Email: msyu@passivecomponent.com

Germany - Munich Sales Office

Walsin Technology Corporation Europe
Stefan-George-Ring 29,
81929 Munich, Germany
Tel: +49-(0)89-9308-6475
Fax: +49-(0)89-9308-6464
Email: aw@passivecomponent.com

Singapore - Sales Office

WTC Singapore Sales Office, Singapore
24 Sin Ming Lane Midview City
#04-100, Singapore 573970
Contact: Morris Liew
Tel: +65-6262 3997
Email: morrisliew@sg.passivecomponent.com

Malaysia - Sales Office

Walsin Technology Corporation, Malaysia
1st Floor, No.19, Jalan Puteri 5/8,
Bandar Puteri Puchong, Puchong,
47100, Selangor, Malaysia
Contact: Arthur Ling
Tel : +6016-2217-948
Fax : +603-8051-7060
Email : arthurling@passivecomponent.com

United States - West Coast Sales Office

Walsin Technology Corporation, USA
Contact: FC Tseng
Tel: +1-214-708-5182
E-mail: fctsen@passivecomponent.com

JAPAN - Sales Office

PSA BLDG. 3F, 6-1-6 Chuou,
Yamato-Shi, Kanagawa,
242-0021 Japan
Tel:+81-46-204-8829
Fax:+81-46-204-8955
Email: tsakano@kamaya.co.jp

PSA

Walsin Technology Corporation

TAIWAN - WTC Yang-Mei Plant / Sales Office

566-1, Kao-Shi Road, Yang-Mei, Tao-Yuan, Taiwan

Tel: +886-3-475-8711

Fax: +886-3-475-7130

Email: info@passivecomponent.com



July 2017