

SPECIFICATION

Current Rating: 3 AMP
 Insulation Resistance: 1000 MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C



MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy

ORDER INFORMATION

5 B H 1 S D A 8 8 - X X X X 5 X U - 0 0

No. of contacts (06~50)	G0:Gold Flash GA:5u" GB:10u" GC:20u" GD:30u" T0:Tin Plated TE:Tin 200u"	S0:Selective SA:5u" SB:10u" SC:20u" SD:30u"	5:W/O peg	T:Tube, W/O Cap C:Tube, With Cap H:Tape & Reel, W/O Cap R:Tape & Reel, With Cap A:Tray, W/O Cap P:Tray, With Cap	U:RoHS+Hi-Temp.
-------------------------	---	---	-----------	---	-----------------

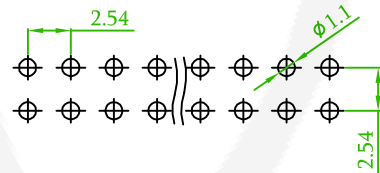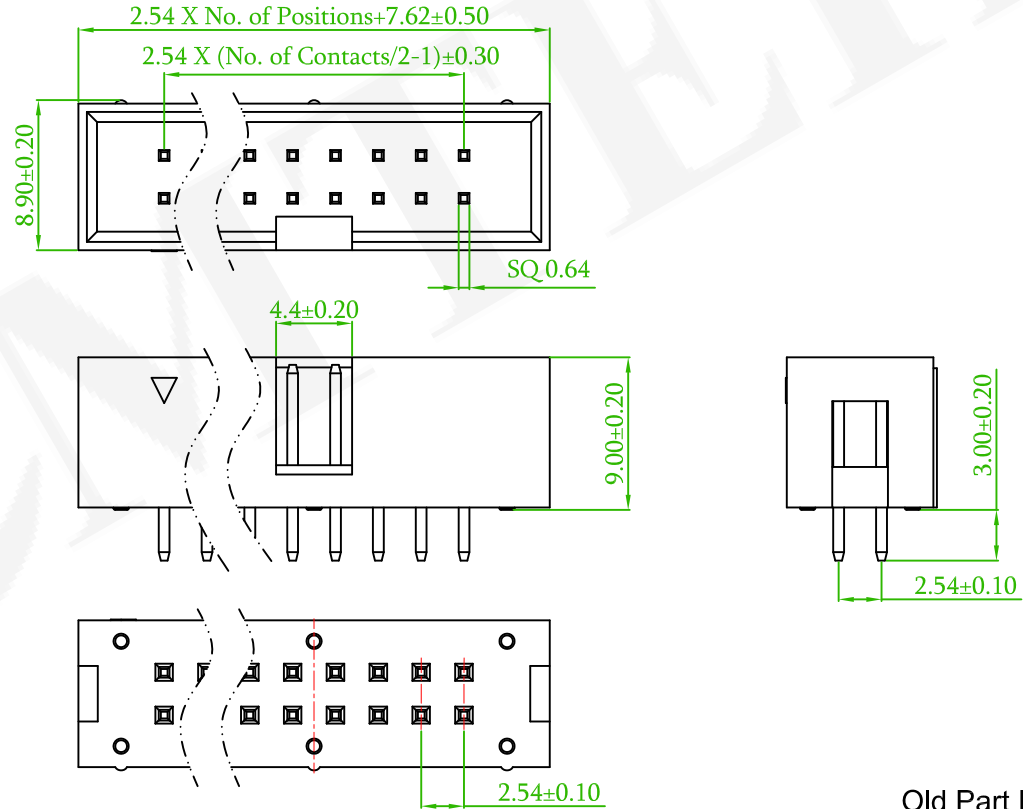

Old Part No.:BH1S-XX-U


Recommended PCB Layout
 (PCB TOLERANCE ± 0.1)

<p>Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	BOX HEADER 2.54mm			頁數 Page	1/1
	品號 PART NO.	5BH1SDA88-XXXX5XU-00			繪圖 DRAWN	Mia
	圖號 DRAWING NO.	版本 REV.	A	核對 CHECKED	Jonny	2016/09/20
	客戶品號 CUSTOMER P/N	比例 SCALE	None	承認 APPROVED	Aaron	2016/09/20
	公差 TOLERANCE	.X ± 0.35 .XX ± 0.25	.X° $\pm 3^\circ$	單位 UNIT	mm	THIRD ANGLE PROJECTION

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

5BH1SDA88-XXXX5XX-00

Box Header 2.54mm Straight Type

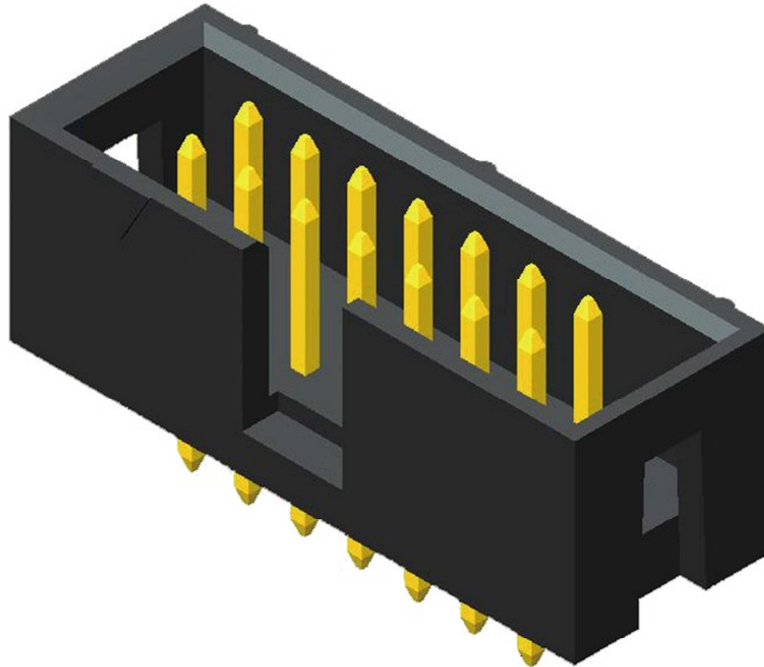

Specification:

Current Rating: 3 AMP

Insulation Resistance: 1000M Ω Min.

Contact Resistance: 20m Ω Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy