



MATERIAL 

Insulator: Nylon 9T, UL94V-0, Black
Contact Pin: Phosphor Bronze


ORDER INFORMATION

5 P S 1 B S A 3 5 - 1 X X X X N N X T U - 0 0

◎:Standard Recommend

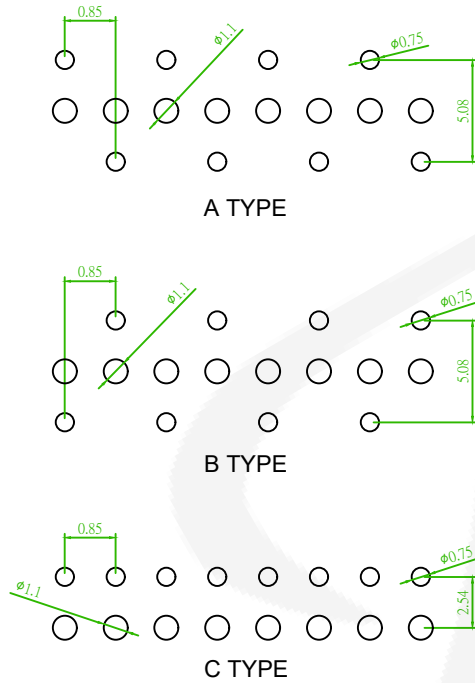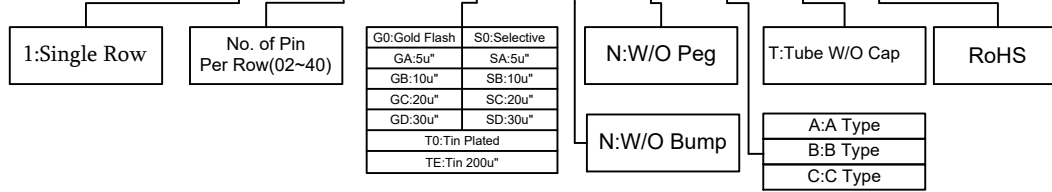


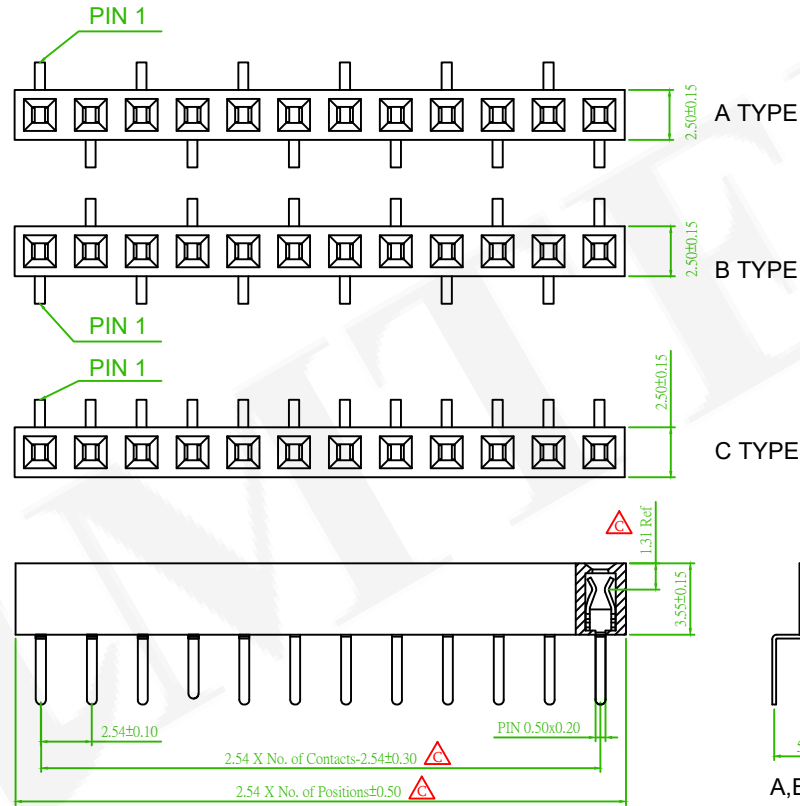


 Recommended PCB Layout
(PCB TOLERANCE ±0.05)



Old Part No. : PS1B35-1XX-U




品名 TITLE	FEMALE HEADER 2.54mm			頁數 Page	1/1
品號 PART NO.	5PS1BSA35-1XXXXNXTU-00		繪圖 DRAWN	Jeff 2016/09/19	
圖號 DRAWING NO.	GN003-EA596	版本 REV.	D	核對 CHECKED	Josh 2019/01/21
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/01/21
公差 TOLERANCE	.X ± 0.40	單位 UNIT	mm	THIRD ANGLE PROJECTION	
	.XX ± 0.25				

 x1	ECN NO.:220102 Revise the drawing	Alice	2022/03/29
 x4	ECN 201243.: Revise the drawing	David	2021/02/01
 x1	Add the Recommended Mating Part	Eric	2019/01/18
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

5PS1BSA35-1XXXXNNA/BTU-00

Female Header 2.54mm 1 Row H=3.55mm Bottom Entry A/B Type

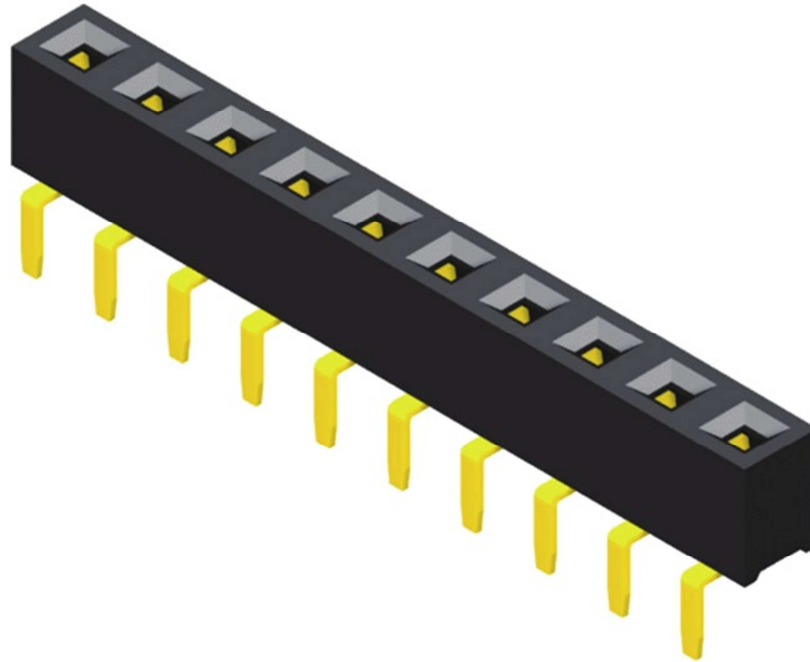

Specification:

Current Rating: 3 AMP

Insulation Resistance: 1000M Ω Min.

Contact Resistance: 20m Ω Max.

Dielectric Voltage: 500V AC for one minute

Operation Temperature: -40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL94V-0, Black

Contact Pin: Copper Alloy