

SPECIFICATION






Current Rating: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105 °C

MATERIAL

Insulator: Hi-Temp. Thermoplastic, UL94V-0, Black
 Contact Pin: Copper Alloy


ORDER INFORMATION

5 P S 3 S D A 4 4 - 2 X X X X N N N X U - 0 0

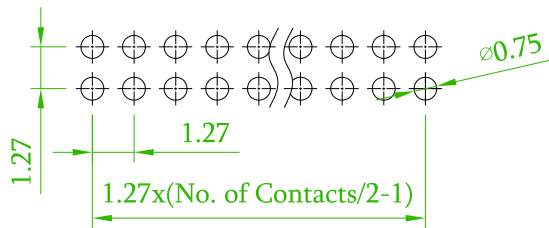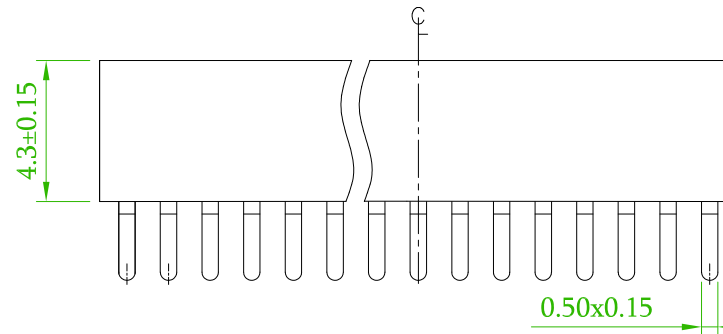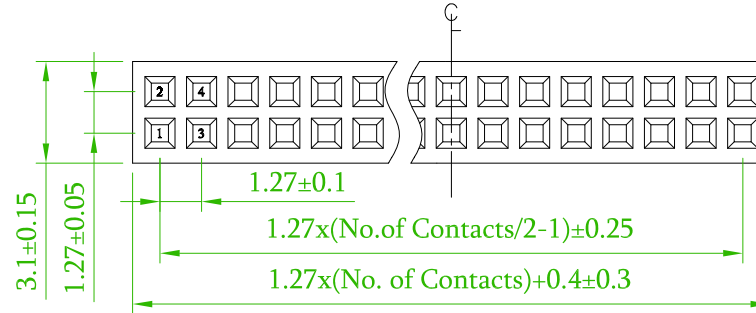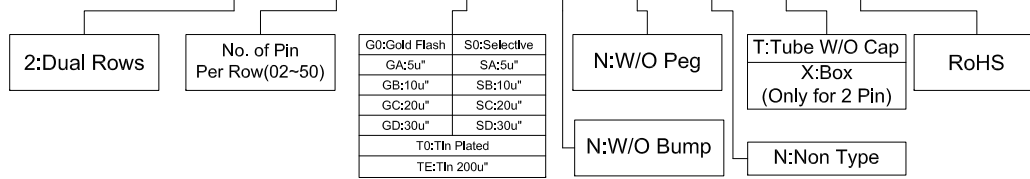

Recommended PCB Layout
 (PCB TOLERANCE ±0.1)

Old Part No. : PS3S44-2XX-U

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE	 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	1.27x1.27mm FEMALE HEADER D/R V/T DIP TYPE			頁數 Page	1/1			
					品號 PART NO.	5PS3SDA44-2XXXXNNNXU-00			繪圖 DRAWN	Gary	2018/12/24		
					圖號 DRAWING NO.	GN003-GB730			版本 REV.	A	核對 CHECKED	Josh	2018/12/24
					客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED	Jason	2018/12/24
					公差 TOLERANCE	.X ± 0.25 .XX ± 0.20			單位 UNIT	mm	THIRD ANGLE PROJECTION	