

# Ben-Har™ 1151-FR

## Flame Retardant, Flexible Silicone Rubber Coated Slewing

Temp Class: Class H (200° C)


Grades Available: 15,000 V, A (8,000 V), C (2,500 V)

Material: Silicone Coated Fiberglass

Sizes Available: AWG #24 through 2" I.D.

Colors Available: White, Black, Red Iron Oxide, Natural

Applicable Standards: UL Recognized Component and VW-1 Flame Rating under file no. E63446 (Grade A), NEMA TF-1 Type 5, MIL-I-3190/6 - QPL (Grade A)

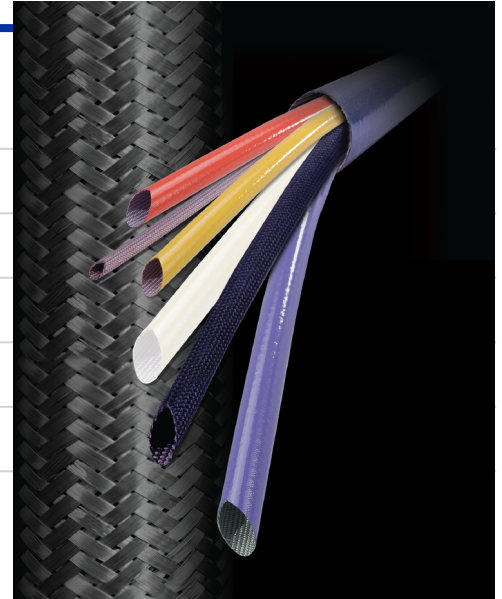

## Features

- ▶ Excellent low temperature flexibility with outstanding flame retardant properties.
- ▶ Resistant to acids, alkalis, organic solvents and aliphatic hydrocarbons. Slight swelling may be produced by aromatic solvents and chlorinated hydrocarbons.
- ▶ Compatible with common Class H insulating varnishes.
- ▶ Ketones and esters may cause deterioration.

## Product Description

Ben-Har 1151-FR sleeving is an extremely flexible silicone rubber coated fiberglass sleeving with outstanding flame retardant properties. The special combination of a smooth fiberglass bore and flexible, elastomeric silicone coating allows this sleeving to expand and conform over larger dimensions, assuring a snug fit, permanent placement, and elastic self-fitting on components or terminals. The excellent bond of rubber coating to the braid insures against damage from rough assembly handling.

## Suggested Applications

Ben-Har 1151-FR is commonly used in appliance assemblies, wire harnesses, transformer leads, power supplies, and motor coil and heater leads. This product is also available in heavy wall constructions (15KV) for high voltage use.



1-800-837-7477  
www.atkinsandpearce.com

# Ben-Har™ 1151-FR

## Sizes Available

Size	Inside Diameter, in. (mm)		Nominal I.D.
	Maximum	Minimum	
24 AWG	0.027 (0.69)	0.020 (0.51)	0.022
22 AWG	0.032 (0.81)	0.025 (0.64)	0.027
20 AWG	0.039 (0.99)	0.032 (0.81)	0.034
18 AWG	0.049 (1.25)	0.040 (1.02)	0.042
16 AWG	0.061 (1.55)	0.051 (1.30)	0.053
14 AWG	0.074 (1.88)	0.064 (1.63)	0.066
12 AWG	0.091 (2.31)	0.081 (2.06)	0.085
10 AWG	0.112 (2.80)	0.102 (2.60)	0.106
9 AWG	0.124 (3.20)	0.114 (2.90)	0.118
8 AWG	0.141 (3.60)	0.129 (3.30)	0.133
7 AWG	0.158 (4.00)	0.144 (3.70)	0.148
6 AWG	0.178 (4.50)	0.162 (4.10)	0.166
5 AWG	0.198 (5.00)	0.182 (4.60)	0.186
4 AWG	0.224 (5.70)	0.204 (5.20)	0.208
3 AWG	0.249 (6.30)	0.229 (5.80)	0.234
2 AWG	0.278 (7.10)	0.258 (6.60)	0.263
1 AWG	0.311 (7.90)	0.289 (7.30)	0.294
0 AWG	0.347 (8.80)	0.325 (8.30)	0.330
3/8"	0.399 (10.10)	0.375 (9.50)	0.375
7/16"	0.462 (11.70)	0.438 (11.10)	0.438
1/2"	0.524 (13.30)	0.500 (12.70)	0.500
5/8"	0.655 (16.70)	0.625 (15.90)	0.625
3/4"	0.786 (20.00)	0.750 (19.10)	0.750
7/8"	0.911 (23.20)	0.875 (22.20)	0.875
1"	1.036 (26.30)	1.000 (25.40)	1.000
1-1/4"	1.286 (32.80)	1.250 (31.90)	1.250
1-1/2"	1.536 (39.20)	1.500 (38.30)	1.500
2"	2.036 (51.90)	2.000 (51.00)	2.000

\*All Atkins & Pearce coated insulation solutions are REACH and RoHS compliant.



1-800-837-7477  
www.atkinsandpearce.com

# Ben-Har™ 1151-FR

## Ordering Information

Product	Grade	Size	Color	Packing Code
320 = 1151 FR	01 = A	924 = AWG #24	02 = White	S = Spool
	03 = C	922 = AWG #22	03 = Black	Y = Cut Pieces
		920 = AWG #20	14 = RIO	
		918 = AWG #18		
		916 = AWG #16		
		914 = AWG #14		
		912 = AWG #12		
		909 = AWG #9		
		908 = AWG #8		
		907 = AWG #7		
		906 = AWG #6		
		905 = AWG #5		
		904 = AWG #4		
		903 = AWG #3		
		902 = AWG #2		
		901 = AWG #1		
		900 = AWG #0		
		010 = 3/8"		
		011 = 7/16"		
		013 = 1/2"		
		016 = 5/8"		
		019 = 3/4"		
		022 = 7/8"		
		025 = 1"		
		1032 = 1-1/4"		
		1038 = 1-1/2"		
		1051 = 2"		

\*Example: 3200190102S (1151 FR Grade A, 1, White, Spool)