


●特点 Features:

- 1、耐热性好、温度系数小、噪声低、负荷功率大、绝缘性高。Good heat-durability, low temperature coefficient, low noise, high load power, high insulating capacity.
- 2、使用环境温度 Operating ambient temperature: -55℃~+275℃。
- 3、阻值误差 Resistance tolerance: ±1%、±2%、±5%、±10%。

●标识含义 Mark Meaning:

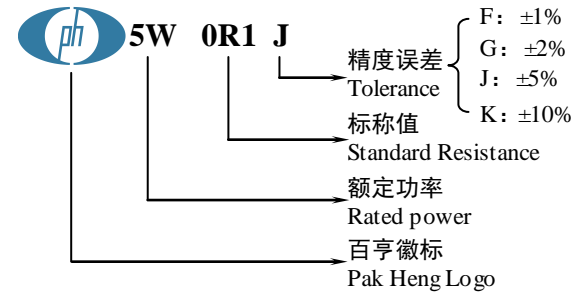


●产品结构图 Structural Drawing:

<p>SQP:</p>	<p>A、填充料 Padding materials B、镀锡铜线 Tinned copper lead wire C、瓷壳 Ceramic shell D、玻璃纤维或陶瓷基体或电阻膜层 Fiberglass or ceramic core or resistors film E、电阻丝或陶瓷基体 Resistance wire or ceramic core F、铁帽 Iron cap</p>
<p>SQZ:</p>	<p>A、端子 Terminal B、填充料 Padding materials C、瓷壳 Ceramic shell D、电阻丝或陶瓷基体 Resistance wire or ceramic core E、玻璃纤维或陶瓷基体或电阻膜层 Fiberglass or ceramic core or resistors film</p>
<p>SQM:</p>	<p>A、填充料 Padding materials B、瓷壳 Ceramic shell C、电阻丝或陶瓷基体 Resistance wire or ceramic core D、玻璃纤维或陶瓷基体或电阻膜层 Fiberglass or ceramic core or resistors film E、铁帽 Iron cap F、镀锡铜线 Tinned copper lead wire</p>


●规格尺寸及阻值范围 Dimensions and Resistance Range:

●SQP:

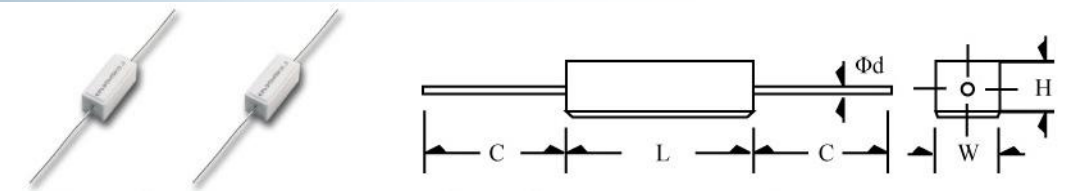


料号 Part No.	功率 Power	尺寸 Dimensions(mm)					阻值范围 Resistance range			
		L±.5	W±	H±	C±3	d±0.05	RXR	BRX	HRX	NRX
RXR01B(HRX/NRX)	1W	14.0	6.5	5.5	23.0	0.62	0.1R~100R		100R~100K	0R2~2R7
RXR02B(HRX/NRX)	2W	18.0	7.0	7.5	21.0	0.75	0.1R~820R		220R~100K	0R1~10R
RXR03B(BRX/HRX/NRX)	3W	22.0	8.0	8.0	35.0	0.75	0.1R~3K3	1R~120R	100R~100K	0R1~27R
RXR04B(BRX/HRX/NRX)	4W	22.0	8.0	8.0	35.0	0.75	0.1R~3K3	1R~120R	100R~100K	0R1~27R
RXR05B(BRX/HRX/NRX)	5W	22.0	10.0	9.0	35.0	0.75	0.1R~3K3	1R~120R	100R~100K	0R1~27R
RXR06B(BRX/HRX/NRX)	6W	35.0	10.0	9.0	35.0	0.75	0.1R~7K5	1R~390R	820R~100K	0R2~39R
RXR07B(BRX/HRX/NRX)	7W	35.0	10.0	9.0	35.0	0.75	0.1R~7K5	1R~390R	820R~100K	0R2~39R
RXR08B(BRX/HRX/NRX)	8W	35.0	10.0	9.0	35.0	0.75	0.1R~7K5	1R~390R	820R~100K	0R2~39R
RXR09B(BRX/HRX/NRX)	9W	48.0	10.0	9.0	33.0	0.75	0.1R~12K	1R~470R	1K~100K	0R2~47R
RXR10B(BRX/HRX/NRX)	10W	48.0	10.0	9.0	33.0	0.75	0.1R~12K	1R~470R	1K~100K	0R2~47R
RXR11B(BRX/HRX/NRX)	11W	48.0	10.0	9.0	33.0	0.75	0.1R~12K	1R~470R	1K~100K	0R2~47R
RXR15B(BRX/NRX)	15W	48.0	12.5	11.5	33.0	0.75	0.2R~18K	1R~560R		0R2~56R
RXR17B(BRX/NRX)	17W	60.0	14.0	13.5	33.0	0.75	0.2R~30K	1R~620R		0R2~68R
RXR20B/25B(BRX/NRX)	20W~25W	60.0	14.0	13.5	33.0	0.75	0.2R~30K	1R~620R		0R2~68R
RXR30B/40B(HRX)	30W~40W	89.0	19.0	19.0	23.0	0.75	0.2R~30K		1K~100K	

●BH:

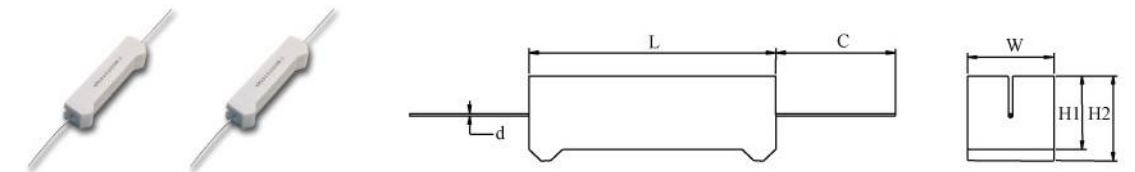

料号 Part No.	功率 Power	尺寸 Dimensions(mm)						阻值范围 Resistance range			
		L±.5	W±	H1±	H2±	C±3	d±0.05	RXR	BRX	HRX	NRX
RXR05B(BRX/HRX/NRX)	5W	22.0	10.0	9.5	10.5	35.0	0.75	0R1~3K3	1R~120R	100R~100K	0R1~27R
RXR06B(BRX/HRX/NRX)	6W	35.0	10.0	10.0	11.5	35.0	0.75	0R1~7K5	1R~390R	820R~100K	0R2~39R
RXR07B(BRX/HRX/NRX)	7W	35.0	10.0	10.0	11.5	35.0	0.75	0R1~7K5	1R~390R	820R~100K	0R2~39R
RXR08B(BRX/HRX/NRX)	8W	35.0	10.0	10.0	11.5	35.0	0.75	0R1~7K5	1R~390R	820R~100K	0R2~39R
RXR09B(BRX/HRX/NRX)	9W	48.0	10.5	10.0	12.5	33.0	0.75	0R1~12K	1R~470R	1K~100K	0R2~47R
RXR10B(BRX/HRX/NRX)	10W	48.0	10.0	10.0	12.5	33.0	0.75	0R1~12K	1R~470R	1K~100K	0R2~47R
RXR11B(BRX/HRX/NRX)	11W	48.0	10.0	10.0	12.5	33.0	0.75	0R1~12K	1R~470R	1K~100K	0R2~47R
RXR15B(BRX/NRX)	15W	48.0	12.5	13.5	17.0	33.0	0.75	0R2~18K	1R~560R		0R2~56R
RXR17B(BRX/NRX)	17W	59.0	14.0	13.5	17.0	33.0	0.75	0R2~30K	1R~620R		0R2~68R
RXR20B(BRX/NRX)	20W	59.0	14.0	13.5	17.0	33.0	0.75	0R2~30K	1R~620R		0R2~68R
RXR25B(BRX/NRX)	25W	59.0	14.0	13.5	17.0	33.0	0.75	0R2~30K	1R~620R		0R2~68R

●SQZ:

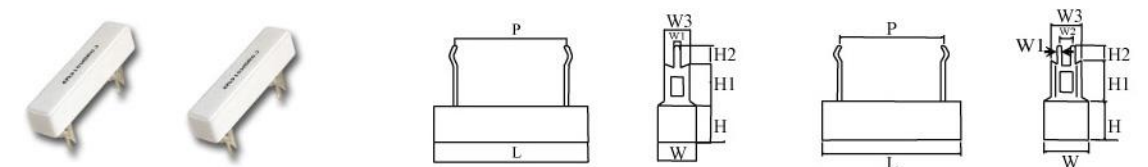

料号 Part No.	功率 Power	尺寸 Dimensions(mm)									阻值范围 Resistance range				
		L±.5	W±	H±	P±.5	H1±	H2±.5	W1±.5	W2±.5	W3±.5	RXR	BRX	HRX	NRX	
BXR03B(NRX)	3W	24.0	9.0	9.0	100	105	4.5	1.5	5.0	7.0		1R~120R			0R1~27R
BXR04B(NRX)	4W	24.0	9.0	9.0	100	105	4.5	1.5	5.0	7.0		1R~120R			0R1~27R
RXR05B(BRX/HRX/NRX)	5W	28.0	10.0	10.0	150	105	4.5	1.5	5.0	7.0		0R1~6K2	1R~330R	560R~100K	0R1~33R
RXR06B(BRX/HRX/NRX)	6W	28.0	10.0	10.0	150	105	4.5	1.5	5.0	7.0		0R1~6K2	1R~330R	560R~100K	0R1~33R
RXR07B(BRX/HRX/NRX)	7W	36.0	10.0	10.0	200	105	4.5	1.5	5.0	7.0		0R1~7K5	1R~390R	820R~100K	0R2~39R
RXR08B(BRX/HRX/NRX)	8W	36.0	10.0	10.0	200	105	4.5	1.5	5.0	7.0		0R1~7K5	1R~330R	820R~100K	0R2~39R
RXR09B(BRX/HRX/NRX)	9W	48.0	10.0	10.0	300	105	4.5	1.5	5.0	7.0		0R1~12K	1R~470R	1K~100K	0R2~47R
RXR10B(BRX/HRX/NRX)	10W	48.0	10.0	10.0	300	105	4.5	1.5	5.0	7.0		0R1~12K	1R~470R	1K~100K	0R2~47R
RXR11B(BRX/HRX/NRX)	11W	48.0	10.0	10.0	300	105	4.5	1.5	5.0	7.0		0R1~12K	1R~470R	1K~100K	0R2~47R
RXR15B(BRX/NRX)	15W	48.0	12.5	12.0	300	300	4.5	3.0	8.0	10.0		0R1~18K	1R~560R		0R2~56R
RXR20B(BRX/NRX)	20W	60.0	15.0	13.0	420	300	4.5	3.0	8.0	10.0		0R1~20K	1R~620R		0R2~68R
RXR25B(BRX/NRX)	25W	60.0	15.0	13.0	420	300	4.5	3.0	8.0	10.0		0R1~20K	1R~620R		0R2~68R

水泥类 CEMENT RESISTORS

水泥类 CEMENT RESISTORS