


Mechanical Specifications

D	6.0 mm ± 0.5 mm
T	5.0 mm ± 0.2 mm
Lead Diameter	0.5 mm ± 0.1 mm
S	6.25 mm ± 0.30 mm
L	38.0 mm ± 1.50 mm
B	5.00 mm ± 0.2 mm
C	3.60 mm ± 0.40 mm
Straight Lead	Standard

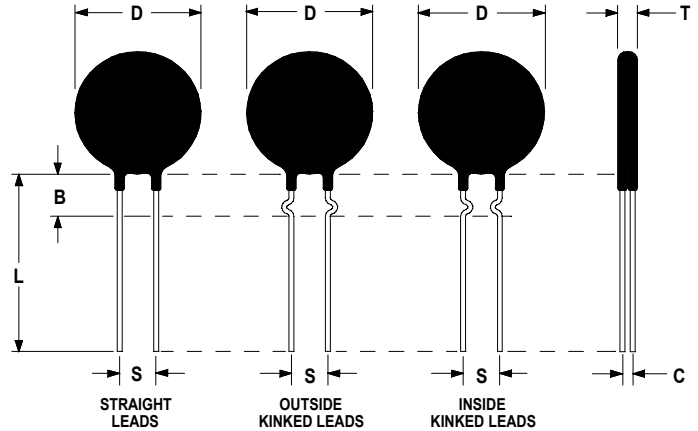

Electrical Specifications

R@25°C	100 Ω ±30%
Minimum Switching Current up @ 65°C	0.08 Amp
Max Continuous Current @ 65°C	0.05 Amp
Reference Curie Temperature	120 °C
Maximum Voltage Rating	265 Vrms
Heat Capacity	0.49 Joules/°C
Dissipation Constant	8.0 Mw/°C
Thermal Time Constant	20 sec.
Body Temperature @ Max Voltage	112 °C

Ametherm, Inc

3111 N. Deer Run Road Bldg. 4
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775-884-0670
www.Ametherm.com