


Mechanical Specifications

D	8.0 mm ± 0.5 mm
T	5.0 mm ± 0.2 mm
Lead Diameter	0.6 mm ± 0.1 mm
S	6.25 mm ± 0.30 mm
L	38.0 mm ± 1.50 mm
B	5.00 mm ± 0.2 mm
C	3.60 mm ± 0.40mm
Straight Lead	Standard

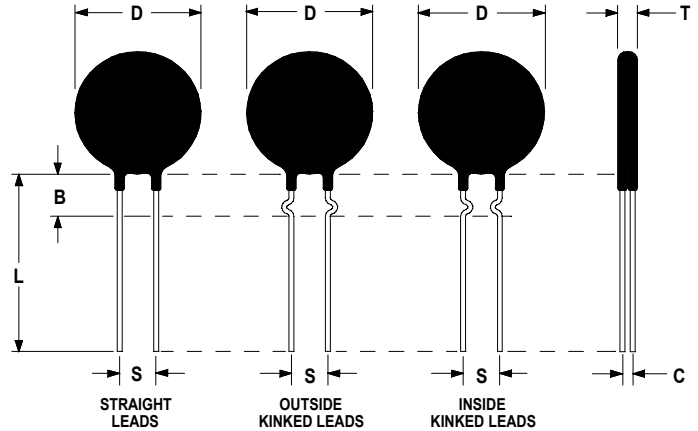

Electrical Specifications

R@25°C	100 Ω ±30%
Minimum Switching Current up @ 25°C	0.10 Amp
Max Continuous Current @ 55°C	0.06 Amp
Reference Curie Temperature	120 °C
Maximum Voltage Rating	400 Vrms
Heat Capacity	0.49 Joules/°C
Dissipation Constant	8.0 Mw/°C
Thermal Time Constant	30 sec.
Body Temperature @ Max Voltage	112 °C

**Ametherm, Inc**  
3111 N. Deer Run Road Bldg. 4  
Carson City, NV 89701  
Telephone: **800-808-2434**  
Fax: 775-884-0670  
[www.Ametherm.com](http://www.Ametherm.com)