




Reliability Delivered On Time

P/N:CL10 1R7120

Mechanical Specifications

D	10.0±0.2 mm
T	4.0 ±0.5mm
Lead Diameter	0.635 mm
S	5.0 mm Nom
L	38.0 mm Nom
B for inside crimped lead.	4.0 ± 0.5 mm
Straight Lead	
Lead Material	Tinned Copper
Coating Material	Silicone Resin

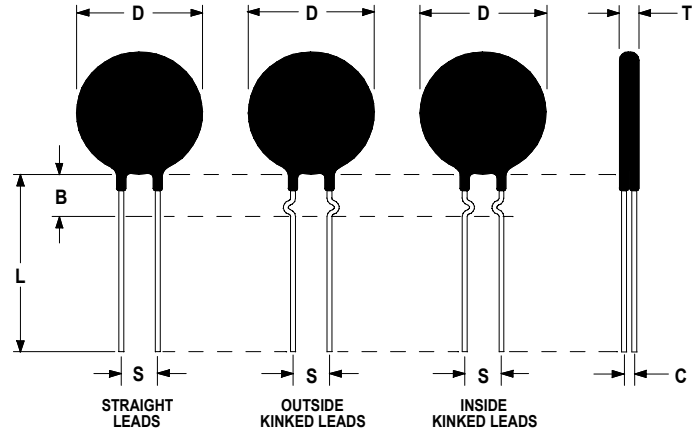

Electrical Specifications

Resistance @ 25°C	1.7 Ω ± 30%
Max Inrush current	8.0 A
Continuous current @ 25°C	0.70 A
Switching current @ 25°C	1.050 A
Residual Current at Maximum Voltage	0.090 A
Voltage rating	30.0Vrms
Dissipation constant	10.0mw/c
Thermal time constant	20 sec
Transition Temperature	128°C
Operating Temperature	-10°C/+120°C

**Ametherm, Inc**

3111 N. Deer Run Road Bldg. 4  
Carson City, NV 89701

Telephone: **800-808-2434**

Fax: 775-884-0670

**[www.Ametherm.com](http://www.Ametherm.com)**

Reliability Delivered On Time