


Mechanical Specifications

D	10.0 mm ± 0.5 mm
T	5.0 mm ± 0.2 mm
Lead Diameter	0.6 mm ± 0.1 mm
S	6.25 mm ± .30 mm
L	38.0 mm ± 1.50 mm
B	5.00 mm ± 0.2 mm
C	3.60 mm ± 0.40mm
Straight Lead	Standard

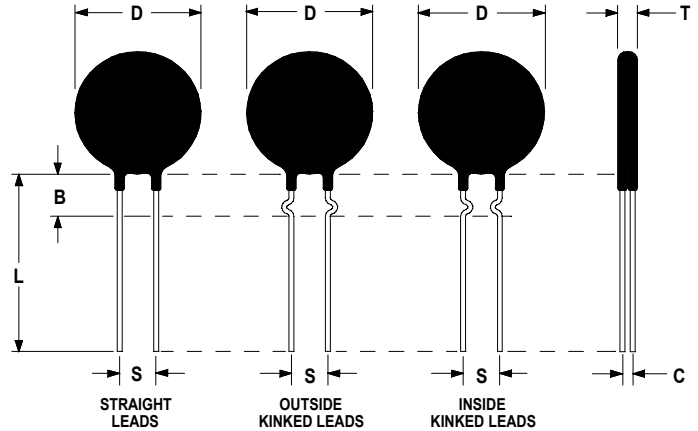

Electrical Specifications

R@25°C	50 Ω ±30%
Minimum Switching Current up @ 25°C	.19 Amp
Max Continuous Current @ 55°C	0.11 Amp
Reference Curie Temperature	120 °C
Maximum Voltage Rating	265 Vrms
Heat Capacity	0.64 Joules/°C
Dissipation Constant	10 Mw/°C
Thermal Time Constant	35 sec.
Body Temperature @ Max Voltage	122 °C

Ametherm, Inc
3111 N. Deer Run Road Bldg. 4
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775-884-0670
www.Ametherm.com