


Mechanical Specifications

D	12.0 mm Max
T	5.0 mm Max
Lead Diameter	0.6 mm Nom
S	6.4 mm Nom
L	38.0 mm Min
Straight Leads	Standard

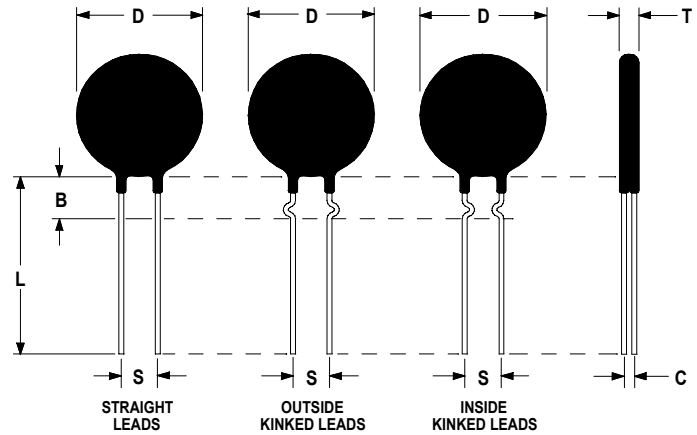

Electrical Specifications

Resistance @ 25°C	25 Ω ± 30%
Transition Temp	100 Deg C
Max voltage Rating	265 v rms
Switch Current @ 50°C	0.25A
Max Inrush current	2.00A
Max Continuous Current @ 0 °c	0.15A

**Ametherm, Inc**  
 3111 N. Deer Run Road Bldg. 4  
 Carson City, NV 89701  
 Telephone: **800-808-2434**  
 Fax: 775-884-0670  
[www.Ametherm.com](http://www.Ametherm.com)