


Mechanical Specifications

D	14.0 mm ± 1.0 mm
T	5.0 mm ± 0.5 mm
Lead Diameter	0.6 mm ± 0.1 mm
S	7.80 mm ± .30 mm
L	38.0 mm ± 1.50 mm
B	5.00 mm ± 0.2 mm
C	3.60 mm ± 0.40mm
Straight Lead	Standard

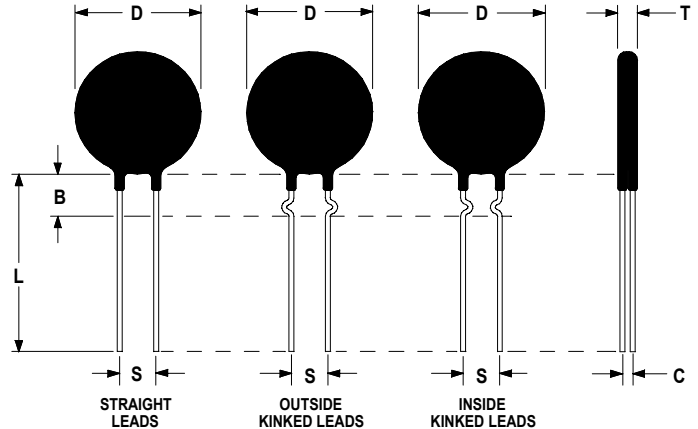

Electrical Specifications

<u>R@25°C</u>	25Ω ± 30%
Minimum Switching Current up @ 25°C	0.780 Amp
Maximum switching time @ Switching Current	≤ 15 seconds.
Max Continuous Current @ 55°C	0.190 Amp
Max In Rush Current	15.0 A rms
Reference Curie Temperature	110 °C
Maximum Voltage Rating	240 Vrms
Residual current at Max Voltage	14 mA
Heat Capacity	1.60 Joules/°C
Dissipation Constant	22Mw/°C
Thermal Time Constant	45 sec.
Body Temperature @ Max Voltage	158 °C

Ametherm, Inc
3111 N. Deer Run Road Bldg. 4
Carson City, NV 89701
Telephone: **800-808-2434**
Fax: 775-884-0670
www.Ametherm.com