


Mechanical Specifications

D	22.0 mm Max
T	5.0 mm Max
Lead Diameter	1.0 mm Nom
S	7.8 mm Nom
L	38.0 mm Min
Straight Leads	Standard

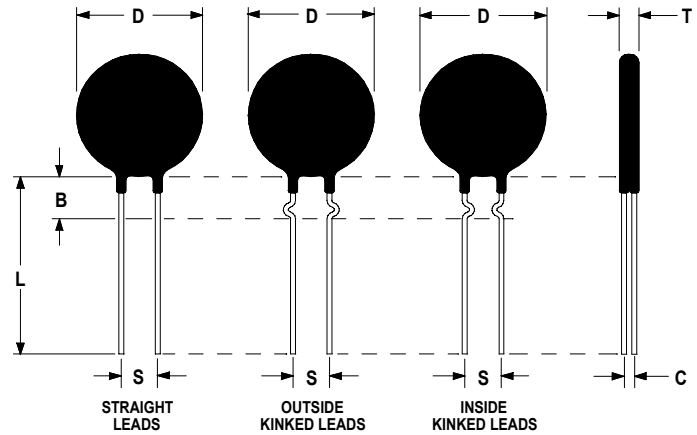

Electrical Specifications

Resistance @ 25°C	0.50 Ω ± 30%
Transition Temp	120 Deg C
Max voltage Rating	60 v rms
Switch Current @ 10°C	3.5 A
Continuous Current @ 55°C	2.0 A
Heat Capacity	2.0 Joules/°C
Dissipation Constant	22.50 mW/°C
Thermal Time Constant	65.0 seconds
Max Body Temperature @ Max voltage	174°C

**Ametherm, Inc**  
 3111 N. Deer Run Road Bldg. 4  
 Carson City, NV 89701  
 Telephone: **800-808-2434**  
 Fax: 775-884-0670  
[www.Ametherm.com](http://www.Ametherm.com)