


Mechanical Specifications

| | |
|----------------|-------------|
| D | 32.0 mm Max |
| T | 6.0 mm Max |
| Lead Diameter | 1.0 mm Nom |
| S | 7.8 mm Nom |
| L | 38.0 mm Min |
| Straight Leads | Standard |

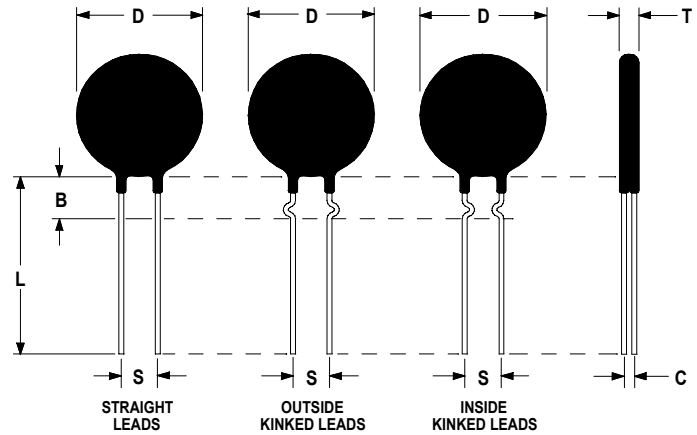

Electrical Specifications

| | |
|------------------------------------|---------------|
| Resistance @ 25°C | 2.5 Ω ± 30% |
| Transition Temp | 90 Deg C |
| Max voltage Rating | 160 v rms |
| Switch Current @ 25°C | 1.600A |
| Continuous Current @ 25°C | 0.800A |
| Heat Capacity | 2.0 Joules/°C |
| Dissipation Constant | 52.00 mW/°C |
| Thermal Time Constant | 75.0 seconds |
| Max Body Temperature @ Max voltage | 184°C |