


ET&FT CORES

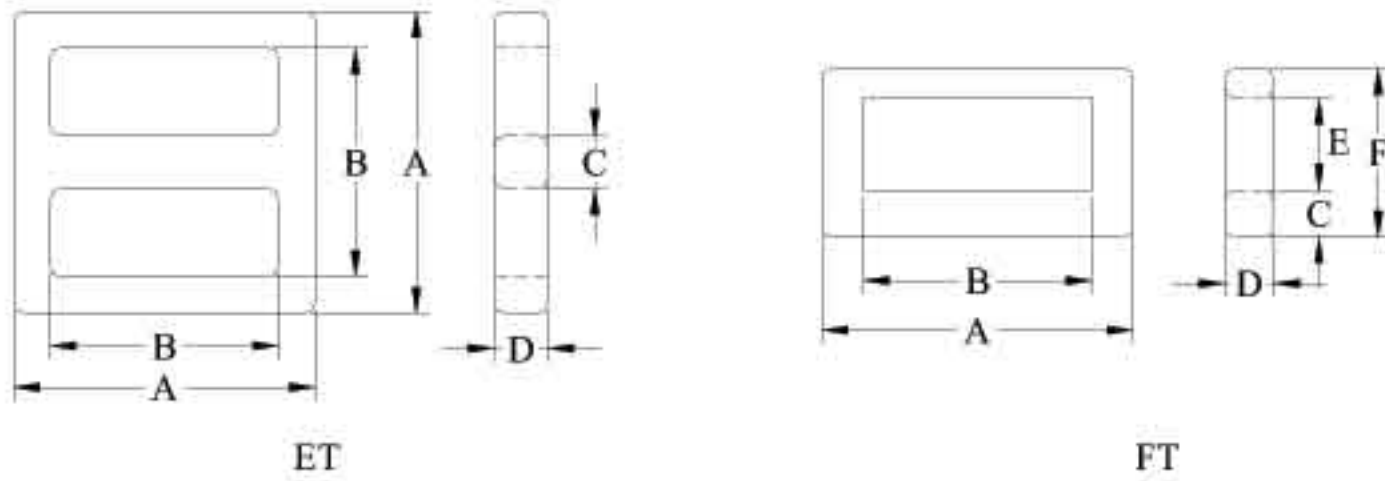

Type	Dimensions (mm)						W(g/set)
	A	B	C	D	E	F	
ET24	24.2 ^{+0.6} _{-0.5}	19.0 min	4.0±0.3	4.5±0.3			6
ET24A	24.2 ^{+0.6} _{-0.5}	19.0 min	4.0±0.3	4.0±0.3			5.6
ET28	28.7 ^{+0.3} _{-0.8}	22.2 min	5.0±0.3	5.0±0.3			10.2
ET29	29.0±0.5	22.0 min	5.1±0.3	5.2±0.3			11
ET35	35.3±0.6	26.8 min	7.5±0.3	7.5±0.3			25.8
FT20	20.6±0.3	15.7 min	4.2±0.2	4.6±0.2	7.35 min	14.1±0.3	3.8
FT30	30.0±0.3	21.9 min	4.5	4.7±0.3	7.7±0.3	16.2±0.3	7

A_L-value(nH/N² min): 1kHz , 10Ts , 25°C

Type	Effective Parameter				A _L	
	C _l (mm ⁻¹)	l _e (mm)	A _e (mm ²)	V _e (mm ³)	JH5	JH7
ET24	3.09	61.4	19.8	1220		2000
ET24A	3.4	60.3	17.5	1050		2000
ET28	2.70	70.0	27.0	1890		2450
ET35	1.46	85.2	58.3	4960		4600
FT20	4.37	52.9	12.1	638		1540
FT30	3.60	69.1	19.2	1330	1593	