

Quartz

Thru Hole

ADX Series





Package Type	ADXUM1 (UM-1) ADX49 (HC49/U)	pg19 pg19	ADXUM5 (UM-5) ADX49S (HC49/S)	pg19 pg20				
Frequency	MHz	M	KHz	K				
Frequency Tolerance @ 25°C	±100ppm ±50ppm ±45ppm	A B C	±40ppm ±35ppm ±30ppm	D E F	±25ppm ±20ppm ±15ppm	G H I	±10ppm ±5ppm	J K
Frequency Stability Over Temperature	±100 ppm ±50 ppm ±45 ppm	P Q R	±40 ppm ±35 ppm ±30 ppm	S T U	±25 ppm ±20 ppm ±15 ppm	V W X	±10 ppm ±5 ppm	Y Z
Operating Temperature Range	0°C to +70°C -10°C to +60°C	1 2	-20°C to +70°C -40°C to +75°C	3 4	-40°C to +85°C -40°C to +90°C	5 6	0°C to +55°C -40°C to +125°C	7 8
Operating Mode	Fundamental 3rd Overtone	F 3	5th Overtone 7th Overtone	5 7	9th Overtone	9		
Load Capacitance	6 pF 6 10 pF 10 12 pF 12	18 pF 18 20 pF 20 22 pF 22		30 pF 30 32 pF 32 50 pF 50		Series S		
Options	Third Lead	L	Insulator Tab	I	Tape & Reel	T	Vinyl Sleeving	V

EXAMPLE

PACKAGE TYPE

FREQUENCY

FREQUENCY TOLERANCE @ 25°C

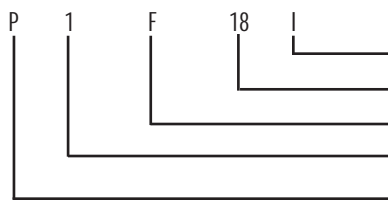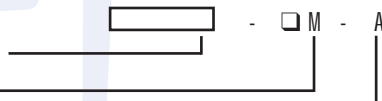

OPTIONS

LOAD CAPACITANCE

OPERATING MODE

OPERATING TEMPERATURE RANGE

FREQUENCY STABILITY OVER TEMPERATURE


Cylindrical

Package Type	ADX26T	pg21	ADX38T	pg22	ADX310	pg23
Frequency	MHz	M	KHz	K		
Frequency Tolerance @ 25°C	±100ppm ±50ppm ±45ppm ±40ppm	A B C D	±35ppm ±30ppm ±25ppm ±20ppm	E F G H	±15ppm ±10ppm ±5ppm	I J K
Load Capacitance	6 pF	6	7 pF	7	12.5 pF	12.5
Options	Bulk	Blank	Insulator Tab	I	Tape & Reel	T

EXAMPLE

PACKAGE TYPE

FREQUENCY TOLERANCE @ 25°C



FREQUENCY

OPTIONS

LOAD CAPACITANCE


ADX26T



FEATURES

- High Frequency Crystal in 2mm x 6mm
- Excellent Shock Resistance
- Excellent Environmental Characteristics
- Space Savings
- Formed Leads for SMT Application (-M)
- Applications, A/V Equipment, Communication Equipment, Measuring Instruments

UNIT DIMENSION (unit: mm)

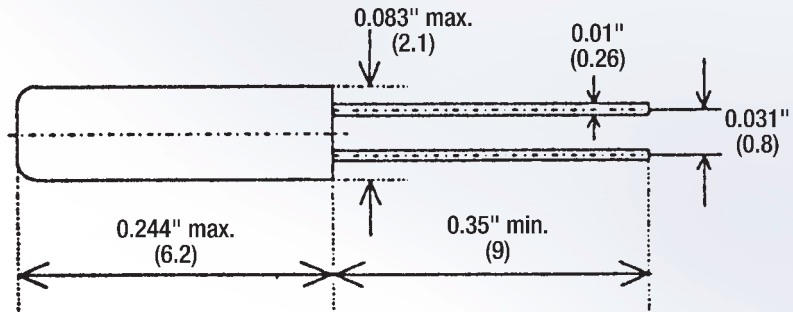

STANDARD SPECIFICATIONS

Package Type		ADX26T
Type		2 x 6 32.768 KHz Tuning Fork
Frequency Tolerance	$\Delta f/F$	± 20 ppm
Load Capacitance	CL	12.5 pF
Equivalent Series Resistance	Rs	30K Ω max.
Oscillation Frequency	F	32.768 KHz
Quality Factor	Q	50K min.
Shunt Capacitance	Co	1.6 pF
Shock Resistance	$\Delta f/F$	± 3 ppm
Turnover Temperature	Tt	25°C $\pm 5^\circ\text{C}$
Temperature Coefficient	β	-0.035 ± 0.005 ppm / $^\circ\text{C}^2$
Capacitance Ratio	γ	520, Typical
Drive Level	P	1 μW max.
Aging 1st Year	$\Delta f/F$	± 3 ppm max.
Insulation Resistance	IR	500M Ω min. at 100V DC
Operating Temperature Range	To	-10°C to +60°C