

ADSL TRANSFORMER**P2883****Features**

- * Ultra-low profile, 7mm
- * IEC 950, EN 60950 and EN 41003 certified
- * Supplementary Insulation
- * CSA NRTL/C Certificate of Compliance
- * BABT Certificate of Recognition
- * Excellent frequency characteristics
- * Low distortion
- * Use as 1:1 or 2:1 ratio
- * Vacuum encapsulated

Applications

- * ADSL

DESCRIPTION

P2883 is a microprofile transformer for ADSL applications requiring safety isolation to international standards.

The ADSL requirements for good balance and frequency response, with low levels of distortion are achieved in a miniature package with a high level of safety insulation.

P2883 is certified to safety standards IEC950, EN 60950 and EN 41003 for supplementary insulation, 250V working voltage. P2883 is supported by an IEC CB Test Certificate, CSA Certificate of Compliance and BABT Certificate.



to Electronic Techniques
(Anglia) Limited


SPECIFICATIONS

Electrical

At T = 25°C and reference circuit Fig. 1 unless otherwise stated. The convention used in this datasheet is that 'primary' windings are on the line side and 'secondary' windings are on the equipment side.

Parameter	Conditions	Min	Typ	Max	Units
Turns ratio	(3-5)+(4-6):(2-1)	0.98	1.00	1.02	
Primary inductance	3-6, 30kHz, 1V	25	40	-	mH
DC resistance	3-5 and 4-6	-	1.8	-	Ω
	1-2	-	1.2	-	Ω
Interwinding capacitance	1 & 2 linked:	-	30	-	pF
	3, 4, 5, 6 linked	-	-	-	-
Leakage inductance	3-6 (1-2 shorted)	-	5	12	μH
Insertion loss	500kHz	-	0.25	-	dB
Frequency response	30kHz - 1.1MHz	-	±0.1	-	dB
Phase response	30kHz - 1.1MHz	-	±5	-	degrees
Longitudinal balance	30kHz - 1.1MHz	40	-	-	dB
Return loss	30kHz - 500kHz	20	-	-	dB
	500kHz - 1.1MHz	14	18	-	dB
	1.1MHz - 2MHz	10	14	-	dB
Total Harmonic Distortion	4Vrms	-	-	-80	dBc
	30kHz - 1.1MHz	-	-	-	-
Voltage isolation	50Hz	2.12	-	-	kVrms
	DC	3.0	-	-	kV
Operating range:	Ambient temperature	0	-	+70	°C
		-40	-	+125	°C


Fig. 1 Reference Circuit

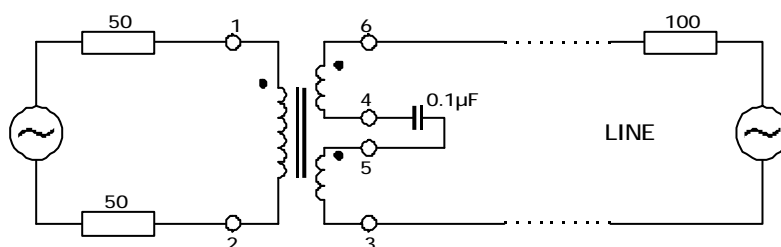


P2883

Notes:

1. The 0.1µF capacitor is fitted to block DC. It may be placed, as an alternative, in either leg of the line pair.
2. If desired, the transformer may be reversed so that the split winding is on the equipment side.
3. To effect a 1:2 step up to line, connect as shown in Fig. 2. The ratio between the two halves of the split winding is exactly 1.00:1.00 by design, and paralleling the windings is thus always acceptable.

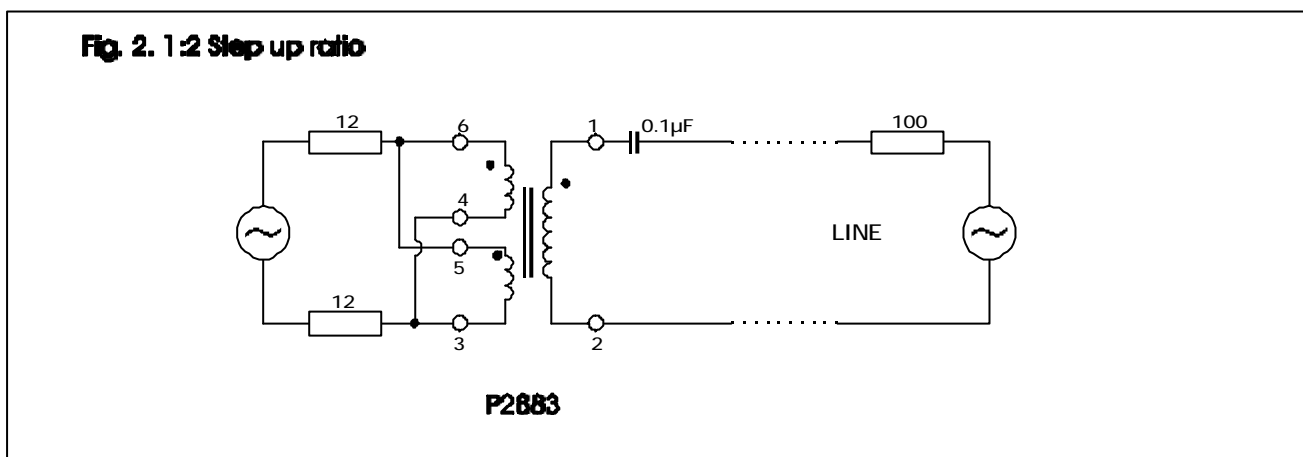

CONSTRUCTION

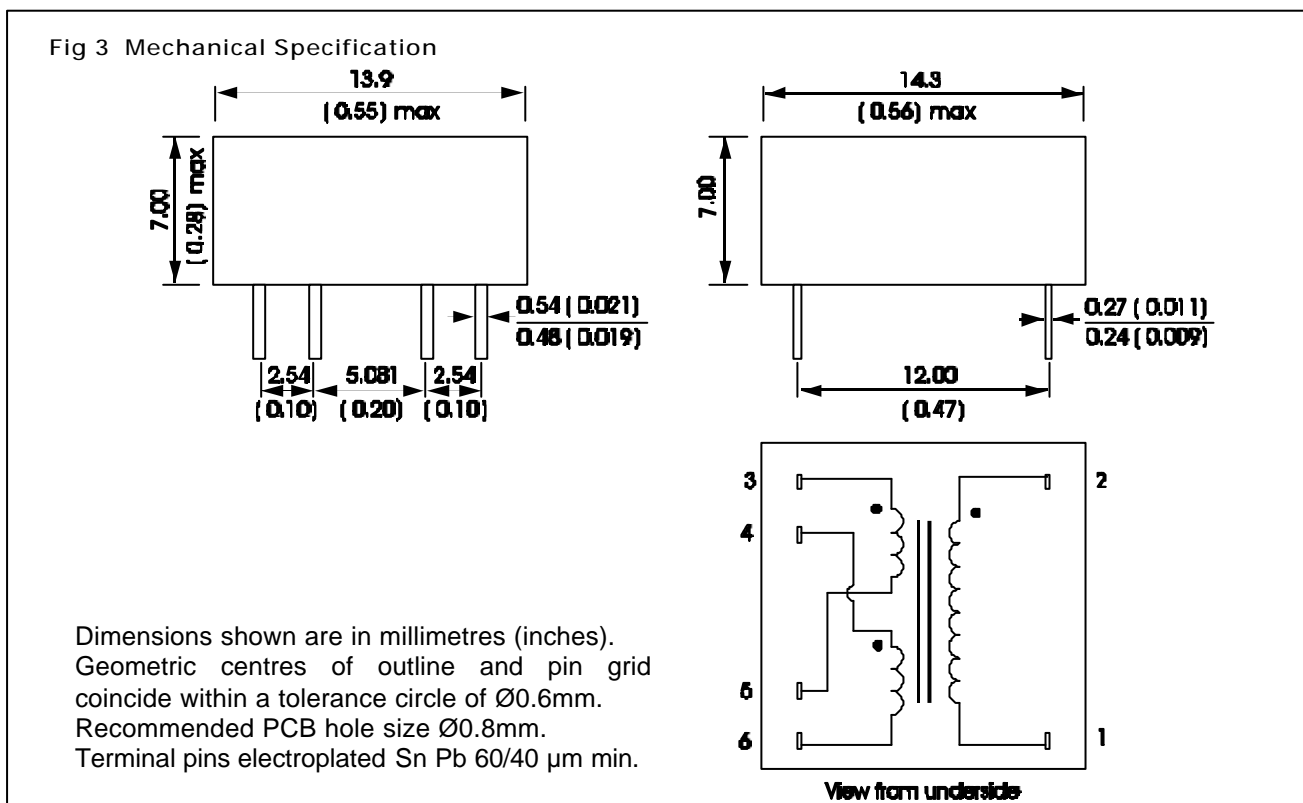

SAFETY

Constructed in accordance with IEC 950:1991, EN 60950:1992 (BS 7002:1992), supplementary insulation and BS EN 41003:1997, 250Vrms working.

ABSOLUTE MAXIMUM RATINGS

(Ratings of components independent of circuit).

Short term isolation voltage (1s)	2.12kVrms 3.0kVDC
Storage temperature	-40°C to +125°C
Lead temperature, 10s	260°C

CERTIFICATION

Certified by BSI to IEC 950:1991/A4:1996 (IEC CB Test Certificate No. GB541W) sub-clauses 2.2.2, 2.9.2, 2.9.3, 2.9.4, 2.9.6, 2.9.7, 4.4, 4.4.3.2 (class V-0) and 5.3 for a maximum working voltage of 250Vrms, nominal mains supply voltage not exceeding 300Vrms and a maximum operating temperature of +70°C in Pollution Degree 3 environment, supplementary insulation.

CAN/CSA C22.2 No. 950-95/UL1950, certified by CSA, Third Edition, including revisions through to revision date March 1, 1998, based on Fourth Amendment of IEC 950, Second Edition, maximum working voltage 250Vrms, Pollution Degree 2, supplementary insulation.

CSA Certificate of Compliance 1107696 (Master Contract 188107).
Certified by BABT to EN 60950.
BABT Certificate CR/0160.

Additionally, Profec Technologies certifies all transformers as providing voltage isolation of 2.12kVrms, 3kV DC minimum. All shipments are supported by a Certificate of Conformity to current applicable safety standards.

COPYRIGHT

ETAL and P2883 are Trade Marks of Profec Technologies Ltd.

The Trade Mark and Service Mark ETAL are registered at the UK Trade Marks Registry.

Profec Technologies Ltd. is the owner of the design right under the Copyright Designs and Patents Act 1988 and no rights or licences are hereby granted or implied to any third party.

© 1999 and 2000 Profec Technologies Ltd.
Reproduction prohibited.

PROFEC
TRANSFORMING THE FUTURE



ISO 9001
FM 25326

Profec Technologies Ltd, 10 Betts Avenue, Martlesham Heath, Ipswich, IP5 3RH, England
Telephone: +44 (0) 1473 611422 Fax: +44 (0) 1473 611919
Websites: www.etal.ltd.uk www.profec.com
Email: info@etal.ltd.uk sales@profec.com