

LOW COST, LOW DISTORTION LINE MATCHING TRANSFORMER

P3410

Features

- * Low cost
- * Low distortion
- * 12.6mm (0.5") seated height
- * Industry Standard Pinout
- * Extended Frequency Response
- * IEC 950, UL 1950 and EN 60950 Certified
- * UL Recognized Component
- * BAPT Certificate of Recognition
- * Flat TX and RX Responses
- * High thermal stability
- * Directly replaces 9010 and EMIT-4020L

Applications

- * V.90 and V.92 modems
- * V.34 modems

DESCRIPTION

P3410 is intended for V.90 and V.92 (56kbps) modems and other high-speed applications where low distortion at high power levels and very low voiceband frequencies is required at the most competitive price.

P3410 has extended flat frequency response from 30Hz to 4kHz with very low levels of signal distortion at signal frequencies as low as 150Hz.

P3410 is electrically and mechanically compatible with P3146 and P3176, and directly replaces 9010 and EMIT-4020L without changes to matching components, but with the added benefit of considerably improved thermal stability.

P3410 uses patented design and construction methods to achieve excellent signal performance and safety isolation to international standards at truly low cost. P3410 is certified to EN 60950, IEC 950, UL1950 and EN 41003. P3410 is a UL Recognized Component and is supported by a BAPT Certificate of Recognition and an IEC CB Test Certificate.

Patented



to Electronic Techniques
(Anglia) Limited

SPECIFICATIONS

Electrical

At T = 25°C and as circuit Fig. 2 unless otherwise stated.


Parameter	Conditions	Min	Typ	Max	Units
Insertion Loss	f = 2kHz, R _L = 510Ω	-	2.5	-	dB
	R _L = 600Ω	-	1.7	-	dB
Frequency Response	LF -3dB cutoff	-	10	-	Hz
	HF -3dB cutoff	-	6	-	kHz
	100Hz - 4kHz	-	±0.6	-	dB
Return Loss	200Hz - 4kHz	16	-	-	dB
Third Harmonic Distortion ⁽¹⁾	450Hz 0dBm in line	-	-85	-	dBm
	150Hz -3dBm	-	-78	-	dBm
Voltage isolation ⁽²⁾	50Hz	2.12	-	-	kVrms
	DC	3.0	-	-	kV
Operating range: Functional Storage	Ambient temperature	0	-	+70	°C
		-40	-	+85	°C

Lumped equivalent circuit parameters as Fig. 1

DC resistance R _{DC} ⁽³⁾	Sum of windings	180	-	220	Ω
Leakage inductance ΔL		22.3	-	27.7	mH
Shunt inductance L _p	200Hz 10mV	8.5	11	-	H
	200Hz 1V	-	19	-	H
Shunt loss R _p	200Hz 10mV	17	24	-	kΩ


Notes

- Third harmonic typically exceeds other harmonics by 10dB.
- Components are 100% tested at 3.25kV DC.
- Caution: do not pass DC through windings. Telephone line current, etc. must be diverted using choke or semiconductor line hold circuit.

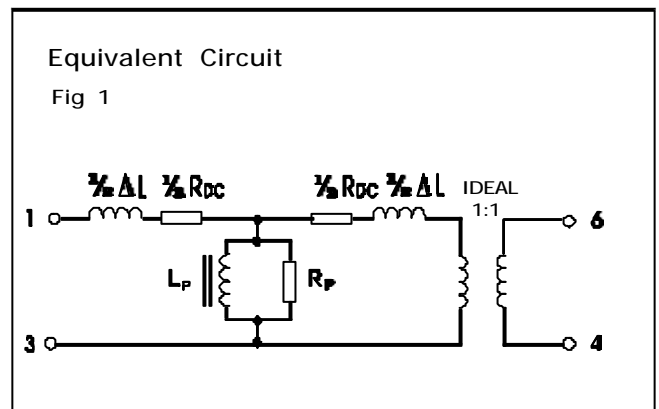


MATCHING RECOMMENDATIONS



600Ω MATCH

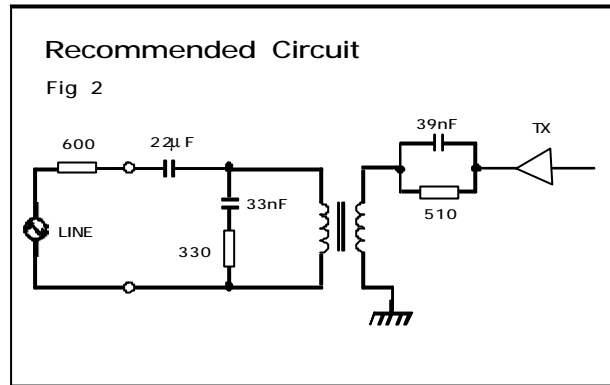

EUROPEAN CTR21 COMPLEX MATCH

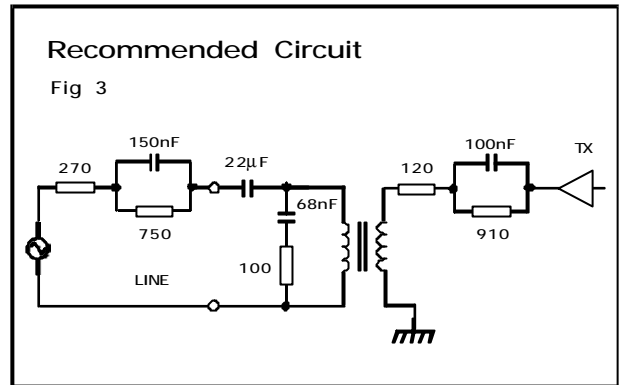

CONSTRUCTION

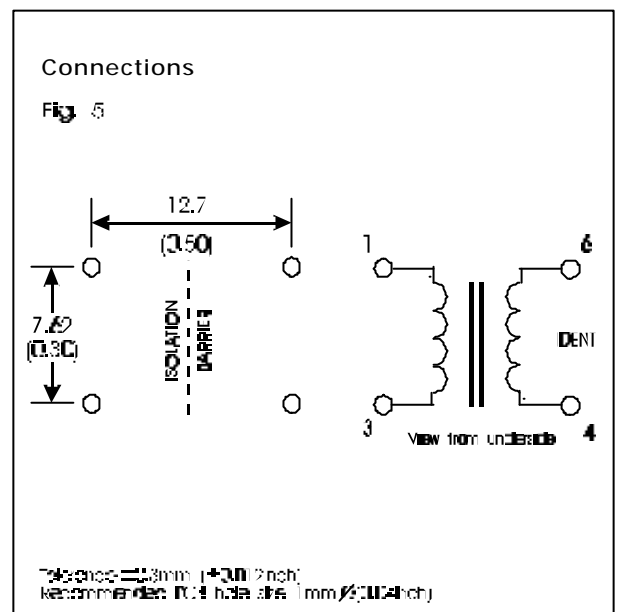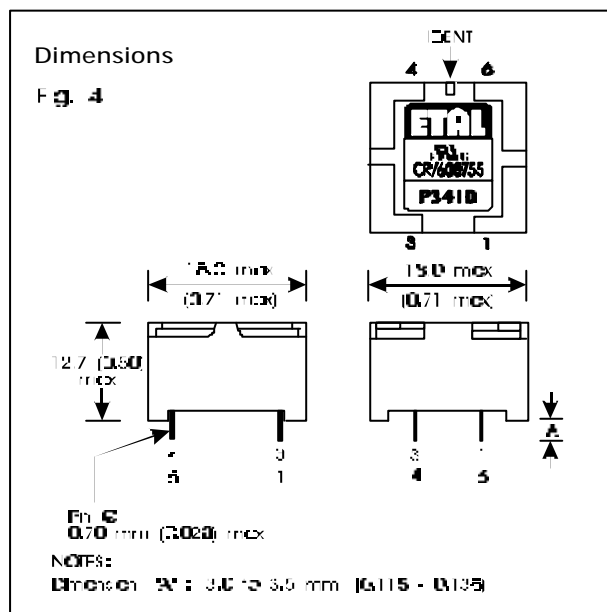

Dimensions shown are in millimetres (inches).
Geometric centres of outline and pin grid coincide within a tolerance circle of 0.6mm
Windings may be used interchangeably as primary or secondary.

Patented

SAFETY

Constructed in accordance with IEC950:1991, EN60950:1992 (BS7002:1992), supplementary insulation, 250Vrms maximum working voltage, flammability class V-0.

There are no special installation requirements (beyond attending to usual PCB track separations) since the integral cover provides supplementary insulation from its external faces to internal core and windings.

CERTIFICATION

Certified under the IEC CB scheme (Certificate GB445W) to IEC 950:1991, up to amendment 4, sub-clauses 1.5, 1.5.1, 1.5.3, 2.2, 2.2.3, 2.2.4, 2.9.2, 2.9.3, 2.9.4, 4.4, 4.4.3.2 (class V-0) and 5.3 for a maximum working voltage of 250Vrms, nominal mains supply voltage not exceeding 300Vrms and a maximum operating temperature of 70°C in Pollution Degree 2 environments.

Recognized under the Component Recognition Program of Underwriters Laboratories Inc. to US and Canadian requirements CAN/CSA C22.2 No. 950-95/UL1950, Third Edition, including revisions through to revision date March 1, 1998, based on Fourth Amendment of IEC 950, Second Edition, maximum working voltage 250Vrms, Pollution Degree 2, supplementary insulation.

UL File number E203175.
Approved and certified by BABT to EN 60950 and EN 41003.
BABT Certificate of Recognition 608755

Additionally, Profec Technologies certifies all transformers as providing voltage isolation of 2.12kVrms, 3kV DC minimum. All shipments are supported by a certificate of conformity to current applicable safety standards.

ABSOLUTE MAXIMUM RATINGS

(Ratings of components independent of circuit).

Short term isolation voltage (1s)	2.12kVrms, 3.0 kVDC
DC current	100µA
Storage temperature	-40°C to +85°C
Lead temperature, 10s	260°C

COPYRIGHT

ETAL, P3410, P3176 and P3146 are Trade Marks of Profec Technologies Ltd.
The Trade Mark ETAL is registered at the UK Trade Marks Registry.

Profec Technologies Ltd. is the owner of the design right under the Copyright Designs and Patents Act 1988 and no rights or licences are hereby granted or implied to any third party.

P3410 design and construction are protected by patents and registered design.
British Patent No. 2340667.
UK Registered Design No. 2077360.
French Registered Design No. 991512.
Germany Registered Design 49902311.0.
United States Registered Design 426,815.
Other patents and registered designs pending.

© 1998 - 2000 Profec Technologies Ltd.
Reproduction prohibited.

Patented

PROFEC
TRANSFORMING THE FUTURE



ISO 9001
FM 25326

Profec Technologies Ltd., 10 Betts Avenue, Martlesham Heath, Ipswich, IP5 3RH, England
Telephone: +44 (0) 1473 611422 Fax: +44 (0) 1473 611919
Websites: www.etal.ltd.uk www.profec.com
Email: info@etal.ltd.uk sales@profec.com