

PRODUCT DATA SHEET**ULTRA LOW PROFILE
POWER INDUCTOR****Features**

- * Current handling (Saturation to 2A)
- * Ultra Low profile (to 1mm)
- * Surface Mount
- * Robust construction
- * Flat top for pick & place
- * Pb-free


P7606 Family**Applications**

- * PC Cards
- * Electroluminescent displays
- * LCD drivers
- * Hybrids
- * Daughter boards
- * Portable equipment


DESCRIPTION

The P7606 family comprises very low profile inductors for height constrained applications. Four sizes are available using the same PCB footprint but varying in height from 1.0 to 2.5mm. Despite their small size, these inductors are capable of being used in genuine power applications with saturation currents up to 2A.


The family covers inductance over a wide range from 2.2 μ H to 3300 μ H. The parts are mechanically robust and are supplied with Pb-free terminations suitable for Pb-free and conventional placement and reflow.



P7606-5210



P7606-5212



P7606-5215




P7606-5225

CONSTRUCTION


P7606-5210 dimensions

Fig. 1

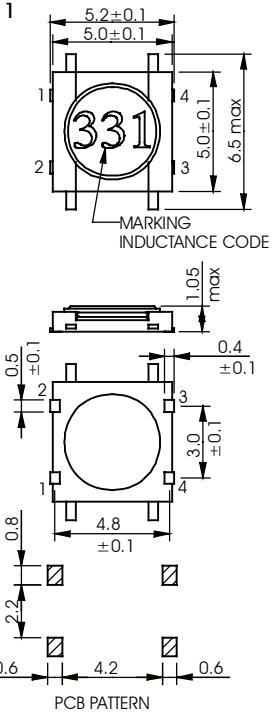


P7606-5212 dimensions

Fig. 2

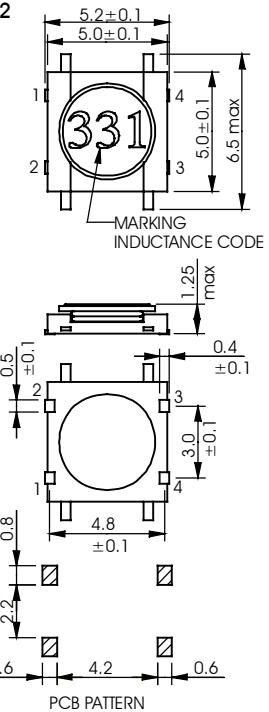


P7606-5215 dimensions

Fig. 3

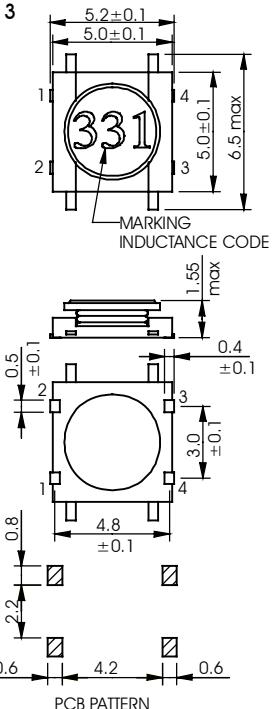

P7606-5225 dimensions

Fig. 4

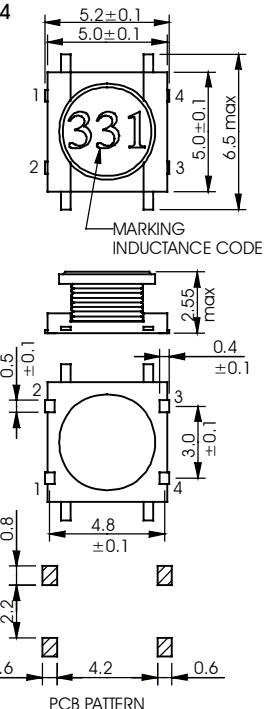

Dimensions shown are in millimetres.

Connection is made using pins 1 and 3.

Recommended reflow solder profile: 2 minutes (min) @ 100-150°C, 10 seconds (max) @ 230°C; time above 200°C 30 seconds maximum.

SPECIFICATIONS**Electrical**

5210 size

Part Number	Inductance (μ H) ⁽¹⁾	DCR (Ω) Max	I_{RMS1} (A) ⁽²⁾	I_{RMS2} (A) ⁽²⁾	I_{sat} (A) ⁽³⁾
P7606-5210-2R2M	2.2±20%	0.18	0.51	0.76	1.7
P7606-5210-3R3M	3.3±20%	0.22	0.46	0.69	1.5
P7606-5210-4R7M	4.7±20%	0.28	0.41	0.61	1.3
P7606-5210-6R8M	6.8±20%	0.38	0.35	0.52	1.1
P7606-5210-100M	10±20%	0.61	0.27	0.41	0.90
P7606-5210-150M	15±20%	0.82	0.24	0.35	0.73
P7606-5210-220M	22±20%	1.1	0.20	0.31	0.62
P7606-5210-330M	33±20%	1.9	0.15	0.23	0.52
P7606-5210-470M	47±20%	2.4	0.14	0.21	0.42

5212 size

Part Number	Inductance (μ H) ⁽¹⁾	DCR (Ω) Max	I_{RMS1} (A) ⁽²⁾	I_{RMS2} (A) ⁽²⁾	I_{sat} (A) ⁽³⁾
P7606-5212-2R2M	2.2±20%	0.18	0.55	0.82	2.0
P7606-5212-3R3M	3.3±20%	0.22	0.50	0.74	1.8
P7606-5212-4R7M	4.7±20%	0.27	0.45	0.67	1.5
P7606-5212-6R8M	6.8±20%	0.37	0.38	0.57	1.3
P7606-5212-100M	10±20%	0.48	0.33	0.50	1.1
P7606-5212-150M	15±20%	0.62	0.29	0.44	0.95
P7606-5212-220M	22±20%	1.0	0.23	0.35	0.77
P7606-5212-330M	33±20%	1.4	0.19	0.29	0.60
P7606-5212-470M	47±20%	2.2	0.15	0.23	0.51

5215 size

Part Number	Inductance (μ H) ⁽¹⁾	DCR (Ω) Max	I_{RMS1} (A) ⁽²⁾	I_{RMS2} (A) ⁽²⁾	I_{sat} (A) ⁽³⁾
P7606-5215-101M	100±20%	3.2	0.16	0.24	0.50
P7606-5215-151M	150±20%	5.0	0.13	0.19	0.35
P7606-5215-221M	220±20%	6.5	0.11	0.17	0.30
P7606-5215-331M	330±20%	12	0.085	0.12	0.22
P7606-5215-471M	470±20%	22	0.060	0.090	0.17
P7606-5215-631M	630±20%	27	0.055	0.080	0.15
P7606-5215-102M	1000±20%	33	0.050	0.075	0.13

Notes


1. Inductance measured at 100kHz, 1V.
2. I_{RMS1} and I_{RMS2} are the currents at which the temperature rises 20°C and 40°C typical respectively.
3. Saturation Current, I_{sat} , is the DC current at which the zero current inductance drops by 10% (typ).
4. Operating temperature -25°C to +85°C.
5. For non-standard inductance values, please contact Profec.

5225 size

Part Number	Inductance (μ H) ⁽¹⁾	DCR (Ω) Max	I_{RMS1} (A) ⁽²⁾	I_{RMS2} (A) ⁽²⁾	I_{sat} (A) ⁽³⁾
P7606-5225-101M	100 \pm 20%	1.6	0.24	0.36	0.45
P7606-5225-151M	150 \pm 20%	2.5	0.19	0.29	0.35
P7606-5225-221M	220 \pm 20%	3.8	0.16	0.23	0.30
P7606-5225-331M	330 \pm 20%	5.9	0.13	0.19	0.25
P7606-5225-471M	470 \pm 20%	7.5	0.11	0.17	0.22
P7606-5225-681M	680 \pm 20%	12	0.090	0.13	0.18
P7606-5225-102M	1000 \pm 20%	20	0.070	0.10	0.14
P7606-5225-152M	1500 \pm 20%	25	0.060	0.090	0.12
P7606-5225-222M	2200 \pm 20%	45	0.045	0.065	0.09
P7606-5225-332M	3300 \pm 20%	60	0.040	0.060	0.08

Notes

1. Inductance measured at 100kHz, 1V.
2. I_{RMS1} and I_{RMS2} are the currents at which the temperature rises 20°C and 40°C typical respectively.
3. Saturation Current, I_{sat} , is the DC current at which the zero current inductance drops by 10% (typ).
4. Operating temperature -25°C to +85°C.
5. For non-standard inductance values, please contact Profec.

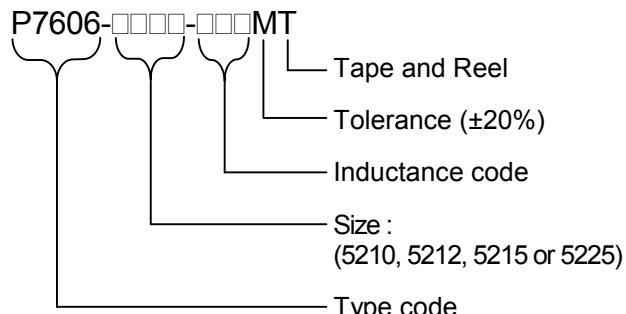ORDERING CODE**ABSOLUTE MAXIMUM RATINGS**

Storage temperature	-40°C to +105°C
Operating temperature	-25°C to +85°C
Soldering temperature profile peak	260°C 10s

PROFEC
TRANSFORMING THE FUTURE



ISO 9001
FM 25326

Profec Technologies Ltd., 10 Betts Avenue, Martlesham Heath, Ipswich, IP5 3RH, England

Telephone: +44 (0) 1473 611422

Website: www.profec.com

Fax: +44 (0) 1473 611919

Email: info@profec.co.uk, sales@profec.com